

Reproduction Report

A Hierarchical Probabilistic U-Net

Divyashree Doddbele Aswatha Narayana

August 31, 2025

1 Introduction

In medical imaging, scans often contain ambiguity. For example, in a lung CT scan, a lesion may look almost the same whether it is cancerous or not. This creates ambiguity because the same image can lead to multiple valid segmentations. Traditional segmentation models usually give only one output, which may hide these uncertainties and lead to wrong decisions in medical use.

The **Probabilistic U-Net (sPU-Net)** [1] was proposed to solve this problem. It combines a U-Net [3] with a conditional variational autoencoder (cVAE), so the model can generate many different but consistent segmentations. Later, the **Hierarchical Probabilistic U-Net (HPU-Net)** [2] improved on this idea by introducing a hierarchy of latent variables. This hierarchy allows the model to capture both large global differences (like lesion presence) and small local details (like fuzzy edges). With this, the HPU-Net provides better results and a more realistic description of uncertainty in medical images.

In this report, we reproduce Figure 2 from the Hierarchical Probabilistic U-Net (HPU-Net) paper [2]. The figure compares the Probabilistic U-Net (sPU-Net) [1] and the HPU-Net on the LIDC-IDRI dataset. The original code released by the authors at DeepMind was written in TensorFlow,¹ while in this work the models were re-implemented in PyTorch² to faithfully reproduce Figure 2 from the original work³. We trained both models using the setups described in the respective papers and present the results. The report covers dataset preparation, model architecture, training, and evaluation.

This report is organized as follows. Section 2 explains the models and the training details. Section 3 shows the reproduction results. Section 4 presents the conclusion and outlook. Section 5 gives acknowledgments and references.

2 Architecture and Training

Both the sPU-Net and HPU-Net are generative segmentation models that can produce multiple possible outputs for the same input image. They do this by sampling latent variables and then reconstructing the segmentation maps from them.

Sampling: To generate a segmentation, the model samples latent variables from a prior distribution. The prior is modeled as a Gaussian, with mean and variance predicted from the input image [1]. In the sPU-Net this is a single global latent vector, while the HPU-Net extends this idea with hierarchical latent maps [2]. At each decoder scale, a latent map is sampled and concatenated

¹https://github.com/SimonKohl/probabilistic_unet

²<https://github.com/divya-dan/HPU-Net>

³https://github.com/google-deepmind/deepmind-research/tree/master/hierarchical_probabilistic_unet

with the decoder features before up-sampling and merging with encoder features. The higher-scale latents depend on both the image and the latents sampled at lower scales, forming a hierarchical prior. Each run of the network with a new sample produces a different but plausible segmentation, and only the decoder part needs to be rerun to generate multiple hypotheses for the same image [2].

Training: Both sPU-Net and HPU-Net are trained using the variational autoencoder (VAE) framework, which maximizes the evidence lower bound (ELBO) on the likelihood of predicting the segmentation from the image [7, 1]. In this setup, the model learns a posterior distribution that depends on both the input image and the ground-truth segmentation. During training, latent variables are sampled from this posterior and passed through the decoder to reconstruct the segmentation.

The training loss has two parts: 1) a reconstruction loss, defined as cross-entropy between prediction and target, 2) a Kullback–Leibler (KL) divergence, which encourages the posterior to be close to the prior [2].

Unlike standard segmentation, the reconstruction error is summed over pixels before averaging across the batch, and then reported per pixel for comparability.

Plain ELBO can lead to weak priors. To address this, the HPU-Net uses the GECO objective [4], which dynamically balances the reconstruction and KL terms. GECO sets a target reconstruction level τ and update a Lagrange multiplier λ from an **exponential moving average** of the gap $E[L_{\text{rec}}] - \tau$ [4]. Early on, this pushes the model to hit the target, then the emphasis shifts to the KL term, strengthening the prior.

Additionally, HPU-Net applies hard negative mining; Only the worst 2% pixels in each batch are used for backpropagation [8]. This forces the model to focus on the most difficult pixels and improves segmentation performance.

In the sPU-Net, a separate prior network predicts the latent distribution. The HPU-Net removes this and instead uses U-Net features to predict the prior, which reduces parameters and speeds up training.

2.1 Dataset

The LIDC-IDRI dataset [5, 6] contains 1018 lung CT scans from 1010 patients, with manual lesion segmentations provided by four experts. For the reproduction we used the preprocessed version of this dataset available in a public Google Cloud Storage bucket⁴, which contains cropped images prepared for the HPU-Net experiments. Following the setup in [1], we used annotations from a second reading and split the data into 722 patients for training, 144 for validation, and 144 for testing.

⁴https://console.cloud.google.com/storage/browser/hpunet-data/lidc_crops

Each scan was cropped into 2D images of size 180×180 pixels, resulting in 8882 training, 1996 validation, and 1992 test images. Crops were centered on positions where at least one grader marked a lesion.

In this dataset, even empty masks are valid expert labels, so we treat $\text{IoU} = 1$ when the model correctly predicts the absence of a lesion. The reconstruction IoU (IoU_{rec}) is averaged across all four graders. As in [1], we only used lesions described as polygons in the XML files and larger than 3mm, since smaller ones are considered less relevant [5]. We also filtered out inconsistent DICOM slices and assumed that masks from different graders belonged to the same lesion if their bounding boxes overlapped.

2.2 Training

Data augmentation: During training [2], we apply random augmentations to both images and labels (180×180 pixel tiles), including random elastic deformation, rotation, mirroring, shearing, scaling, and random translated crops, resulting in 128×128 tiles. Any padding introduced during augmentation is masked from the loss.

2.2.1 HPU-Net

The HPU-Net [2] is based on an 8-scale U-Net. Each stage of the encoder and decoder contains three pre-activated residual blocks with 3×3 convolutions. When the number of feature channels changes, a 1×1 convolution is used in the skip connection to keep the dimensions consistent.

The images are reduced in size step by step using average pooling for down-sampling, and then enlarged again with nearest-neighbor interpolation for up-sampling. Skip connections link encoder and decoder features at every scale, so that fine image details from the encoder are carried over to the decoder.

The model begins with 24 channels and doubles them at each down-sampling stage, up to a maximum of 192. The encoder compresses the input from 128×128 pixels down to a single 1×1 feature map, which encodes the global information of the image.

In the decoder, a latent map is added at each of the 8 scales, from a global 1×1 level to a fine 128×128 level. This hierarchical design helps the model capture both large-scale uncertainties (for example, whether a lesion is present) and fine-scale details (such as fuzzy boundaries). To make training focus on the most difficult areas, only the hardest 2% of pixels are backpropagated, selected stochastically using Gumbel sampling.

Training setup:

- Batch size: 32

- Training steps: 240,000 iterations
- Optimizer: Adam with weight decay 1×10^{-5}
- Learning rate: 1×10^{-4} , reduced stepwise to 0.5×10^{-5} during training
- Loss function: GEBO objective with
 - reconstruction constraint $\kappa = 0.05$,
 - exponential moving average factor $\alpha = 0.99$,
 - initial multiplier $\lambda = 1.0$,
 - step size = 0.01.

2.2.2 sPU-Net

The sPU-Net [1] is based on a 5-scale U-Net. Each block of the encoder and decoder has three 3×3 convolution layers with ReLU activations. Down-sampling and up-sampling are done with bilinear interpolation, and skip connections link encoder and decoder features so that spatial details are preserved.

The network starts with 32 channels, doubling at each stage up to 512 at the bottleneck. At this bottleneck, a single *global latent vector with six dimensions* is sampled. The latent distribution is predicted by two networks: a prior network, which depends only on the input image, and a posterior network, which depends on both the image and the ground-truth segmentation.

The latent vector is broadcast to match the decoder resolution, concatenated with decoder features, and passed through a sequence of 1×1 convolutions to produce the final segmentation map.

Training setup:

- Batch size: 32
- Training steps: 240,000 iterations
- Optimizer: Adam with weight decay 1×10^{-5}
- Learning rate: 1×10^{-5} , lowered stepwise to 1×10^{-6} over 5 decay steps.
- Loss: Standard ELBO with $\beta = 1$:

$$\mathcal{L} = \text{Reconstruction BCE} + \text{KL divergence}$$

The reconstruction loss is summed over pixels, averaged per image, and then averaged across the batch.

3 Results

The original paper reports that HPU-Net performs better than sPU-Net in terms of reconstruction quality (IoU) and distribution agreement. My reproduction also shows similar trends. Below is a placeholder for the reproduced image and a table to report measured metrics.

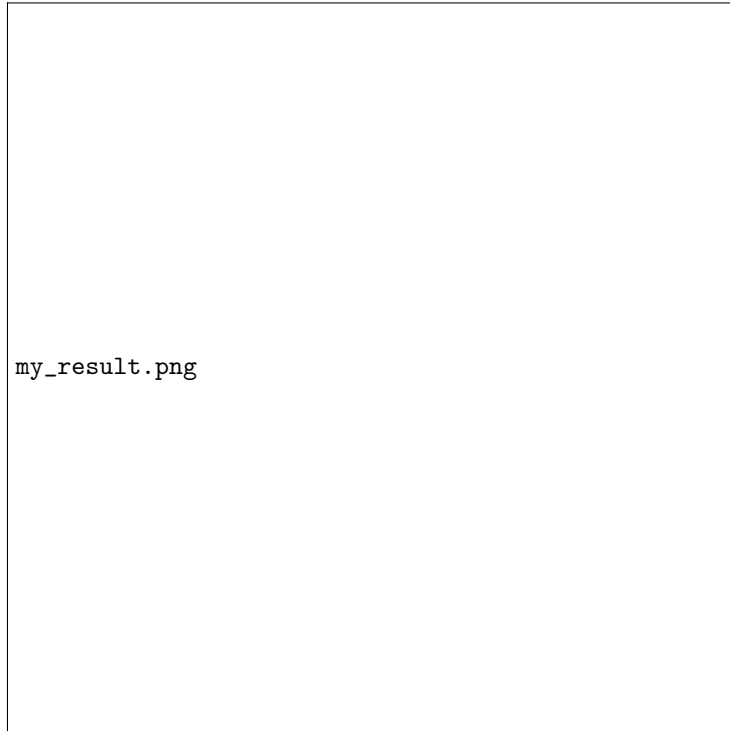


Figure 1: Reproduction of Figure 2 from the HPU-Net paper.

Model	Reconstruction IoU	Hungarian-matched IoU
sPU-Net	—	—
HPU-Net	—	—

Table 1: Placeholder table for evaluation metrics. Values to be filled after measurements.

4 Conclusion and Outlook

This work reproduced Figure 2 from the HPU-Net paper and showed that the HPU-Net performs better than the sPU-Net on the LIDC-IDRI dataset. The

results support the idea that adding hierarchical latent variables improves both reconstruction quality and the modeling of uncertainty.

As future work, the same setup can be tested on other datasets such as SNEMI3D or Cityscapes. It can also be extended by trying different numbers of latent scales or other training objectives to study their effect on segmentation quality and uncertainty. The code and setup used here can be reused and adapted for such experiments on other medical imaging datasets.

5 Acknowledgement

We would like to thank the authors of the Probabilistic U-Net [1] and Hierarchical Probabilistic U-Net [2] papers for making their work available. I also acknowledge the LIDC-IDRI dataset [5, 6], which made this reproduction possible.

References

- [1] S. A. A. Kohl, B. Romera-Paredes, C. Meyer, J. De Fauw, J. Ledsam, K. Maier-Hein, S. Eslami, D. J. Rezende, and O. Ronneberger. A Probabilistic U-Net for Segmentation of Ambiguous Images. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- [2] S. A. A. Kohl, B. Romera-Paredes, K. Maier-Hein, D. J. Rezende, S. Eslami, P. Kohli, A. Zisserman, and O. Ronneberger. A Hierarchical Probabilistic U-Net for Modeling Multi-Scale Ambiguities. arXiv preprint arXiv:1905.13077, 2019.
- [3] O. Ronneberger, P. Fischer, and T. Brox. U-Net: Convolutional Networks for Biomedical Image Segmentation. In *MICCAI*, 2015.
- [4] D. J. Rezende and F. Viola. Taming VAEs. arXiv preprint arXiv:1810.00597, 2018.
- [5] S. G. Armato et al. The Lung Image Database Consortium (LIDC) and Image Database Resource Initiative (IDRI). *Medical Physics*, 38(2):915–931, 2011.
- [6] K. Clark et al. The Cancer Imaging Archive (TCIA): Maintaining and Operating a Public Information Repository. *Journal of Digital Imaging*, 26(6):1045–1057, 2013.
- [7] D. P. Kingma and M. Welling. Auto-Encoding Variational Bayes. In *International Conference on Learning Representations (ICLR)*, 2014.
- [8] A. Shrivastava, A. Gupta, and R. Girshick. Training region-based object detectors with online hard example mining. In *Proceedings of the IEEE*

Conference on Computer Vision and Pattern Recognition (CVPR), pages
761–769, 2016.