


The JOIN operation

Language:	English • 日本語 • 中文
-----------	--------------------

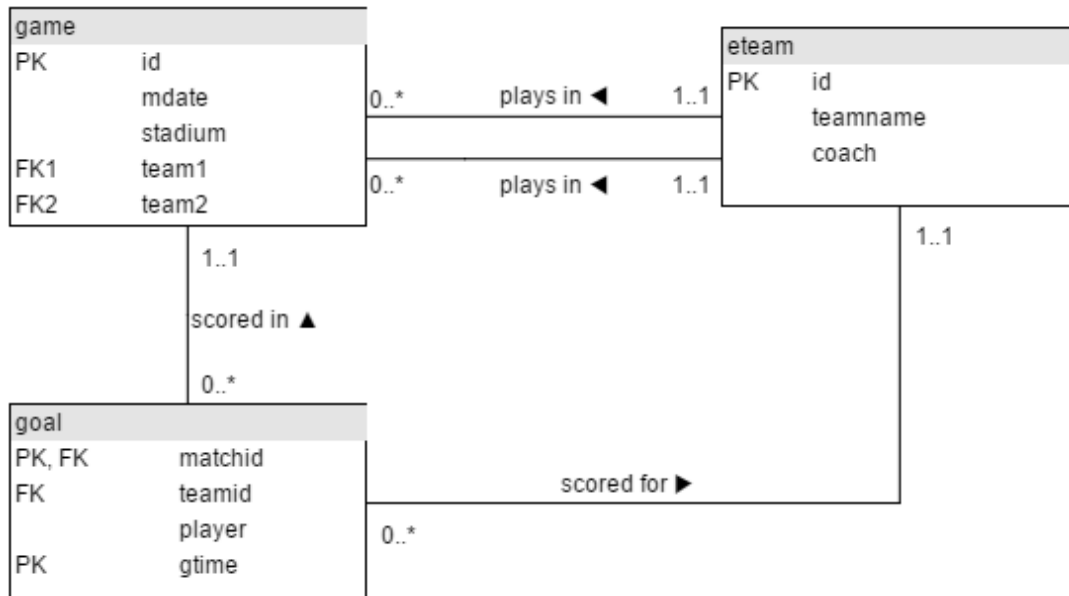

game

id	mdate	stadium	team1	team2
1001	8 June 2012	National Stadium, Warsaw	POL	GRE
1002	8 June 2012	Stadion Miejski (Wroclaw)	RUS	CZE
1003	12 June 2012	Stadion Miejski (Wroclaw)	GRE	CZE
1004	12 June 2012	National Stadium, Warsaw	POL	RUS
...				

goal

matchid	teamid	player	gtime
1001	POL	Robert Lewandowski	17
1001	GRE	Dimitris Salpingidis	51
1002	RUS	Alan Dzagoev	15
1002	RUS	Roman Pavlyuchenko	82
...			

eteam

id	teamname	coach
POL	Poland	Franciszek Smuda
RUS	Russia	Dick Advocaat
CZE	Czech Republic	Michal Bilek

GRE	Greece	Fernando Santos
...		

JOIN and UEFA EURO 2012

This tutorial introduces JOIN which allows you to use data from two or more tables. The tables contain all matches and goals from UEFA EURO 2012 Football Championship in Poland and Ukraine.

The data is available (mysql format) at <http://sqlzoo.net/euro2012.sql>

Summary

1.

The first example shows the goal scored by a player with the last name 'Bender'. The * says to list all the columns in the table - a shorter way of saying matchid, teamid, player, gtime

Modify it to show the *matchid* and *player* name for all goals scored by Germany. To identify German players, check for: teamid = 'GER'

```
SELECT matchid, player
FROM goal
WHERE teamid = 'GER';
```

Submit SQL

restore default

Correct answer

matchid	player
1008	Mario Gómez
1010	Mario Gómez
1010	Mario Gómez
1012	Lukas Podolski
1012	Lars Bender
1026	Philipp Lahm

1026

Sami Khedira

2.

From the previous query you can see that Lars Bender's scored a goal in game 1012. Now we want to know what teams were playing in that match.

Notice in the that the column `matchid` in the `goal` table corresponds to the `id` column in the `game` table. We can look up information about game 1012 by finding that row in the **game** table.

Show id, stadium, team1, team2 for just game 1012

```
SELECT id, stadium, team1, team2
FROM game
WHERE id = 1012;
```

Submit SQL[restore default](#)

Correct answer

id	stadium	team1	team2
1012	Arena Lviv	DEN	GER

3.

You can combine the two steps into a single query with a JOIN.

```
SELECT *  
FROM game JOIN goal ON (id=matchid)
```

The **FROM** clause says to merge data from the goal table with that from the game table. The **ON** says how to figure out which rows in **game** go with which rows in **goal** - the **matchid** from **goal** must match **id** from **game**. (If we wanted to be more clear/specific we could say **ON (game.id=goal.matchid)**)

The code below shows the player (from the goal) and stadium name (from the game table) for every goal scored.

Modify it to show the player, teamid, stadium and mdate for every German goal.

```
SELECT goal.player,  
       goal.teamid,  
       game.stadium,  
       game.mdate  
FROM game  
JOIN goal
```

Submit SQL

restore default

Correct answer

player	teamid	stadium	mdate
Mario Gómez	GER	Arena Lviv	9 June 2012
Mario Gómez	GER	Metalist Stadium	13 June 2012
Mario Gómez	GER	Metalist Stadium	13 June 2012
Lukas Podolski	GER	Arena Lviv	17 June 2012
Lars Bender	GER	Arena Lviv	17 June 2012
Philipp Lahm	GER	PGE Arena Gdansk	22 June 2012
Sami Khedira	GER	PGE Arena Gdansk	22 June 2012
Miroslav Klose	GER	PGE Arena Gdansk	22 June 2012

4.

Use the same JOIN as in the previous question.

Show the team1, team2 and player for every goal scored by a player called Mario `player LIKE 'Mario%'`

```
SELECT game.team1,  
       game.team2,  
       goal.player  
FROM game  
JOIN goal  
ON game.id = goal.matchid
```

Submit SQL

restore default

Correct answer

team1	team2	player
GER	POR	Mario Gómez
NED	GER	Mario Gómez
NED	GER	Mario Gómez
IRL	CRO	Mario Mandžukic
IRL	CRO	Mario Mandžukic
ITA	CRO	Mario Mandžukic
ITA	IRL	Mario Balotelli
GER	ITA	Mario Balotelli

5.

The table eteam gives details of every national team including the coach. You can JOIN goal to eteam using the phrase `goal JOIN eteam on teamid=id`

Show player, teamid, coach, gtime for all goals scored in the first 10 minutes `gtime<=10`

```
SELECT goal.player,  
       goal.teamid,  
       eteam.coach,  
       goal.gtime  
FROM goal  
JOIN eteam
```

[Submit SQL](#)[restore default](#)

Correct answer

player	teamid	coach	gtime
Petr Jiráček	CZE	Michal Bílek	3
Václav Pilar	CZE	Michal Bílek	6
Mario Mandžukic	CRO	Slaven Bilic	3
Fernando Torres	ESP	Vicente del Bosque	4

6.

To JOIN game with eteam you could use either

game JOIN eteam ON (team1=etteam.id) or game JOIN eteam ON (team2=etteam.id)

Notice that because id is a column name in both game and eteam you must specify eteam.id instead of just id

List the dates of the matches and the name of the team in which 'Fernando Santos' was the team1 coach.

```
    eteam.teamname
FROM game
JOIN eteam
ON game.team1 = eteam.id
WHERE eteam.coach = 'Fernando Santos';
```

[Submit SQL](#)[restore default](#)

Correct answer

mdate	teamname
12 June 2012	Greece
16 June 2012	Greece

7.

List the player for every goal scored in a game where the stadium was 'National Stadium, Warsaw'

```
SELECT goal.player
FROM goal
JOIN game
ON goal.matchid = game.id
WHERE game.stadium = 'National Stadium, Warsaw';
```

[Submit SQL](#)[restore default](#)

Correct answer

player
Robert Lewandowski
Dimitris Salpingidis
Alan Dzagoev
Jakub Blaszczykowski
Giorgos Karagounis
Cristiano Ronaldo
Mario Balotelli
Mario Balotelli

More difficult questions

8.

The example query shows all goals scored in the Germany-Greece quarterfinal.

Instead show the name of all players who scored a goal against Germany.

HINT


```
SELECT DISTINCT g.player
FROM game AS ga
JOIN goal AS g
ON ga.id = g.matchid
WHERE (ga.team1 = 'GER' OR ga.team2 = 'GER')
AND g.teamid <> 'GER';
```

[Submit SQL](#)[restore default](#)

Correct answer

player
Robin van Persie
Michael Krohn-Dehli
Georgios Samaras
Dimitris Salpingidis
Mario Balotelli

9.

Show teamname and the total number of goals scored.

COUNT and GROUP BY

```
SELECT e.teamname, COUNT(g.player) AS total_goals
FROM goal g
JOIN eteam e
ON g.teamid = e.id
GROUP BY e.teamname;
```

[Submit SQL](#)[restore default](#)

Correct answer

teamname	total_goals
Croatia	4
Czech Republic	4
Denmark	4
England	5
France	3
Germany	10
Greece	5
Italy	6

10.

Show the stadium and the number of goals scored in each stadium.

```
SELECT ga.stadium, COUNT(g.player) AS total_goals
FROM game AS ga
JOIN goal AS g
ON ga.id = g.matchid
GROUP BY ga.stadium;
```

[Submit SQL](#)[restore default](#)

Correct answer

stadium	total_goals
Arena Lviv	9
Donbass Arena	7
Metalist Stadium	7
National Stadium, Warsaw	9
Olimpiyskiy National Sports Complex	14
PGE Arena Gdansk	13
Stadion Miejski (Poznan)	8
Stadion Miejski (Wroclaw)	9

11.

For every match involving 'POL', show the matchid, date and the number of goals scored.

```
        COUNT(g.player) AS total_goals
FROM game AS ga
LEFT JOIN goal AS g
ON ga.id = g.matchid
WHERE ga.team1 = 'POL' OR ga.team2 = 'POL'
GROUP BY ga.id, ga.mdate;
```

[Submit SQL](#)[restore default](#)

Correct answer

matchid	mdate	total_goals
1001	8 June 2012	2
1004	12 June 2012	2
1005	16 June 2012	1

12.

For every match where 'GER' scored, show matchid, match date and the number of goals scored by 'GER'

```
        COUNT(g.player) AS ger_goals
FROM game AS ga
JOIN goal AS g
ON ga.id = g.matchid
WHERE g.teamid = 'GER'
GROUP BY ga.id, ga.mdate;
```

[Submit SQL](#)[restore default](#)

Correct answer

matchid	mdate	ger_goals
1008	9 June 2012	1
1010	13 June 2012	2
1012	17 June 2012	2
1026	22 June 2012	4
1030	28 June 2012	1

13.

List every match with the goals scored by each team as shown. This will use "CASE WHEN" which has not been explained in any previous exercises.

mdate	team1	score1	team2	score2
1 July 2012	ESP	4	ITA	0
10 June 2012	ESP	1	ITA	1
10 June 2012	IRL	1	CRO	3
...				

Notice in the query given every goal is listed. If it was a team1 goal then a 1 appears in score1, otherwise there is a 0. You could SUM this column to get a count of the goals scored by team1. **Sort your result by mdate, matchid, team1 and team2.**

```
SUM(CASE WHEN g.teamid = ga.team1 THEN 1 ELSE 0 END) AS score1,  
ga.team2,  
SUM(CASE WHEN g.teamid = ga.team2 THEN 1 ELSE 0 END) AS score2  
FROM game AS ga  
LEFT JOIN goal AS g  
ON ga.id = g.matchid  
GROUP BY ga.id, ga.mdate, ga.team1, ga.team2  
ORDER BY ga.mdate, ga.id, ga.team1, ga.team2;
```

[Submit SQL](#)[restore default](#)

Correct answer

mdate	team1	score1	team2	score2
1 July 2012	ESP	4	ITA	0
10 June 2012	ESP	1	ITA	1
10 June 2012	IRL	1	CRO	3
11 June 2012	FRA	1	ENG	1
11 June 2012	UKR	2	SWE	1
12 June 2012	GRE	1	CZE	2
12 June 2012	POL	1	RUS	1
13 June 2012	GER	3	RUS	1

What next?

[JOIN Quiz](#)

[Old JOIN Tutorial](#)

More JOIN operations: The next tutorial about the Movie database involves some slightly more complicated joins from the movie database.

Retrieved from "https://sqlzoo.net/w/index.php?title=The_JOIN_operation&oldid=40104"