EXPERIMENT 1:
DDL Commands using CREATE, ALTER , TRUNCATE and DROP

```
mysql> create table student(studname varchar(20), studid int, course varchar(20));
Query OK, 0 rows affected (0.04 sec)

mysql> desc student;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| studname | varchar(20) | YES  |     | NULL    |       |
| studid   | int         | YES  |     | NULL    |       |
| course   | varchar(20) | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
3 rows in set (0.00 sec)
```

CREATE COMMAND

```
mysql> select * from student;
+-------------+---------+------------+
| studname    | studid  | course     |
+-------------+---------+------------+
| divya       |     101 | cse        |
| keerthi     |     102 | cse aiml   |
| varshini    |     103 | cse IT     |
| pridiksha   |     104 | cse aids   |
| tharani     |     105 | cse        |
+-------------+---------+------------+
5 rows in set (0.00 sec)
```

```
mysql> alter table student add column age int;
Query OK, 0 rows affected (0.04 sec)
Records: 0  Duplicates: 0  Warnings: 0
```

ALTER COMMAND


```
mysql> select * from student
    -> ;
+-----------+--------+-----------+------+
| studname  | studid | course    | age  |
+-----------+--------+-----------+------+
| divya     |    101 | cse       | NULL |
| keerthi   |    102 | cse aiml  | NULL |
| varshini  |    103 | cse IT    | NULL |
| pridiksha |    104 | cse aids  | NULL |
| tharani   |    105 | cse       | NULL |
+-----------+--------+-----------+------+
5 rows in set (0.00 sec)
```

```
mysql> select * from student;
+------------+---------+-----------+-------+
| studname   | studid | course    | age   |
+------------+---------+-----------+-------+
| keerthi    |     102 | cse aiml |    18 |
| varshini   |     103 | cse IT   |    18 |
| pridiksha |     104 | cse aids |    18 |
| tharani    |     105 | cse      |    18 |
+------------+---------+-----------+-------+
4 rows in set (0.00 sec)

mysql> truncate table student;
Query OK, 0 rows affected (0.05 sec)

mysql> select * from student;
Empty set (0.00 sec)
```

TRUNCATE

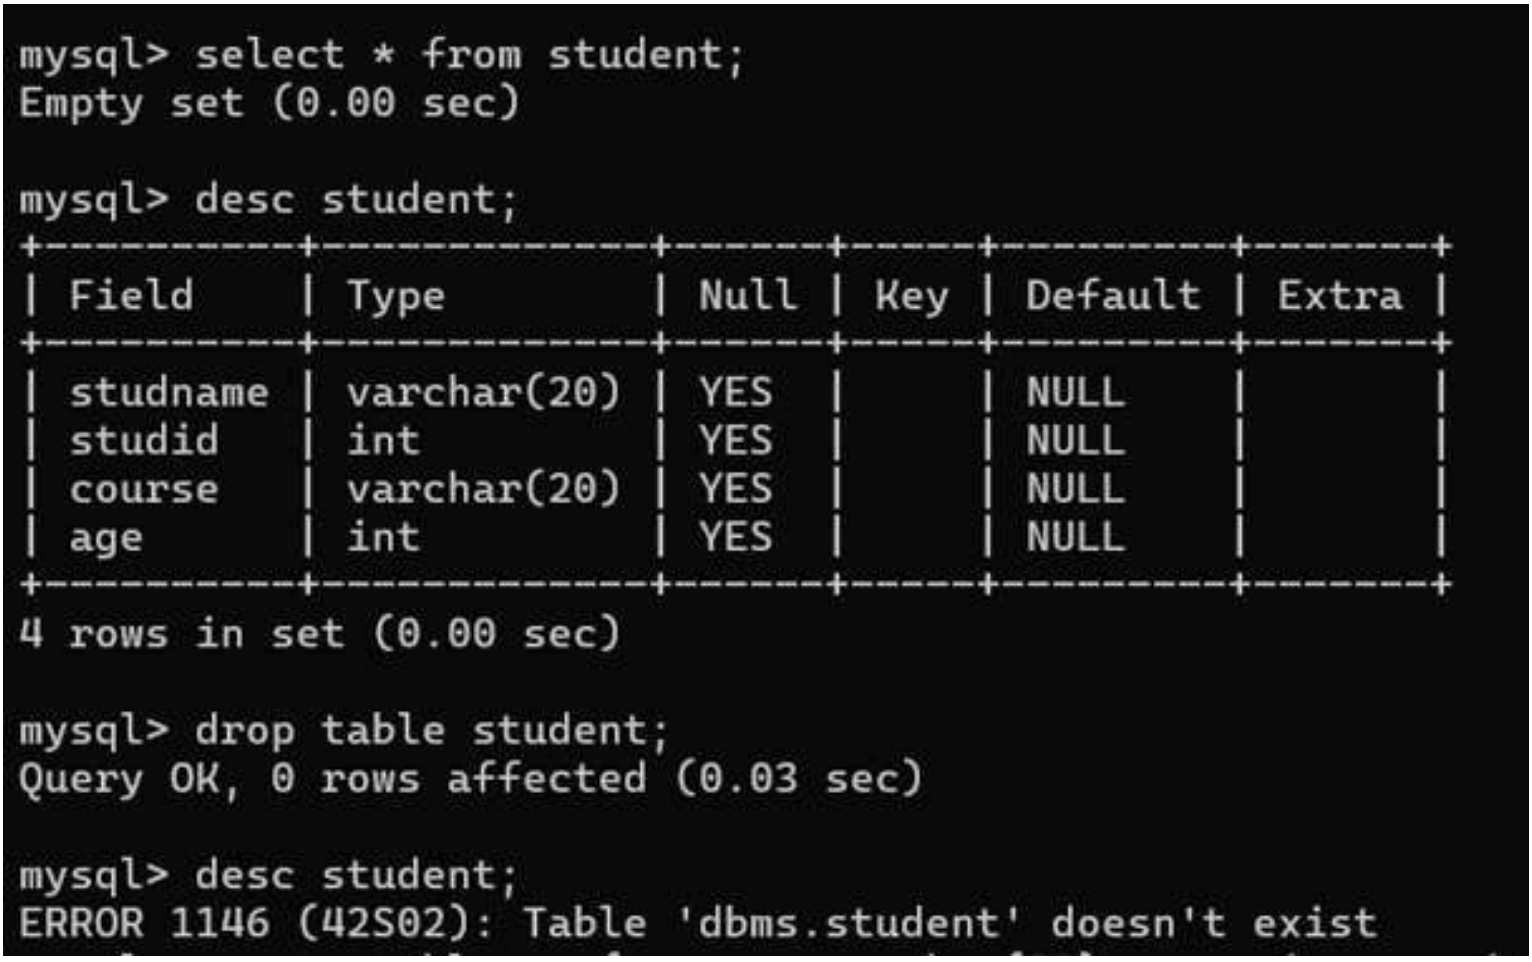

```
mysql> select * from student;
Empty set (0.00 sec)

mysql> desc student;
+----------+-------------+------+-----+---------+-------+
| Field    | Type        | Null | Key | Default | Extra |
+----------+-------------+------+-----+---------+-------+
| studname | varchar(20) | YES  |     | NULL    |       |
| studid   | int         | YES  |     | NULL    |       |
| course   | varchar(20) | YES  |     | NULL    |       |
| age      | int         | YES  |     | NULL    |       |
+----------+-------------+------+-----+---------+-------+
4 rows in set (0.00 sec)

mysql> drop table student;
Query OK, 0 rows affected (0.03 sec)

mysql> desc student;
ERROR 1146 (42S02): Table 'dbms.student' doesn't exist
```

DROP COMMAND