Task5: selected QGF confirmation results

Saved-trace diagnostic - not final research, not a new heldout evaluation

PointMaze navigation, not a robot-arm cube task. Native medium Task5 starts near (20,4) and targets (0,0). The BC flow and Task5 IQL critic remain frozen. M changes inference integration of the F8-trained flow; it is not a particle count.

Frozen trained seed	QGF kappa	Inference slices M	Selected CONF success
11	96	16	40 /40
23	2	64	36 /40
37	80	32	40 /40

Result: 116/120 selected confirmation executions succeed. All four failures occur in seed23; each reaches the 1000-step cap, with final Euclidean goal distance 14.8124-14.9694. All120 records, including the failures, appear in the following figures.


How to read this: Each trained model uses its own selected kappa/M. The same40 reset contexts are paired across models, and these settings were selected on these confirmation data. These are not new100-episode heldout results and do not isolate the effect of kappa or M.

Accounting and limits: 19,410 executed rows; 48,920 proposal rows, of which29,510 inactive rows are excluded. Saved-data diagnostic wall14.908917291s counted once; zero new trials or model/Q/BC/sampler/RNG/native calls. RawQ is a learned min-head target-critic score at visited states/actions. Its qavg field is a rawQ copy; internal drift and BC counterfactual stay NA.

Source commitments: saved auditf8565a4c8eab3347; original-image visual QA79e2cee0a0b72df4; all120 CSVef15cdfe0b110501. Full hashes, all40 reset IDs and exact checkpoint/settings references are in DATA.json and the evidence folder.

All120 selected confirmation paths

Unmodified saved-data figure | Selected CONF only | No new policy or environment evaluation

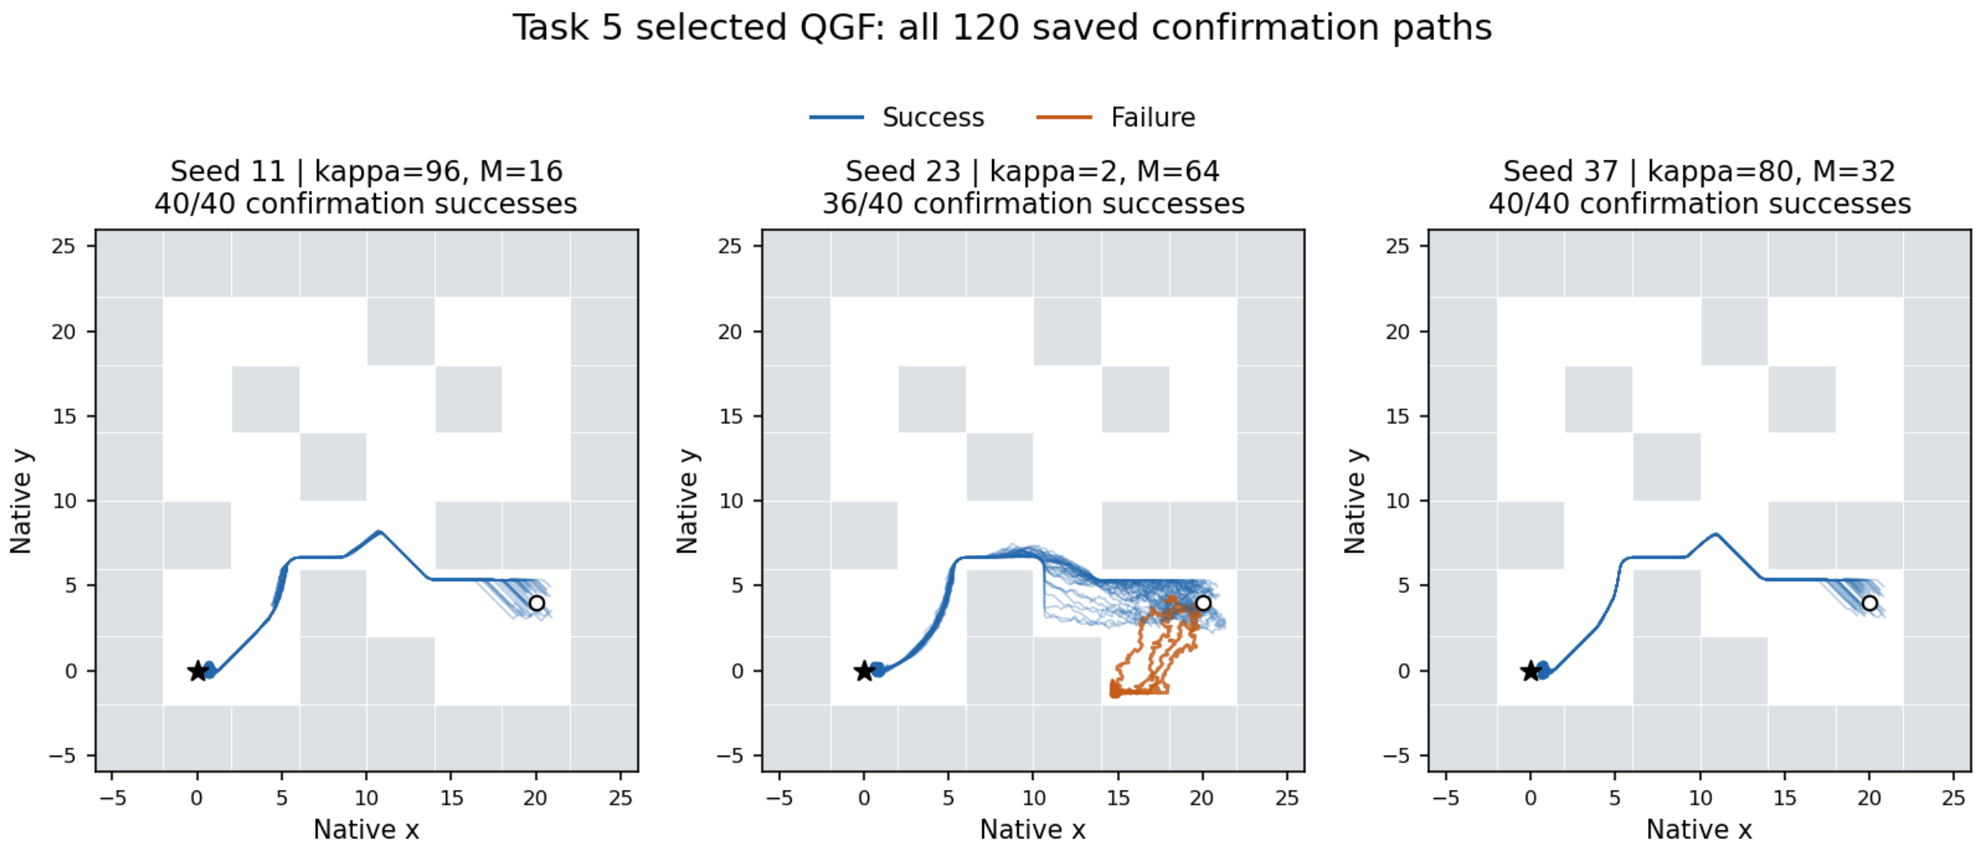


All 40 paired contexts per trained model; zero new trials. Selected on these confirmation data.
Different selected settings and visitation; no true-Q error, causal or unseen-action-support claim.

All40 paths per frozen trained model; original image embedded unchanged. Settings and visitation differ. Successes and all four failures are retained. The figure does not identify a cause or establish unseen-action support.

Action saturation and saved rawQ

Unmodified saved-data figure | Selected CONF only | No new policy or environment evaluation

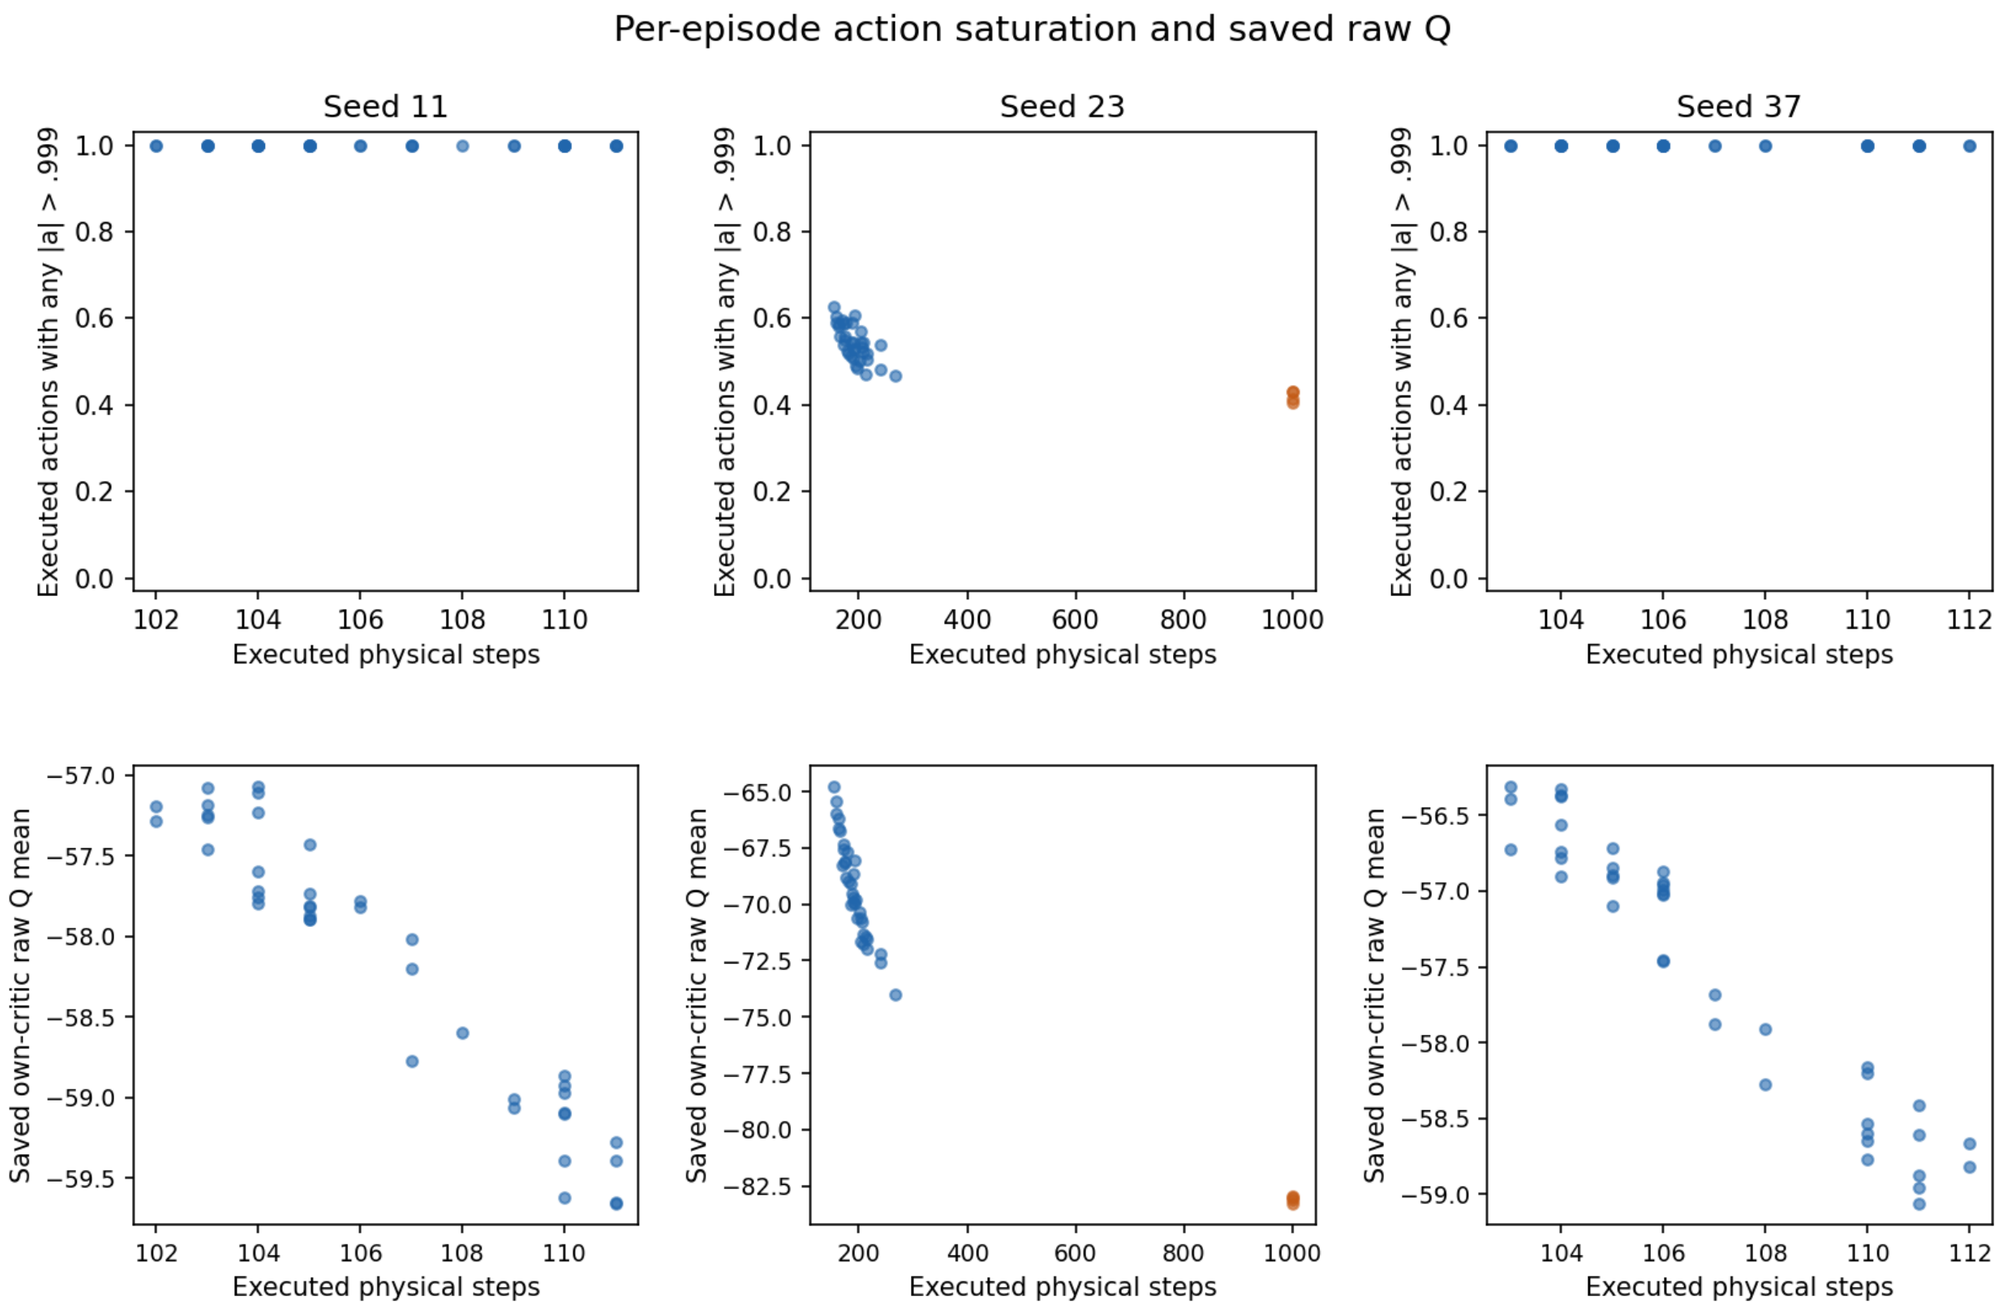


Every selected episode shown. Raw Q is the frozen model score at its own visited (state, chosen action), not return or Q truth.
No cross-model calibration is assumed; final_qavg_q is a copy of raw Q for these raw-QGF traces.

Saturation is the executed-action fraction with any absolute coordinate above.999. RawQ is the own frozen target-critic score at visited state/chosen action, not trueQ or return. No cross-model critic calibration is assumed.

All four seed23 failures

Unmodified saved-data figure | Selected CONF only | No new policy or environment evaluation

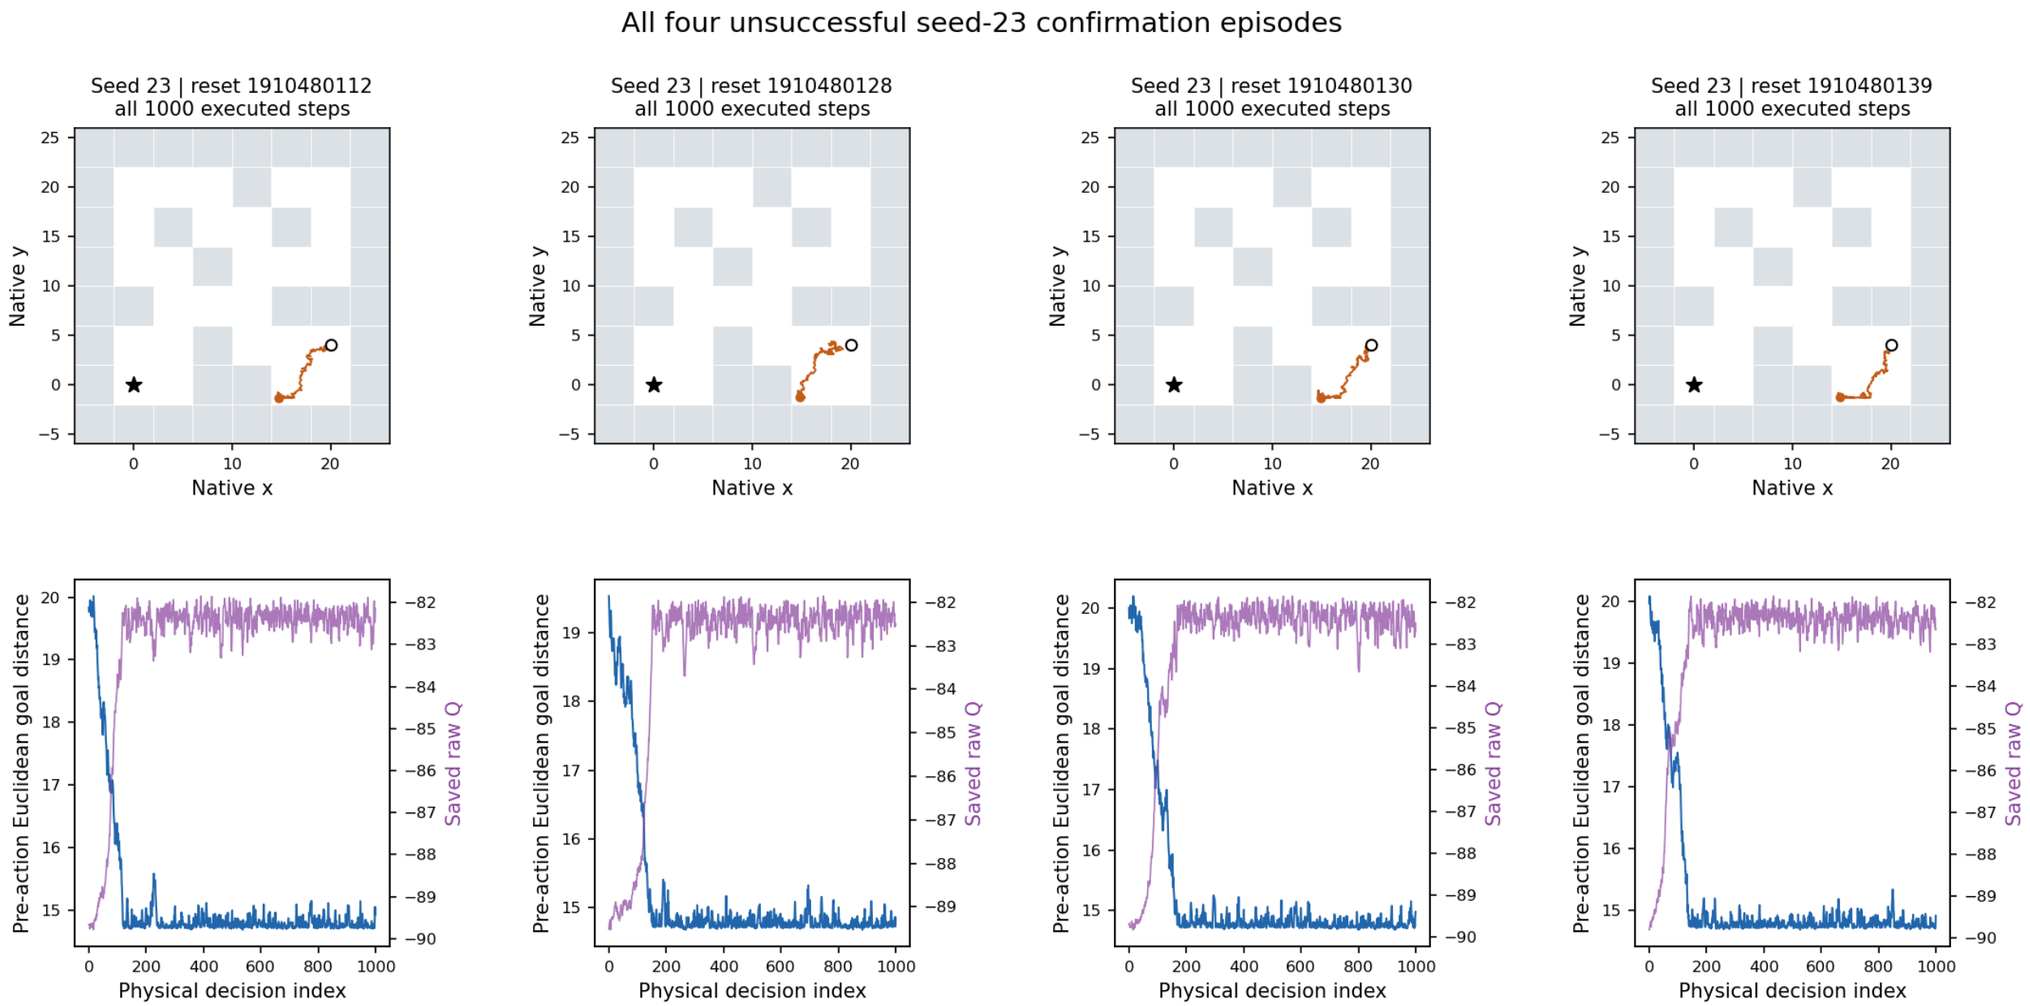

Failures fixed by the saved outcome, with all 36 successes retained in the other plots and tables.
Euclidean distance is not a wall-aware route distance. Q changes mix states and actions; no causal explanation is inferred.

All four unsuccessful episodes last1000 steps with return-1000; final straight-line goal distance14.8124-14.9694. Euclidean distance is not wall-aware route distance. Q changes mix changing states and actions; they do not prove a Q-error cause.