Task5: selected QGF confirmation results

Saved-trace diagnostic - not final research, not a new heldout evaluation

These results are PointMaze navigation. The paper CubeTripleTask3 and CubeQuadruple tasks have not yet been tested with the eight DF conditions here. Native medium Task5 starts near (20,4) and targets (0,0). BC flow and Task5 IQL critic remain frozen. M changes inference integration of the F8-trained flow; it is not a particle count.

Frozen trained seed	QGF kappa	Inference slices M	Selected CONF success
11	96	16	40 /40
23	2	64	36 /40
37	80	32	40 /40

Result: 116/120 selected confirmation executions succeed. All four failures occur in seed 23; each reaches the 1000-step cap, with final Euclidean goal distance 14.8124-14.9694. All 120 records, including the failures, appear in the following figures.


How to read this: Each trained model uses its own selected kappa/M. The same40 reset contexts are paired across models, and these settings were selected on these confirmation data. These are not new100-episode heldout results and do not isolate the effect of kappa or M.

Accounting and limits: 19,410 executed rows; 48,920 proposal rows, of which 29,510 inactive rows are excluded. Saved-data diagnostic wall 14.908917291s counted once; zero new trials or model/Q/BC/sampler/RNG/native calls. RawQ is a learned min-head target-critic score at visited states/actions. Its qavg field is a rawQ copy; internal drift and BC counterfactual stay NA.

Source commitments: saved auditf8565a4c8eab3347; original-image visual QA79e2cee0a0b72df4; all 120 CSVef15cdfe0b110501. Full hashes, all 40 reset IDs and exact checkpoint/settings references are in DATA.json and the evidence folder.

All 120 selected confirmation paths

Unmodified saved-data figure | Selected CONF only | No new policy or environment evaluation

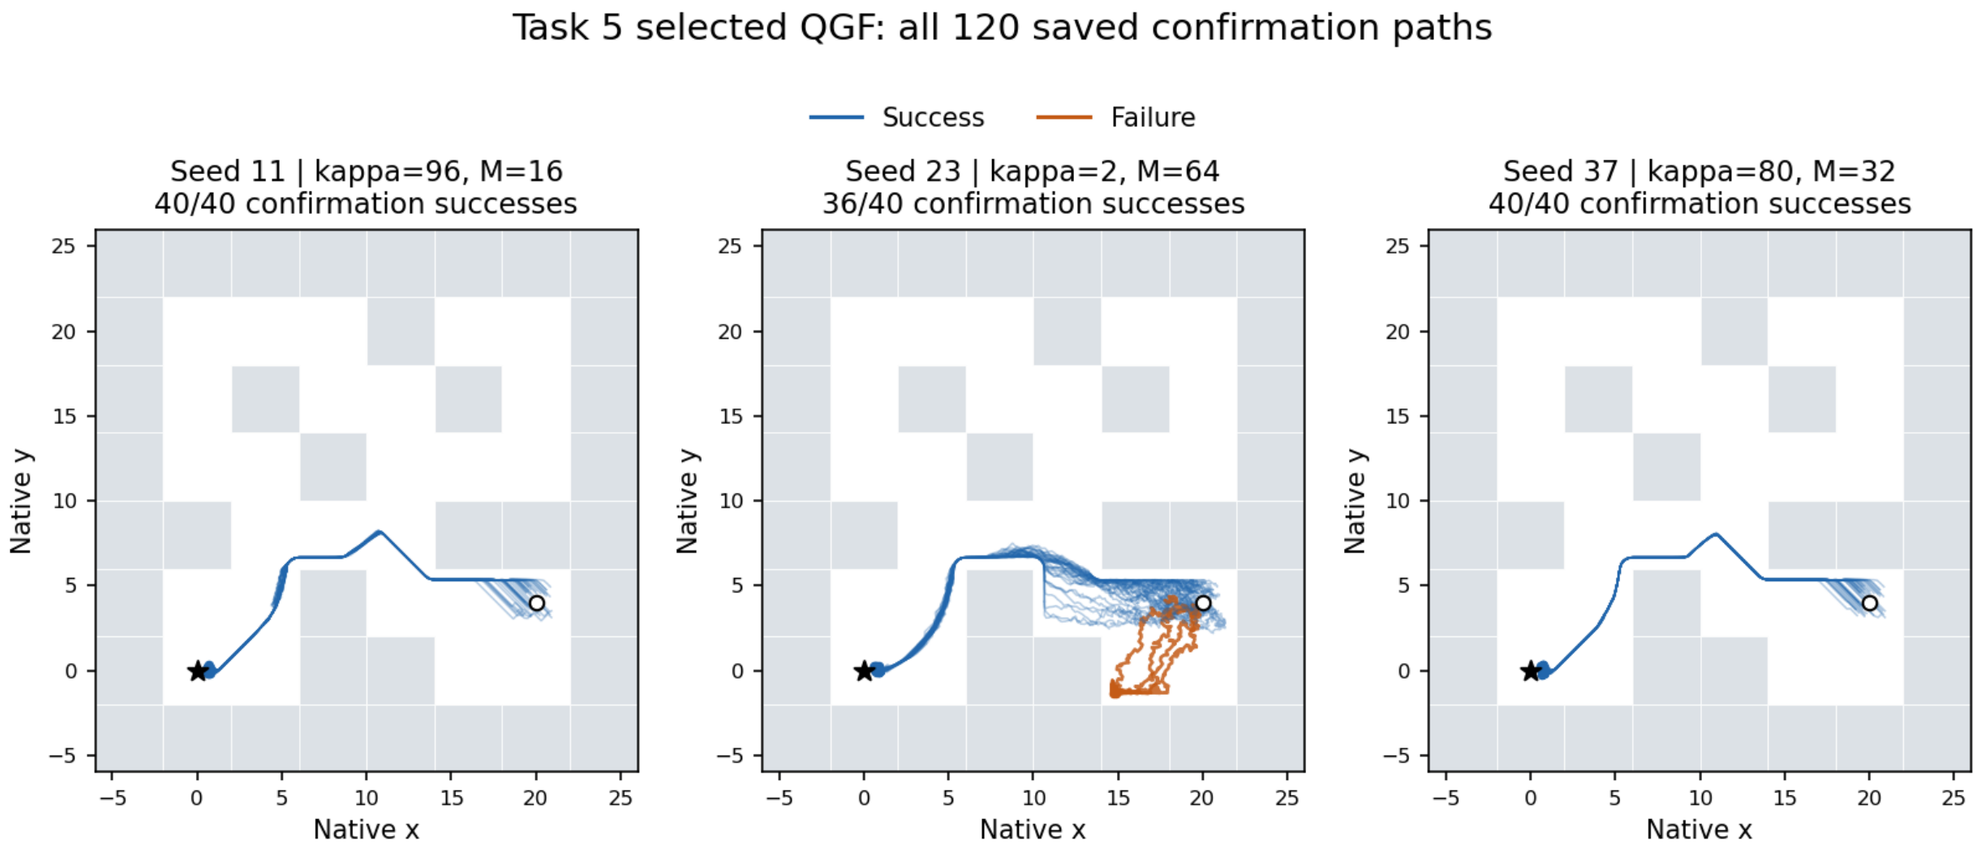


All 40 paired contexts per trained model; zero new trials. Selected on these confirmation data.
Different selected settings and visitation; no true-Q error, causal or unseen-action-support claim.

All 40 paths per frozen trained model; original image embedded unchanged. Settings and visitation differ. Successes and all four failures are retained. The figure does not identify a cause or establish unseen-action support.

Action saturation and saved rawQ

Unmodified saved-data figure | Selected CONF only | No new policy or environment evaluation

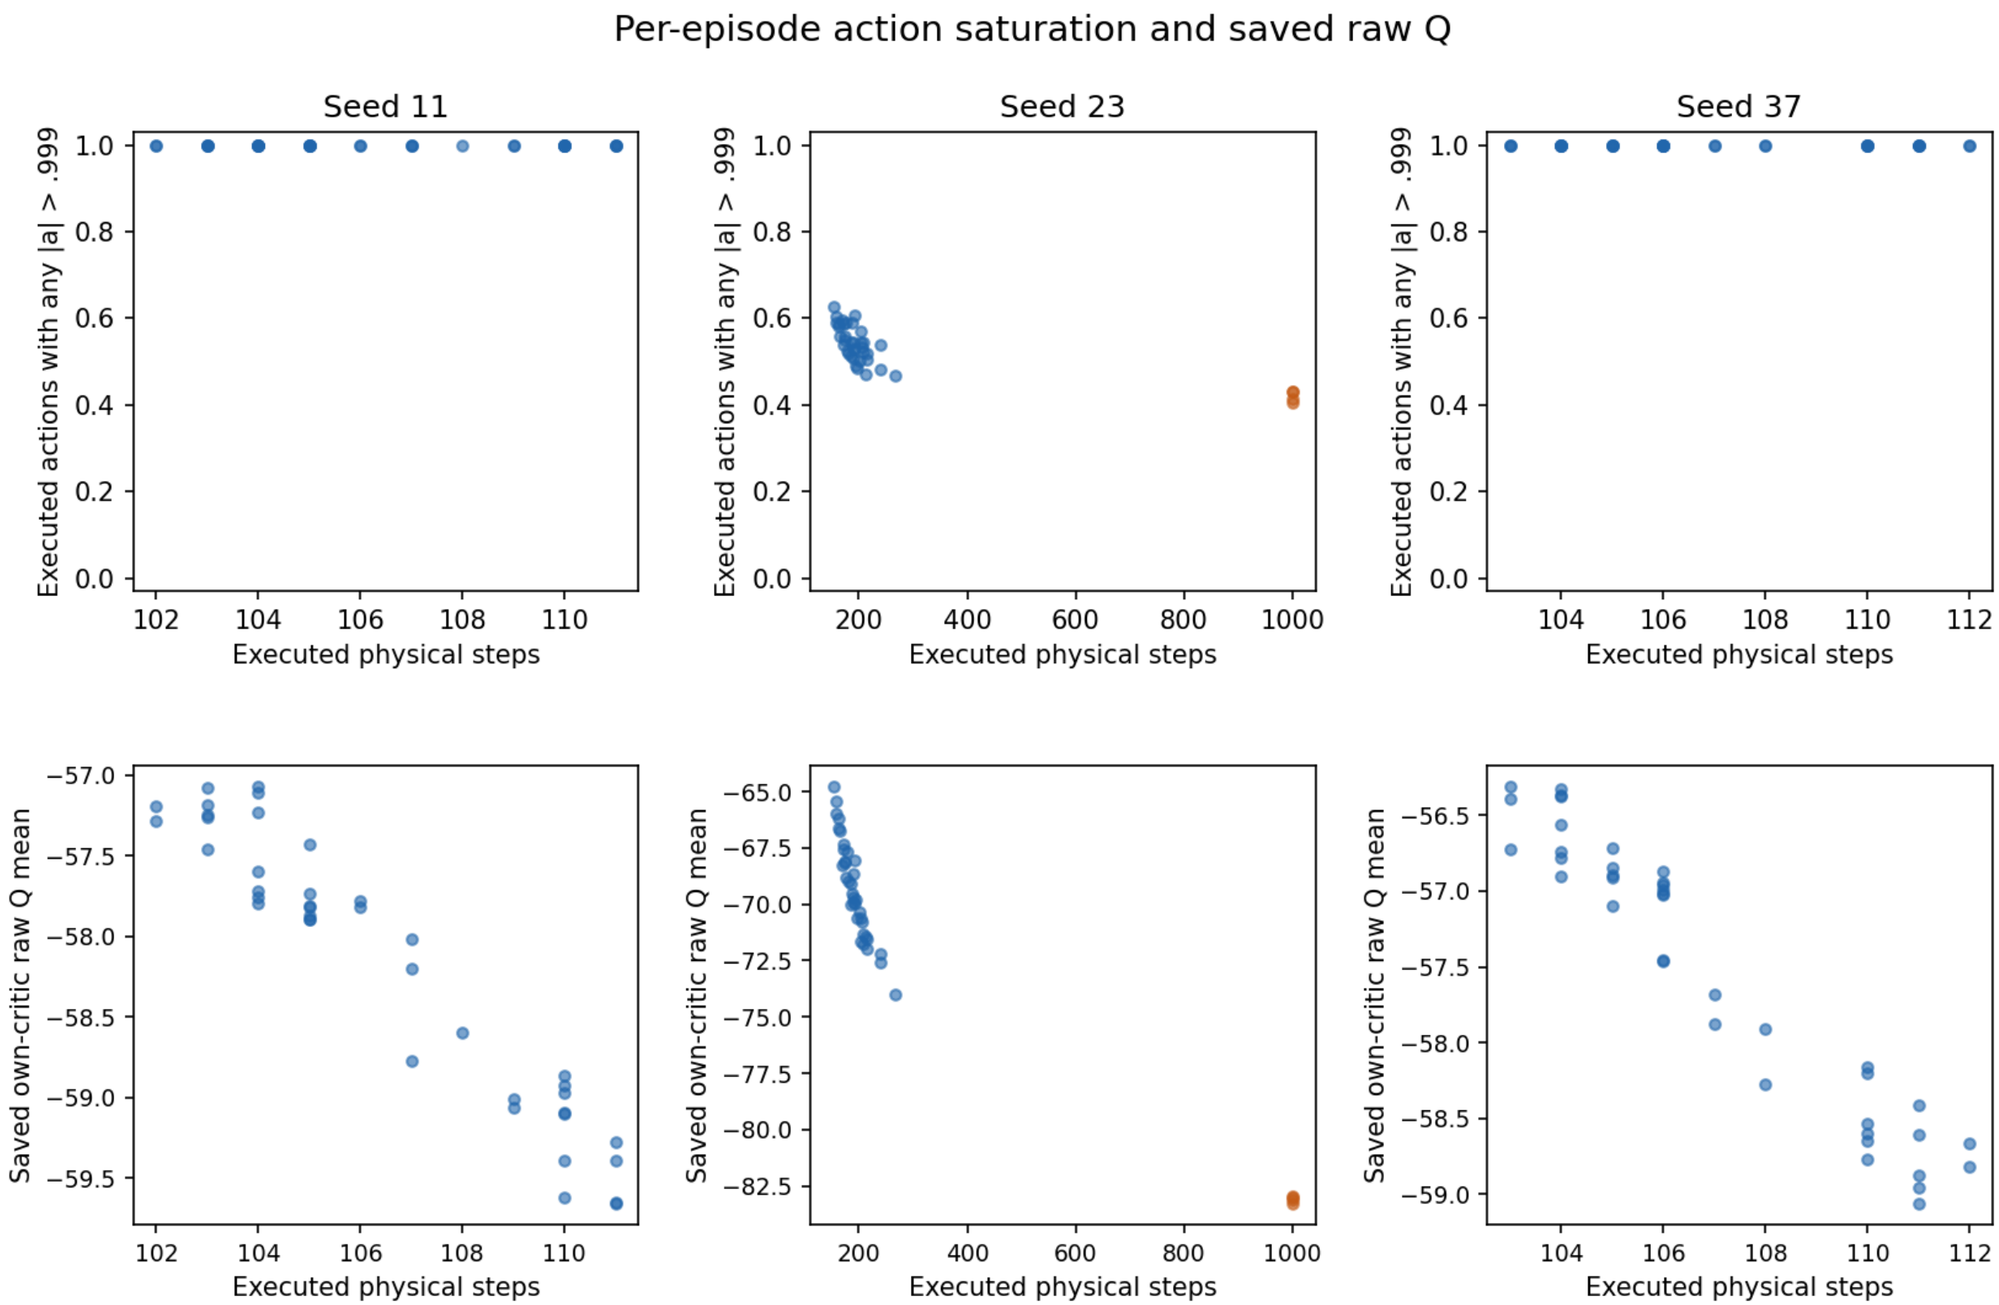


Every selected episode shown. Raw Q is the frozen model score at its own visited (state, chosen action), not return or Q truth.
No cross-model calibration is assumed; final_qavg_q is a copy of raw Q for these raw-QGF traces.

Saturation is the executed-action fraction with any absolute coordinate above .999. RawQ is the own frozen target-critic score at visited state/chosen action, not trueQ or return. No cross-model critic calibration is assumed.

All four seed 23 failures

Unmodified saved-data figure | Selected CONF only | No new policy or environment evaluation

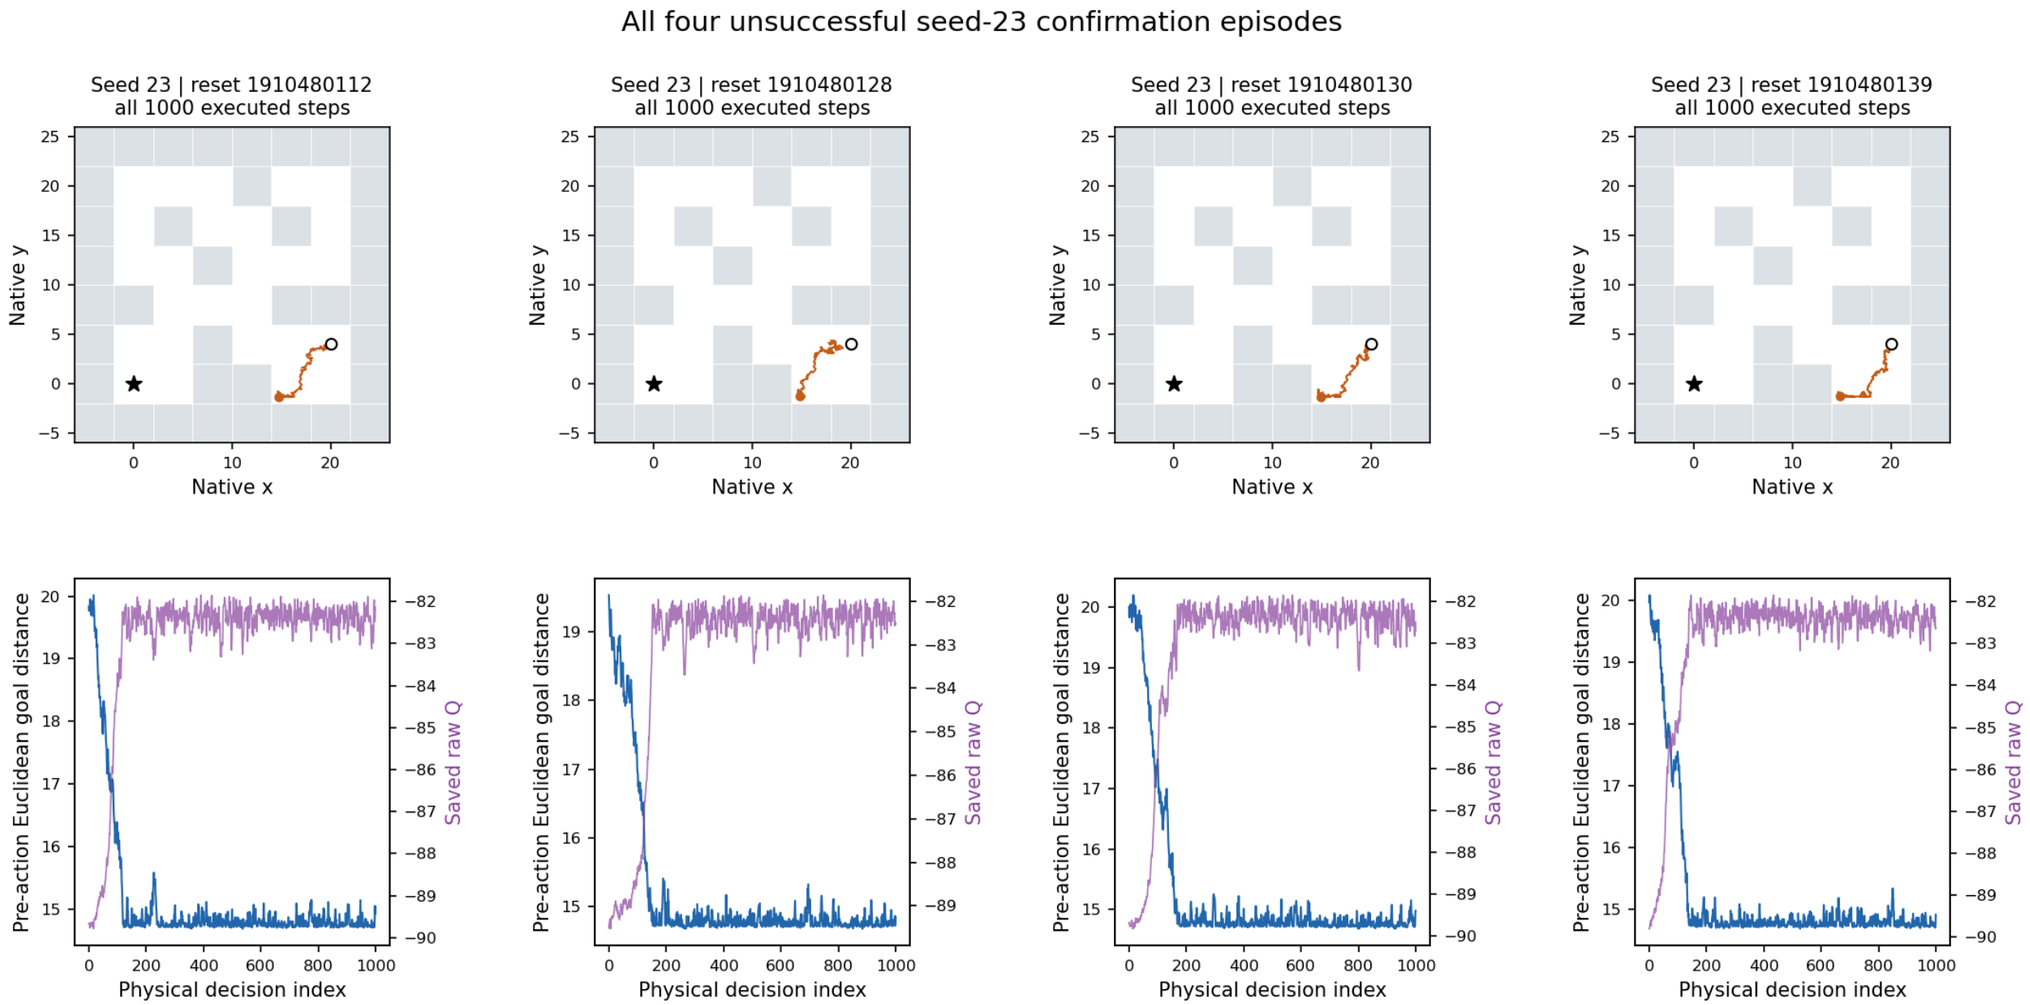

Failures fixed by the saved outcome, with all 36 successes retained in the other plots and tables.
Euclidean distance is not a wall-aware route distance. Q changes mix states and actions; no causal explanation is inferred.

All four unsuccessful episodes last 1000 steps with return -1000; final straight-line goal distance 14.8124-14.9694. Euclidean distance is not wall-aware route distance. Q changes mix changing states and actions; they do not prove a Q-error cause.