Q11	**W.A.P That Set background-image using jquery CSS property.**

Ans.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Q11</title>
    <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-
/JqT3SQfawRcv/BIHPThkBvs0OEvtFFmqPF/lYI/Cxo=" crossorigin="anonymous"></script>
    <script>
      $(document).ready(function(){
        $("body").css("background-image","url('pic.jpg')");
      });
    </script>
  </head>
  <body>
  </body>
</html>
```

**********OUTPUT**********

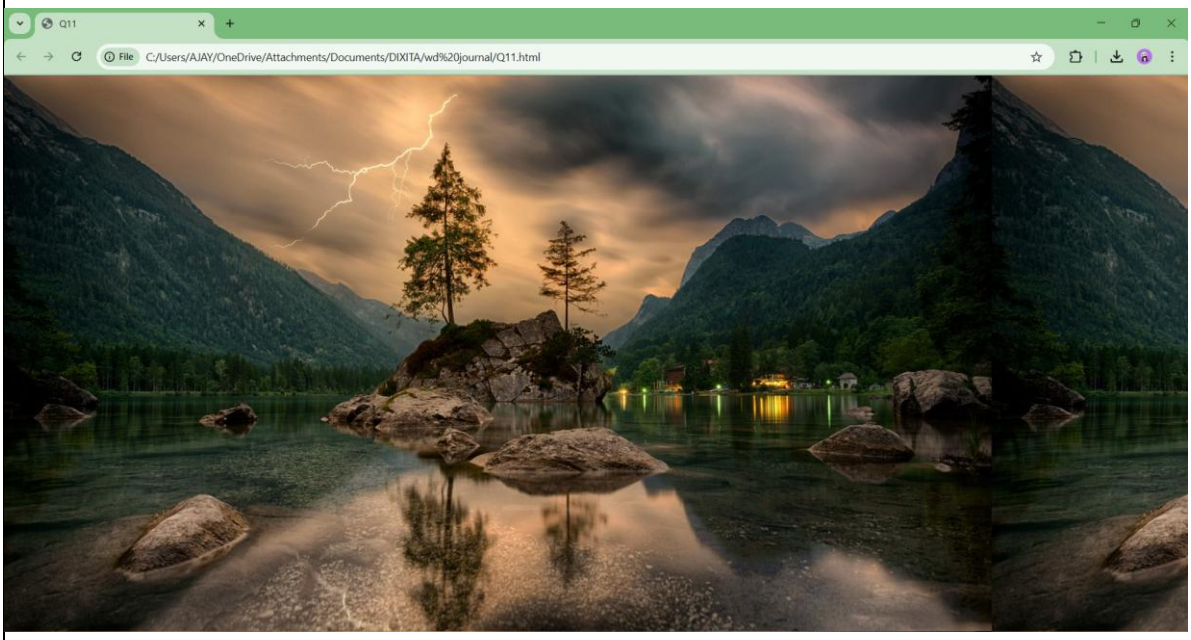

Q12	W.A.P That Delete all table rows except first one using jquery.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Q12</title>
    <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-
/JqT3SQfawRcv/BIHPThkBvs0OEvtFFmqPF/lYI/Cxo=" crossorigin="anonymous"></script>
    <script>
      $(document).ready(function(){
        $("button").click(function(){
          $("table tr:not(:first)").remove();
        });
      });
    </script>
  </head>
  <body>
    <table border="2">
      <tr>
        <th>S No.</th>
        <th>Name</th>
        <th>Age</th>
      </tr>
      <tr>
        <td>01</td>
        <td>Dixita</td>
        <td>20</td>
      </tr>
      <tr>
        <td>02</td>
        <td>Komal</td>
        <td>20</td>
      </tr>
      <tr>
        <td>03</td>
        <td>Shruti</td>
        <td>19</td>
      </tr>
      <tr>
        <td>04</td>
        <td>Nakul</td>
        <td>21</td>
      </tr>
      <tr>
        <td>04</td>
        <td>Payal</td>
        <td>18</td>
      </tr>
    </table><br>
  <button type="button">Remove Rows</button>
  </body>
</html>
```

**********OUTPUT**********

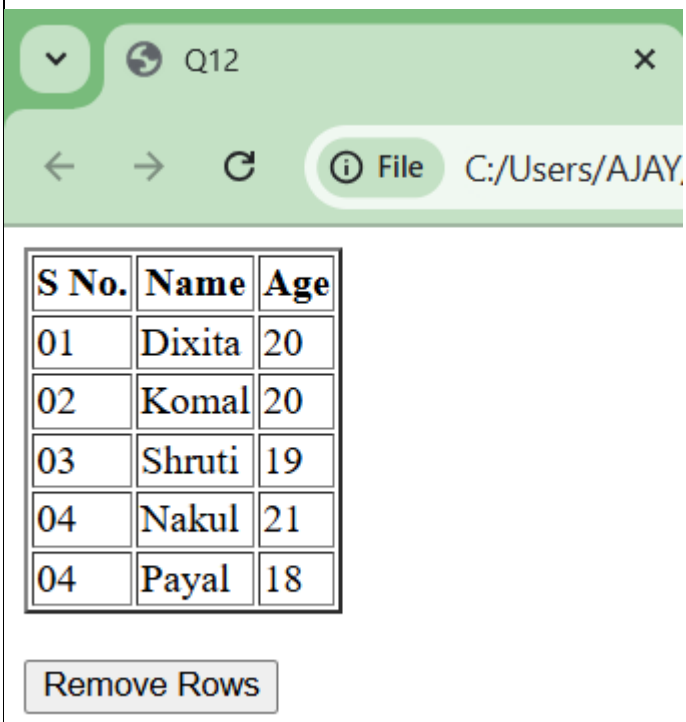
Q12
File
C:/Users/AJAY/
S No.
Name
Age
01
Dixita
20
02
Komal
20
03
Shruti
19
04
Nakul
21
04
Payal
18
Remove Rows

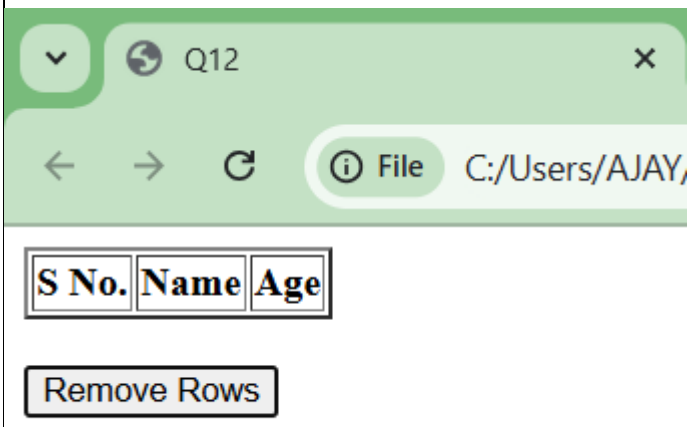
Q12
File
C:/Users/AJAY/
S No.
Name
Age
Remove Rows

Q13 W.A.P That How to get the selected value and currently selected text of a dropdown box using jquery?

```
<!DOCTYPE html>
<html>
  <head>
    <title>Q13</title>
    <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-
/JqT3SQfawRcv/BIHPThkBvs0OEvtFFmqPF/lYI/Cxo=" crossorigin="anonymous"></script>
    <script>
      $(document).ready(function(){
        $("select").change(function(){
          var value = $(this).val();
          var text = $("select option:selected").text();
          $("div").html("Selected Value: " + value + "<br> Selected Text: " + text);
        });
      });

    </script>
  </head>
  <body>
    <select>
      <option value="b">Black</option>
      <option value="w">White</option>
      <option value="p">Pink</option>
      <option value="y">Yellow</option>
    </select><br><br>
    <div></div>
  </body>
</html>
```

**********OUTPUT**********

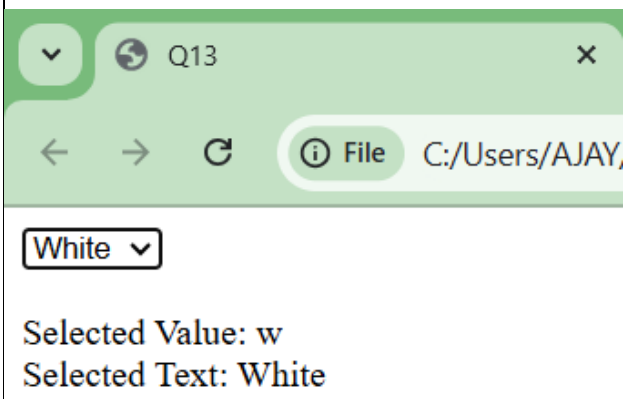

Q14 W.A.P that fetch data from XML file and display it's content on HTML file.

```
<!DOCTYPE html>
<html>
  <head>
    <title>Q14</title>
  </head>
  <body>
    <div>
      <h2>Employee Details : </h2>
      <b>Name : </b><span id="name"></span>
      <b>Position : </b><span id="position"></span>
      <b>Salary : </b><span id="salary"></span>
    </div>
    <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-
/JqT3SQfawRcv/BIHPThkBvs0OEvtFFmqPF/lYI/Cxo=" crossorigin="anonymous"></script>
    <script>
      $(document).ready(function(){
        xmlhttp=new XMLHttpRequest();
        xmlhttp.open("GET","data.xml",false);
        xmlhttp.send();
        xmlDoc=xmlhttp.responseXML;

        document.getElementById("name").innerHTML=xmlDoc.getElementsByTagName("
name")[0].childNodes[0].nodeValue;
        document.getElementById("position").innerHTML=xmlDoc.getElementsByTagNam
e("position")[0].childNodes[0].nodeValue;
        document.getElementById("salary").innerHTML=xmlDoc.getElementsByTagName(
"salary")[0].childNodes[0].nodeValue;
      });
    </script>
  </body>
</html>
```

**********OUTPUT**********

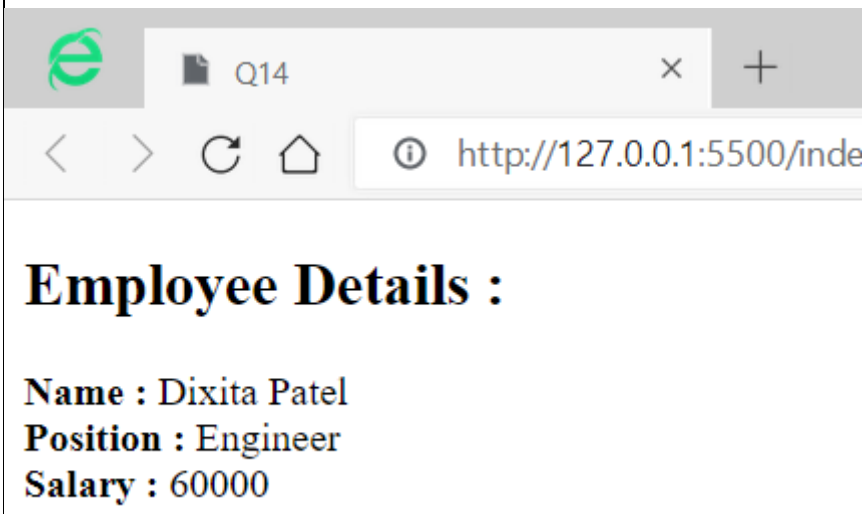

Q15 W.A.P that parse XML string into DOM.

```
<!DOCTYPE html>
<html>
   <head>
      <title>Q15</title>
      <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-
/JqT3SQfawRcv/BIHPThkBvs0OEvtFFmqPF/lYI/Cxo=" crossorigin="anonymous"></script>
   </head>
   <body>
      <h2>Personal Details : </h2>
      <b>Name : </b><span id="name"></span><br>
      <b>Age : </b><span id="age"></span><br>
      <b>City : </b><span id="city"></span>
      <script>
         var text,parser,xmlDoc;
         text="<personal-details><person>"+
            "<name>Dixita Patel</name>"+
            "<age>20</age>"+
            "<city>Navsari</city>"+
            "</person></personal-details>";

         parser= new DOMParser();
         xmlDoc= parser.parseFromString(text,"text/xml");

         document.getElementById("name").innerHTML=xmlDoc.getElementsByTagName("na
me")[0].childNodes[0].nodeValue;
         document.getElementById("age").innerHTML=xmlDoc.getElementsByTagName("age"
)[0].childNodes[0].nodeValue;
         document.getElementById("city").innerHTML=xmlDoc.getElementsByTagName("city
")[0].childNodes[0].nodeValue;
      </script>
   </body>
</html>
```

**********OUTPUT**********

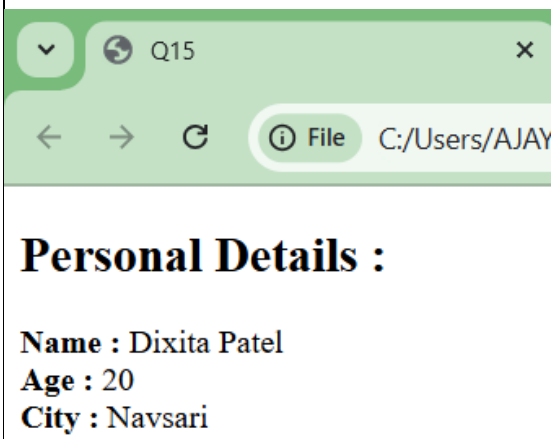

Q16 W.A.P that fetch data from JSON FILE in TABLE.

```
<!DOCTYPE html>
<head>
   <title>Q16</title>
   <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-
/JqT3SQfawRcv/BIHPThkBvs0OEvtFFmqPF/lYI/Cxo=" crossorigin="anonymous"></script>
</head>
<body>
   <h2>Employee Data</h2>
   <table border="2">
         <tr>
            <th>Name</th>
            <th>Position</th>
            <th>Salary</th>
         </tr>
   </table>
   <script>
      $(document).ready(function(){
         $.getJSON("Q16.json", function(data) {
            let tableContent = "";
            $.each(data.employees, function(key, value){
               tableContent += `<tr>
                  <td>${value.name}</td>
                  <td>${value.position}</td>
                  <td>${value.salary}</td>
               </tr>`;
            });
            $("table").append(tableContent);
         });
      });
   </script>

</body>
</html>
```

**********OUTPUT**********

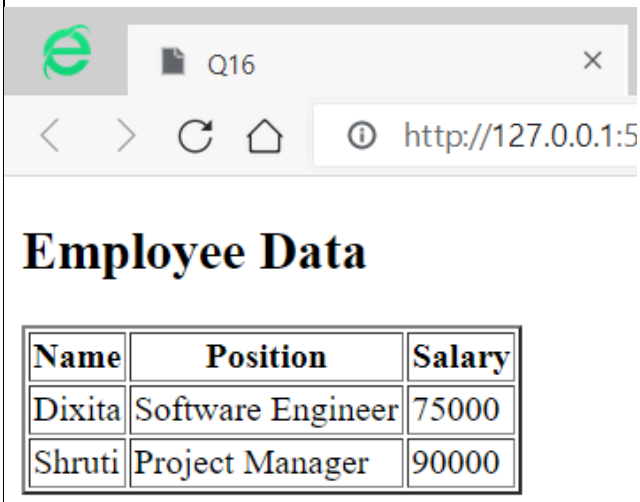

Q17	W.A.P that print message on console using NODE.JS.

console.log("Hello, Welcome to Node.js Programming!");

**********OUTPUT**********

```
C:\Windows\System32\cmd.e

Microsoft Windows [Version 10.0.26100.3037]
(c) Microsoft Corporation. All rights reserved.

C:\Users\AJAY\OneDrive\Attachments\Documents\DIXITA\wd journal>node msg.js
Hello, Welcome to Node.js Programming!
```

Q18 W.A.P that perform following function of FILE SYSTEM :
1. Read file
2. Create a new File
3. Append data in file
4. Rename file
5. Delete file

```
const fs = require('fs');
const fileName = 'myFile.txt';
const newFileName = 'newFile.txt';

fs.writeFile(fileName, 'Hello, My Name Is Dixita.', (err) => {
  if (err) throw err;
  console.log('File created successfully.');

  fs.readFile(fileName, 'utf8', (err, data) => {
    if (err) throw err;
    console.log('File Content:', data);

    fs.appendFile(fileName, 'I live in Navsari.', (err) => {
      if (err) throw err;
      console.log('Data Appended Successfully');

      fs.readFile(fileName, 'utf8', (err, data) => {
        if (err) throw err;
        console.log('File Content After Appending :', data);

        fs.rename(fileName, newFileName, (err) => {
          if (err) throw err;
          console.log('File renamed successfully.');

          fs.unlink(newFileName, (err) => {
            if (err) throw err;
            console.log('File deleted successfully.');
          });
        });
      });
    });
  });
});
```

**********OUTPUT**********

```
C:\Windows\System32\cmd.e

Microsoft Windows [Version 10.0.26100.3037]
(c) Microsoft Corporation. All rights reserved.

C:\Users\AJAY\OneDrive\Attachments\Documents\DIXITA\wd journal>node Q18.js
File created successfully.
File Content: Hello, My Name Is Dixita.
Data Appended Successfully
File Content After Appending : Hello, My Name Is Dixita.I live in Navsari.
File renamed successfully.
File deleted successfully.
```

Q19 W.A.P which fetch query string from URL using NODE.JS.

```
const http = require('http');
const url = require('url');

const server = http.createServer((req, res) => {
   res.writeHead(200, { 'Content-Type': 'text/html' });

   const queryObject = url.parse(req.url, true).query;

   res.write("<h2>Query String </h2>");
   res.write("<ul>");
   for (let key in queryObject) {
      res.write(`<li><b>${key}:</b> ${queryObject[key]}</li>`);
   }
   res.write("</ul>");

   res.end();
});

server.listen(3000, () => {
   console.log("Server is running at http://localhost:3000");
});
```
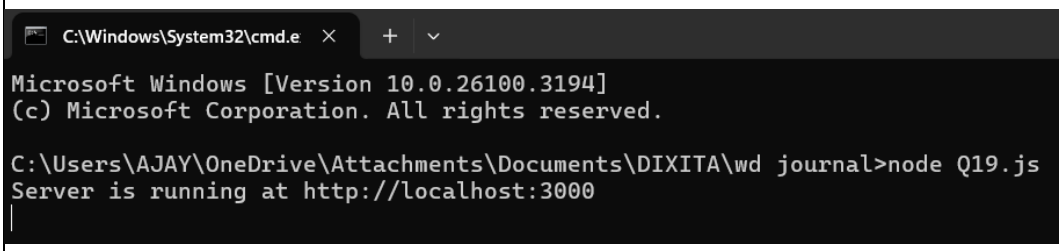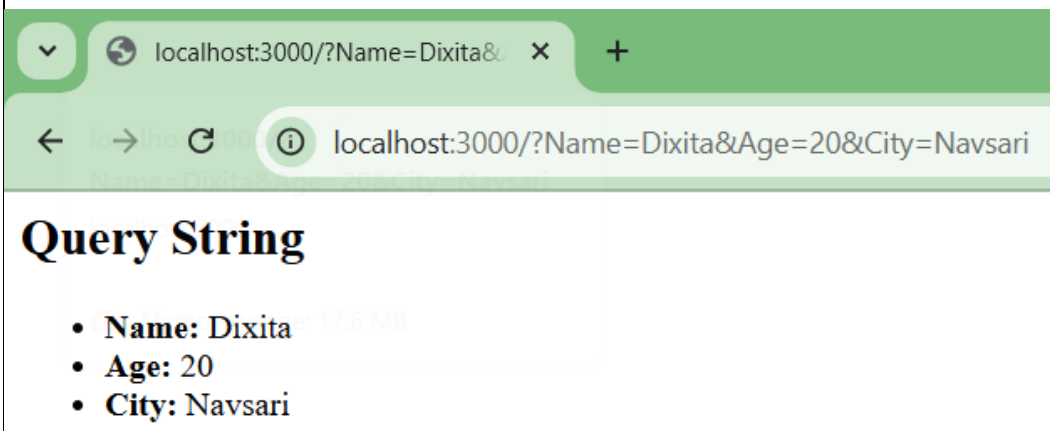
**********OUTPUT**********