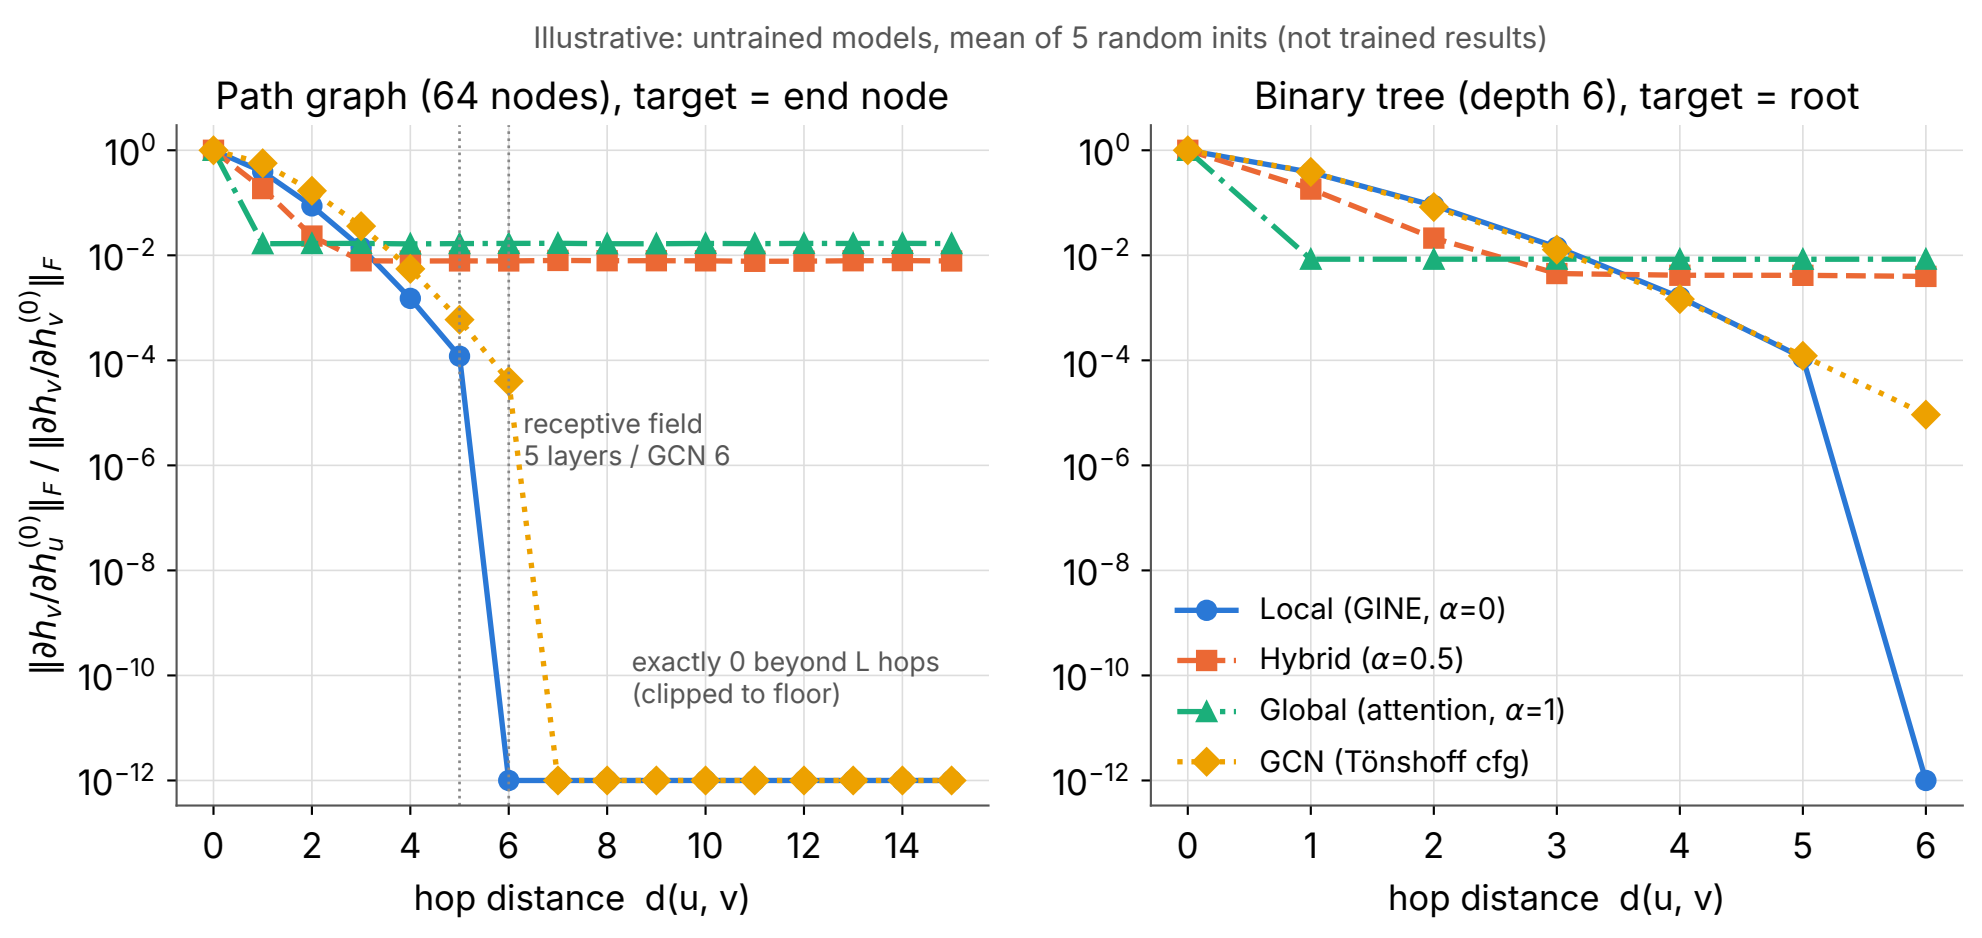
Illustrative: untrained models, mean of 5 random inits (not trained results)
Path graph (64 nodes), target = end node
Binary tree (depth 6), target = root
$\|\partial h_v/\partial h_u^{(0)}\|_F$ / $\|\partial h_v/\partial h_v^{(0)}\|_F$
receptive field
5 layers / GCN 6
exactly 0 beyond L hops
(clipped to floor)
Local (GINE, α=0)
Hybrid (α=0.5)
Global (attention, α=1)
GCN (Tönshoff cfg)
hop distance d(u, v)
hop distance d(u, v)