
```
<ui:container xmlns:ui="http://odklr.ru/ui/1.0">
    <ui:if test="${isUserLoggedIn}">
        <!-- Залогинен -->
        <div class="some-class">
            <a href="${url}" class="link-class">
                Hello world!
            </a>
        </div>
    </ui:if>
    <ui:not test="${isUserLoggedIn}">
        <!-- не залогинен -->
        <div>
            Please log in!
        </div>
    </ui:not>
</ui:container>
```

```
<!-- Залогинен -->
<div class="some-class">
    <a href="url" class="link-class">
       Hello world!
    </a>
</div>
<!-- не залогинен -->
<div>
   Please log in!
</div>
```

```
public IRenderComponent getContent() {
    return new IfCondition<AppRequestCtx>(
            ctx -> ctx.isUserLoggedIn(),
            new DDiv(
                    new DClassAttr("some-class"),
                    new DLink<AppRequestCtx>(
                             link: "url",
                            new DClassAttr("link-class"),
                            new DText("Hello world!")
            new DDiv(
                    new DText("Please log in!")
```

```
define([
   //...
], function(
   //...
    var ShortcutMenu = function(hookId){
        //...
    };
    ShortcutMenu.prototype = {
        activate: function(element) {
            // Add all event listeners
        },
        deactivate: function() { //
            // remove all event listeners
        }
    };
    return ShortcutMenu;
```

<div class="h-mod sc-menu\_w" data-module="ShortcutMenu" data-url="..."></div>

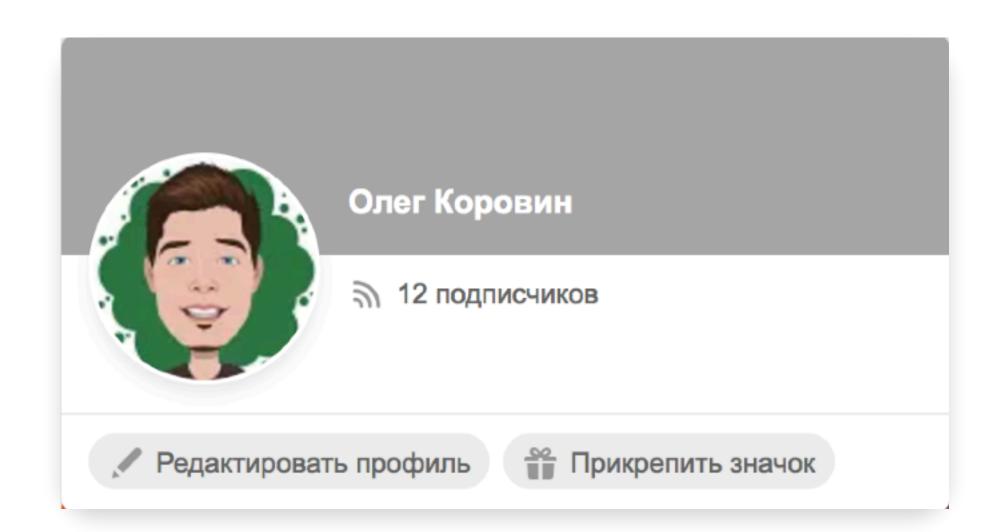

```
define([
   //...
], function(
   //...
    var ShortcutMenu = function(hookId){
        //...
    };
    ShortcutMenu.prototype = {
        activate: function(element) {
            // Add all event listeners
        },
        deactivate: function() { //
            // remove all event listeners
        }
    };
    return ShortcutMenu;
```