

CSC 211: Computer Programming

Introducing loops (for)

Michael Conti


Department of Computer Science and Statistics
University of Rhode Island

Fall 2021



Original design and development by Dr. Marco Alvarez

Basic building blocks

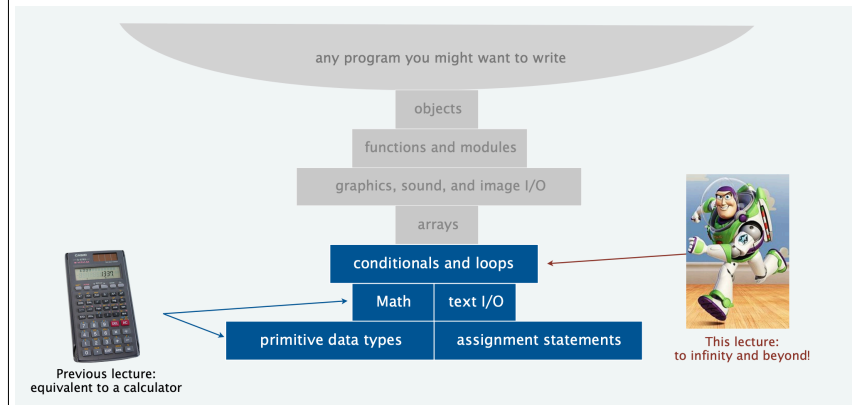

<https://introcs.cs.princeton.edu/java/lectures/>

2

Flowchart of if statements

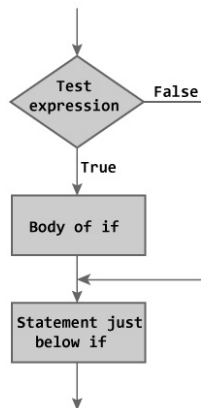


Figure: Flowchart of if Statement

```
// ...  
// statements above  
// ...  
  
if (test_expression) {  
    // body of if  
}  
  
// ...  
// statements below  
// ...
```

<https://www.programiz.com/cpp-programming/if-else>

3

Flowchart of if statements

```
// ...  
// statements above  
// ...  
  
if (test_expression) {  
    // body of if  
} else {  
    // body of else  
}  
  
// ...  
// statements below  
// ...
```

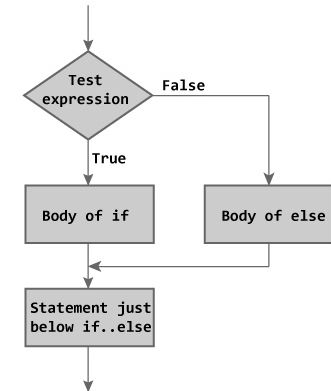


Figure: Flowchart of if...else Statement

<https://www.programiz.com/cpp-programming/if-else>

4

if statement examples

Example: `if (x < 0) x = -x;`

<https://introcs.cs.princeton.edu/java/lectures/>

5

if statement examples

Example: `if (x > y) max = x;
else max = y;`

<https://introcs.cs.princeton.edu/java/lectures/>

6

The increment/decrement operators

- Increment (`++`) and decrement (`--`) are **unary** operators that add or subtract one, to or from their operand, respectively
 - pre-increment** and **pre-decrement** operators increment (or decrement) their operand by 1, and the value of the expression is the resulting incremented (or decremented) value
 - post-increment** and **post-decrement** operators increase (or decrease) the value of their operand by 1, but the value of the expression is the operand's original value prior to the increment (or decrement) operation

- Example:

`5 + ++a`

`5 + a++`

from: wikipedia

7

Trace the code

```
int x;  
int y;
```

```
// increment operators
```

```
x = 1;  
y = ++x;  
y = x++;
```

```
// decrement operators
```

```
x = 3;  
y = x--;  
y = --x;
```

from: wikipedia

8

the for loop

Flowchart of for statement

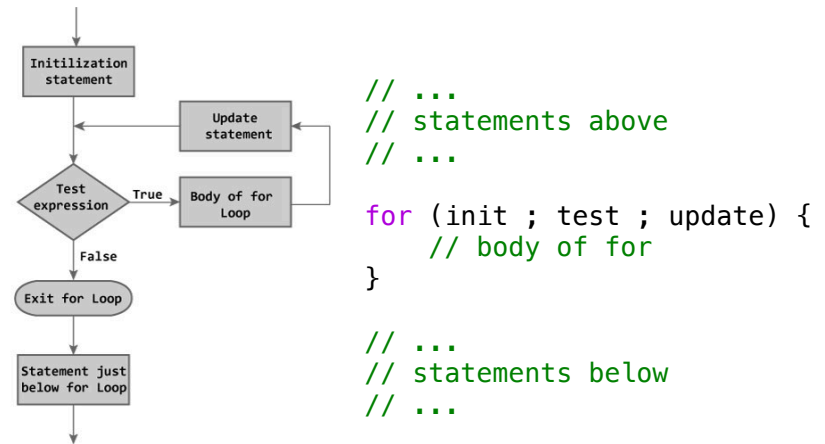


Figure: Flowchart of for Loop

<https://www.programiz.com/cpp-programming/for-loop>

10

1. initialization

4. update

2. boolean

```
for (int i = 0 ; i < 3 ; i++) {  
    std::cout << i << ' ' ;  
}
```

3. statement

then go back to step 2

11

A for Statement

//Illustrates a for loop.

```
#include <iostream>  
using namespace std;
```

```
int main()  
{
```

```
    int sum = 0;
```

```
    for (int n = 1; n <= 10; n++) {  
        sum = sum + n;
```

```
        cout << "The sum of the numbers 1 to 10 is "  
            << sum << endl;
```

```
        return 0;
```

```
    }
```

Output

The sum of the numbers 1 to 10 is 55

from: Problem Solving with C++, 10th Edition, Walter Savitch

12

What is the output?

```
int value = 0;

for (int i = 0 ; i < 5 ; i++) {
    value += (i * 10);
}


std::cout << value << std::endl;
```

13

for Loop with a Multistatement Body

Syntax

```
for (Initialization_Action; Boolean_Expression; Update_Action)
{
    Statement_1
    Statement_2
    :
    :
    Statement_Last
}
```



Example

```
for (int number = 100; number >= 0; number--)
{
    cout << number
        << " bottles of beer on the shelf.\n";
    if (number > 0)
        cout << "Take one down and pass it around.\n";
}
```

from: Problem Solving with C++, 10th Edition, Walter Savitch

14

Examples

```
int n = 1;

for ( ; n <= 10 ; n = n + 2)
    std::cout << n << std::endl;

for (n = 10 ; n > 0 ; n -= 2) std::cout << n << std::endl;

for (n = 0 ; n > -30 ; n = n - 7) {
    std::cout << n << std::endl;
}

for (double x = 16.0 ; x >= 2.0 ; x = sqrt(x)) {
    std::cout << x;
    std::cout << std::endl;
}
```

15

Careful with the semi-colon

- Semi-colon is used to end statements
- Placing it after the parenthesis of a **for** loop creates an **empty statement**

```
for (int count = 1 ; count <= 10 ; count++);
    std::cout << "Hello\n";
```

16

Careful with the semi-colon

```
for (int count = 1 ; count <= 10 ; count++);  
std::cout << count << std::endl;
```

V.S

```
for (int count = 1 ; count <= 10 ; ++count);  
std::cout << count << std::endl;
```

17

Question

- Write a single for loop to print the first 50 even numbers

18

Question

- Write a single for loop to print the first 50 even numbers

19

Question

- Write a single for loop to print the average of the first 25 multiples of 3

20

Question

- Write a single for loop to print the average of the first 25 multiples of 3