Memo Template - A Minimal Book Example¹







To Jung Jae-sung (1982 – 2018), a remarkably hard-working badminton player with a remarkably simple playing style



Contents

List of Tables	ix
List of Figures	хi
Prerequisites	xiii
Introduction	xv
Literature	xix
Methods	xxi
Applications	xxiii
0.1 Example one	
0.2 Example two	
Final Words	XXV



List of Tables

0.1	Here is a	nice tal	ole!																				XV
-----	-----------	----------	------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----



List of Figures

			C .										
Lana	10 3	2100	tiannal										377
TICIC	15 a	IIICC .	figure!										- A
			0										



Prerequisites

This is a *sample* book written in **Markdown**. You can use anything that Pandoc's Markdown supports, e.g., a math equation $a^2+b^2=c^2$.

The **bookdown** package can be installed from CRAN or Github:

```
install.packages("bookdown")
# or the development version
# devtools::install_github("rstudio/bookdown")
```

Remember each Rmd file contains one and only one chapter, and a chapter is defined by the first-level heading #.

To compile this example to PDF, you need XeLaTeX. You are recommended to install TinyTeX (which includes XeLaTeX): https://yihui.org/tinytex/.



Introduction

You can label chapter and section titles using {#label} after them, e.g., we can reference Chapter. If you do not manually label them, there will be automatic labels anyway, e.g., Chapter.

Figures and tables with captions will be placed in figure and table environments, respectively.

```
par(mar = c(4, 4, .1, .1))
plot(pressure, type = 'b', pch = 19)
```

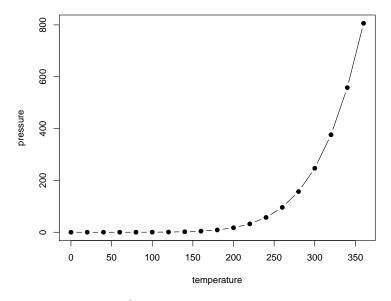


FIGURE 1: Here is a nice figure!

Reference a figure by its code chunk label with the fig: prefix,

xvi Introduction

TABLE 0.1: Here is a nice table!

_					
5	Sepal.Length	Sepal.Width	Petal.Length	Petal.Width	Species
	5.1	3.5	1.4	0.2	setosa
	4.9	3.0	1.4	0.2	setosa
	4.7	3.2	1.3	0.2	setosa
	4.6	3.1	1.5	0.2	setosa
	5.0	3.6	1.4	0.2	setosa
	5.4	3.9	1.7	0.4	setosa
	4.6	3.4	1.4	0.3	setosa
	5.0	3.4	1.5	0.2	setosa
	4.4	2.9	1.4	0.2	setosa
	4.9	3.1	1.5	0.1	setosa
	5.4	3.7	1.5	0.2	setosa
	4.8	3.4	1.6	0.2	setosa
	4.8	3.0	1.4	0.1	setosa
	4.3	3.0	1.1	0.1	setosa
	5.8	4.0	1.2	0.2	setosa
	5.7	4.4	1.5	0.4	setosa
	5.4	3.9	1.3	0.4	setosa
	5.1	3.5	1.4	0.3	setosa
	5.7	3.8	1.7	0.3	setosa
	5.1	3.8	1.5	0.3	setosa

e.g., see Figure 1. Similarly, you can reference tables generated from knitr::kable(), e.g., see Table 0.1.

```
knitr::kable(
  head(iris, 20), caption = 'Here is a nice table!',
  booktabs = TRUE
)
```

You can write citations, too. For example, we are using the bookdown

package (?) in this sample book, which was built on top of R Markdown and **knitr** (Xie, 2015).



0

Literature

Here is a review of existing methods.



0

Methods

We describe our methods in this chapter.



Applications

Some significant applications are demonstrated in this chapter.

- 0.1 Example one
- 0.2 Example two



0

Final Words

We have finished a nice book.



Bibliography

Xie, Y. (2015). *Dynamic Documents with R and knitr*. Chapman and Hall/CRC, Boca Raton, Florida, 2nd edition. ISBN 978-1498716963.