
DOOMSDAY EXPLORER: A DECENTRALIZED FRAMEWORK FOR ITERATIVE VERIFICATION OF CLASSICAL AND QUANTUM ENTROPY CLAIMS

A PREPRINT

Anonymous Authors
for peer review

July 7, 2026

ABSTRACT

Entropy is a foundational assumption of modern cryptography. Secure key generation, authentication protocols, digital signatures, blockchain systems, and numerous distributed protocols ultimately rely on physical or computational processes that are assumed to be unpredictable. Current certification methodologies, including statistical randomness testing, entropy estimation, and quantum validation protocols, provide empirical evidence that observed sequences are consistent with expected random behavior under specified assumptions. However, no finite collection of statistical tests can establish the absence of deterministic structure, implementation-specific vulnerabilities, or alternative physical explanations.

This paper presents *Doomsday Explorer*, a decentralized framework for continuously evaluating competing entropy hypotheses through independently replicated experimentation. Rather than introducing another randomness test, the framework provides an open computational infrastructure for evaluating both established certification assumptions and newly proposed models using identical experimental procedures.

Explorer Nodes formulate computational experiments, while Entropy Miners execute workloads independently. Selected tasks are replicated across multiple participants, allowing verification of published results, detection of inconsistent computations, and resistance to result withholding. The resulting body of evidence is publicly reproducible and evolves continuously as additional experiments are performed.

The framework is intentionally agnostic regarding the correctness of any individual entropy[5] model. Instead, it provides a methodology through which classical thermal-noise generators, quantum random number generators[4][1][2], and future entropy sources can be evaluated under a common decentralized process. Confidence is therefore accumulated through iterative approximation, independent replication, and publicly verifiable computation rather than centralized authority or one-time certification.

1 Introduction

Entropy occupies a unique position in modern information security. Unlike many cryptographic assumptions, the unpredictability of entropy sources cannot be established solely through mathematical proof. Instead, confidence is typically derived from physical models, engineering analysis, and statistical validation of experimentally observed output.

Classical true random number generators (TRNGs) derive entropy from physical phenomena such as thermal noise, oscillator jitter, or electronic avalanche processes. Quantum random number generators (QRNGs) derive entropy from measurements commonly interpreted as intrinsically probabilistic quantum events. Both approaches have motivated extensive research, standardization, and certification procedures, culminating in widely adopted testing methodologies such as the NIST Statistical Test Suite, entropy estimation procedures, and complementary validation frameworks.

These methodologies provide valuable evidence that observed output is statistically consistent with expected random behavior. However, statistical consistency alone cannot prove the absence of previously unknown deterministic mechanisms, implementation-specific artifacts, experimental bias, or incomplete physical models. Consequently, entropy validation remains an empirical scientific process rather than a mathematically complete proof of unpredictability.

Recent work published through the Doomsday Explorer project investigates both classical and quantum entropy sources using large-scale computational analysis, interactive experimentation, and publicly reproducible workflows. Rather than presenting isolated experimental claims, the project seeks to establish a methodology through which competing explanations may be evaluated under identical experimental conditions.

The central contribution of this paper is therefore methodological rather than adversarial. Instead of proposing another statistical randomness test, we present a decentralized framework for continuous experimental verification of entropy-related hypotheses. Independent participants execute computational workloads, replicate selected experiments, and publish reproducible evidence that may either reinforce or challenge existing assumptions. Importantly, the same infrastructure evaluates conventional certification methodologies, newly proposed entropy models, and the framework’s own predictions using identical computational procedures.

This perspective shifts entropy validation from one-time certification toward iterative scientific verification. Confidence emerges not from the authority of individual organizations, vendors, or research groups, but from reproducible evidence accumulated through independent experimentation. The proposed framework therefore complements existing standards by enabling continuous public evaluation of both established assumptions and unconventional hypotheses.

1.1 Motivation

Modern cryptographic systems increasingly depend upon entropy sources whose internal operation cannot be independently reproduced by every relying party. Certification procedures necessarily evaluate observable statistical behavior, physical implementation, and engineering assumptions. While these approaches have proven highly valuable, their conclusions remain conditional upon the correctness of the underlying models and experimental methodology.

Scientific progress has historically emerged through continuous replication rather than permanent certification. As computational resources become globally distributed, it becomes practical to apply the same principle to entropy research itself. Instead of relying exclusively on centralized laboratories, independent participants may execute identical experiments, compare results, and collectively refine confidence in competing hypotheses.

The Doomsday Explorer framework adopts this philosophy. Its objective is not to replace existing certification, nor to assume the correctness of any particular entropy model. Instead, it provides an open infrastructure through which empirical evidence may be accumulated, verified, and continuously re-evaluated as new theoretical models, experimental techniques, and computational capabilities emerge.

1.2 Contributions

The principal contributions of this work are summarized below.

1. A decentralized computational framework for reproducible evaluation of entropy-related hypotheses.
2. A replicated execution model that mitigates result withholding, enables independent verification, and supports public reproducibility.
3. A unified experimental methodology applicable to both classical and quantum entropy sources.
4. An iterative approximation process through which confidence in competing entropy models may evolve as additional evidence becomes available.
5. An open scientific infrastructure designed to complement, rather than replace, existing statistical validation standards.

2 Related Work

Randomness evaluation has traditionally been approached through statistical hypothesis testing, entropy estimation, physical characterization, and implementation analysis. Widely adopted standards, including the NIST Statistical Test Suite, Dieharder, TestU01, and SP 800-90B entropy estimation, provide practical methods for evaluating statistical properties of generated sequences. These methodologies have substantially improved the engineering quality of deployed entropy sources and remain essential components of modern cryptographic practice.

Quantum random number generators introduce additional validation techniques derived from quantum mechanical models, Bell-type experiments, and device characterization. While these approaches strengthen confidence in physical implementations, their conclusions remain dependent upon experimental assumptions, measurement fidelity, and the interpretation of observed phenomena.

Distributed computation has likewise evolved considerably through volunteer computing, blockchain consensus, distributed verification, and decentralized scientific collaboration. These systems demonstrate that large-scale computational tasks can be executed reliably by independent participants, provided appropriate mechanisms exist for verification and fault tolerance.

The present work combines these directions. Rather than proposing a new statistical randomness test or a replacement cryptographic primitive, Doomsday Explorer applies decentralized replicated computation to the scientific evaluation of entropy itself. The resulting framework treats both established assumptions and newly proposed hypotheses as experimentally testable models whose confidence may be continuously refined through publicly reproducible evidence.

3 System Model

The Doomsday Explorer framework is organized as a decentralized scientific computation network whose purpose is the reproducible evaluation of entropy-related hypotheses. Unlike conventional distributed computation systems, the objective is not merely computational throughput, but independent replication, transparent verification, and continuous accumulation of empirical evidence.

Three logical components participate in the framework:

- **Explorer Nodes** formulate experimental workloads, define computational parameters, and publish experiment descriptions.
- **Entropy Miners** independently execute computational tasks, produce experimental observations, and return reproducible results.
- The **Decentralized Verification Network** coordinates task distribution, selective replication, result aggregation, and publication of experimental evidence.

No participant is assumed to be trusted. Every published result may be independently reproduced, verified, or challenged by additional participants.

4 Network Architecture

Figure 1 illustrates the logical organization of the framework.

Explorer Nodes submit computational experiments to the decentralized verification network. The network distributes workloads among Entropy Miners, which execute assigned tasks independently.

To reduce the possibility of result withholding, implementation bias, or computational faults, selected workloads are intentionally replicated across multiple independent miners. Returned observations are compared, aggregated, and published together with sufficient metadata to enable subsequent independent reproduction.

This architecture separates experiment definition, experiment execution, and evidence publication, allowing individual participants to verify every stage of the computational workflow.

5 Replicated Experimental Execution

Traditional distributed computation often assumes that each computational task requires only a single execution. In contrast, the Doomsday Explorer framework intentionally introduces controlled redundancy.

A configurable fraction of submitted workloads is executed independently by multiple miners. Returned observations are compared before publication, allowing inconsistent executions, implementation-specific behavior, or malicious result withholding to be detected.

The replication policy serves several purposes.

1. Independent verification of published results.

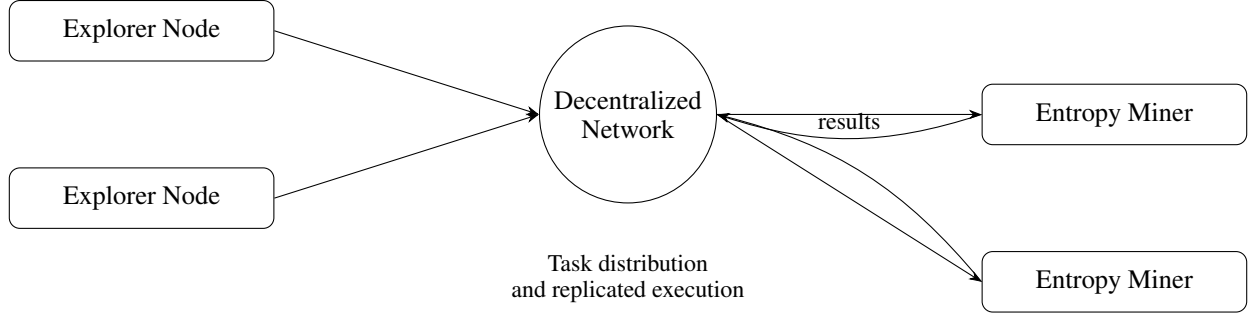


Figure 1: Logical architecture of the Doomsday Explorer framework. Explorer Nodes define computational experiments. The decentralized verification network distributes workloads, selectively replicates tasks, aggregates returned observations, and publishes reproducible evidence. Independent replication mitigates result withholding and enables verification of published computational results.

2. Detection of computational inconsistencies.
3. Resistance to selective disclosure.
4. Long-term measurement of experimental reproducibility.

Importantly, replication is treated as a scientific mechanism rather than a consensus protocol. Agreement between replicated executions does not establish correctness of an underlying hypothesis; instead, it establishes reproducibility of the computational experiment itself.

6 Iterative Approximation Framework

Entropy validation is formulated as an iterative approximation process rather than a binary certification decision.

Let

$$H = \{H_1, H_2, \dots, H_n\}$$

denote competing hypotheses regarding the behavior of an entropy source.

These hypotheses may include

- existing statistical models,
- physical models,
- implementation-specific explanations,
- newly proposed deterministic mechanisms.

Explorer Nodes construct experiments capable of discriminating between one or more hypotheses.

Entropy Miners execute those experiments.

Replicated execution establishes that reported observations are computationally reproducible.

Published evidence then updates confidence associated with competing models.

Unlike conventional certification, the framework never declares a hypothesis permanently verified or falsified. Instead, confidence evolves continuously as additional experiments become available.

This methodology naturally accommodates

- new entropy generators,
- new statistical techniques,
- alternative physical models,
- independent experimental reproduction.

Consequently, entropy assessment becomes a continuously evolving scientific process rather than a single certification event.

7 Threat Model

The framework considers both accidental and adversarial sources of error.

Potential threats include

1. faulty computational implementations,
2. selective publication of favorable results,
3. malicious participants returning fabricated computations,
4. implementation bias,
5. incomplete physical models,
6. statistical overfitting.

The framework does not assume that replicated execution alone proves the correctness of a scientific hypothesis. Rather, replication provides evidence that published computational observations can be reproduced independently.

Scientific conclusions remain subject to continued experimental evaluation as additional data become available.

8 Experimental Methodology

The Doomsday Explorer framework is designed to investigate entropy sources through reproducible computational experiments rather than through reliance on a single validation methodology. Every experiment is defined by a publicly reproducible specification, executed independently by multiple participants, and published together with sufficient metadata to permit subsequent verification.

The experimental methodology intentionally treats existing certification standards, new statistical models, and newly proposed deterministic hypotheses as competing explanations of observed behavior. No distinction is made between established and unconventional models during execution. Each hypothesis is evaluated using identical computational procedures, allowing confidence to evolve as additional evidence becomes available.

8.1 Classical Entropy Sources

Classical entropy generators derive unpredictability from physical phenomena including thermal noise, oscillator jitter, avalanche noise, chaotic oscillation, and related analog processes.

Existing validation procedures typically evaluate

- statistical properties,
- entropy estimates,
- implementation quality,
- environmental stability.

These methodologies have significantly improved the engineering quality of deployed entropy sources. However, they necessarily evaluate observable statistical behavior under specified experimental assumptions.

Within the Doomsday Explorer framework, classical entropy generators are treated as experimental systems whose behavior may be examined using alternative computational models, large-scale statistical analysis, and independently replicated experimentation.

8.2 Quantum Entropy Sources

Quantum random number generators are commonly justified through probabilistic interpretations of quantum measurement. Practical implementations employ physical processes including single-photon detection, beam splitters, vacuum fluctuations, or related quantum phenomena.

Certification generally combines

- physical device characterization,
- statistical testing,
- implementation analysis,
- quantum-specific experimental validation.

The Doomsday Explorer methodology neither assumes nor rejects any particular interpretation of quantum mechanics. Instead, QRNG implementations are treated as experimentally accessible systems whose observable behavior may be evaluated using the same reproducible computational framework applied to classical generators.

This symmetry is intentional. The objective is not to privilege classical or quantum models, but to evaluate both using identical scientific procedures.

9 Evidence Accumulation

Unlike conventional certification, which typically culminates in a pass/fail decision, the proposed framework accumulates evidence continuously.

Each completed experiment contributes

- reproducible computational observations,
- associated experimental parameters,
- replication statistics,
- independent verification records.

Together, these observations form an evolving public corpus through which competing entropy models may be evaluated.

The framework therefore separates

1. experimental observation,
2. statistical interpretation,
3. scientific conclusion.

This separation permits multiple researchers to interpret identical experimental data using different theoretical models without requiring modification of the underlying infrastructure.

10 Application to Entropy Research

The Doomsday Explorer project applies the proposed methodology to a broad collection of entropy-related investigations.

Representative application domains include

- classical thermal-noise generators,
- hardware entropy devices,
- operating-system entropy sources,
- quantum random number generators,
- Bell-type experimental datasets,
- entropy estimation procedures,
- statistical validation methodologies.

Each investigation follows the same computational workflow.

Explorer Nodes formulate reproducible experiments.

Independent participants execute assigned workloads.

Selected tasks are replicated.

Returned observations are published together with sufficient metadata to permit subsequent independent verification.

Consequently, all experimental evidence produced by the framework is intended to remain reproducible, extensible, and open to reinterpretation as new theoretical models emerge.

11 Relationship to Existing Standards

The proposed framework is intended to complement, rather than replace, existing certification methodologies.

Statistical testing frameworks, including NIST SP 800 series recommendations, remain valuable engineering tools for detecting many classes of implementation defects, bias, and statistical anomalies.

Similarly, physical characterization remains essential for understanding entropy-generating devices.

The Doomsday Explorer framework addresses a different question.

Rather than asking whether a generator satisfies a predefined statistical standard, the framework asks whether competing scientific explanations continue to remain consistent with an expanding body of independently reproducible evidence.

This distinction transforms entropy validation from a finite certification procedure into a continuously evolving experimental process.

12 Discussion

Entropy research occupies an unusual position at the intersection of mathematics, physics, statistics, and engineering.

No finite experimental program can conclusively establish the unpredictability of a physical process. Likewise, no individual statistical anomaly necessarily invalidates an existing physical model.

Consequently, scientific progress requires continuous experimentation, independent replication, and transparent publication of evidence.

The Doomsday Explorer framework is motivated by this philosophy.

Its objective is not to replace established standards, nor to promote any specific interpretation of classical or quantum physics. Instead, it provides computational infrastructure through which competing hypotheses may be evaluated using identical, publicly reproducible experimental procedures.

The framework therefore shifts emphasis from authority-based validation toward evidence-based refinement, allowing confidence in entropy models to evolve as additional computational and experimental observations become available.

13 Representative Investigations

The Doomsday Explorer project applies the proposed verification framework to a growing collection of entropy-related investigations.

These investigations currently include analyses of

- classical thermal-noise entropy generators,
- hardware true random number generators,
- quantum random number generators,
- Bell-type experimental protocols,
- entropy estimation methodologies,
- statistical certification procedures.

Each investigation is expressed as a reproducible computational workflow rather than a single published result. Experimental specifications, analysis software, input datasets, and computational observations are intended to remain independently reproducible by future participants.

This approach allows scientific conclusions to evolve naturally as additional evidence becomes available, rather than requiring previous publications to remain permanently authoritative.

14 Limitations

The proposed framework intentionally separates scientific methodology from scientific conclusion.

Replicated computation does not, by itself, establish the correctness of any physical theory, statistical model, or entropy source. Instead, it establishes that published computational observations may be independently reproduced under identical experimental conditions.

Likewise, statistical inconsistency does not necessarily imply deterministic behavior, nor does statistical consistency establish true unpredictability.

Scientific interpretation therefore remains dependent upon theoretical analysis, experimental design, and continued independent investigation.

The framework should consequently be viewed as infrastructure for entropy research rather than as a replacement for existing cryptographic standards or physical validation procedures.

15 Future Work

Several directions remain open for future investigation.

First, the range of supported entropy sources may be expanded to include additional hardware devices, analog physical systems, hybrid entropy generators, and emerging quantum technologies.

Second, the iterative approximation framework may incorporate additional statistical techniques, information-theoretic measures, and machine-learning-assisted anomaly detection while preserving complete experimental reproducibility.

Third, public participation may substantially increase the scale of computational evidence available for evaluating competing entropy hypotheses.

Finally, future work will investigate how decentralized experimental verification may be applied beyond entropy research, including broader questions involving computational reproducibility, scientific replication, and distributed verification of empirical claims.

16 Conclusion

Entropy remains one of the most fundamental assumptions underlying modern cryptographic security. Although existing certification methodologies provide substantial confidence in deployed entropy sources, their conclusions necessarily depend upon experimental assumptions, physical models, and observable statistical behavior.

This paper has presented Doomsday Explorer, a decentralized framework for iterative verification of entropy-related hypotheses.

Rather than introducing another statistical randomness test, the framework establishes an open scientific infrastructure through which competing models may be evaluated using identical, publicly reproducible computational procedures.

Explorer Nodes formulate reproducible experiments, Entropy Miners execute computational workloads, and selective replication enables independent verification of published observations. Confidence in competing hypotheses therefore evolves through continuous evidence accumulation rather than centralized authority or one-time certification.

The framework is intentionally agnostic with respect to individual physical models. Classical entropy sources, quantum entropy sources, and future experimental systems are all treated as subjects of continuous scientific investigation.

By combining decentralized computation, experimental replication, and transparent publication, the proposed methodology extends entropy research from isolated experimental studies toward an evolving, community-driven process of scientific verification.

Data Availability

The Doomsday Explorer project publishes experimental software, datasets, documentation, and computational results through publicly accessible repositories to enable independent reproduction of the experiments described in this work.

Project Identity

The Doomsday Explorer project[3] is identified by the following Bitcoin Taproot address:

`bc1qekvmkczge3hxrvmf2lj3yyvgjnp3n3fdf9lg`

Message: "Doomsday Explorer Project for Bitcoin:
`https://github.com/dk14/crypto/tree/main/chats/btc-audit`"

Signature:

`IHdq/tIQtQeimfF92N0y00dz2/iq2YR6qjD8vLgHWK3GGGETKX76L0e4Tvgtb1f0HrbLiW87QYIu0dCKYbSvmpA=`

This address serves as a persistent cryptographic identifier for the project. Future public announcements, software releases, and experimental reports may be authenticated by signatures produced with the corresponding private key.

Acknowledgements

The authors thank members of the open scientific and cryptographic communities whose independent analysis, discussion, and replication efforts continue to improve the quality, reproducibility, and transparency of entropy research.

References

- [1] Doomsday Explorer Project. Bell-type experimental investigations. <https://q.doomsdayexplorer.online>, 2026. Experimental framework and discussion of Bell-type protocols.
- [2] Doomsday Explorer Project. Quantum entropy investigations. <https://fqc.doomsdayexplorer.online>, 2026. Current project description replacing earlier quantum notes.
- [3] Doomsday Explorer Project. Thermal noise investigations and classical entropy research. <https://doomsdayexplorer.online>, 2026. Experimental investigations of classical TRNG security and entropy generation.
- [4] Miguel Herrero-Collantes and Juan Carlos Garcia-Escartin. Quantum random number generators. *Reviews of Modern Physics*, 89(1), 2017.
- [5] Claude E. Shannon. Communication theory of secrecy systems. *Bell System Technical Journal*, 28(4):656–715, 1949.