
PostgreSQL Data Model

Packing Control Board — complete listing of the PostgreSQL tables and views used by the application

SCHEMA

d365fo

RELATIONS

4 tables · 0 views

GENERATED

September 18, 2026 · 9:15 AM IST


Scope and Summary

This document combines application query analysis with live PostgreSQL catalog metadata. It lists every PostgreSQL relation referenced by the Packing Control Board, including complete column definitions, constraints, indexes, and the application's access pattern.

Result: The application uses four PostgreSQL tables in schema d365fo. No PostgreSQL views are referenced or present among the used relations.

RELATION	TYPE	COLUMNS	APPLICATION ACCESS
d365fo.salesorderheaderv3staging	TABLE	209	SELECT only
d365fo.sessions	TABLE	3	SELECT / INSERT / UPDATE / DELETE via session store
d365fo.in_packing_entries	TABLE	2	SELECT / INSERT
d365fo.pack_statuses	TABLE	2	SELECT / INSERT / UPDATE

Logical data flow

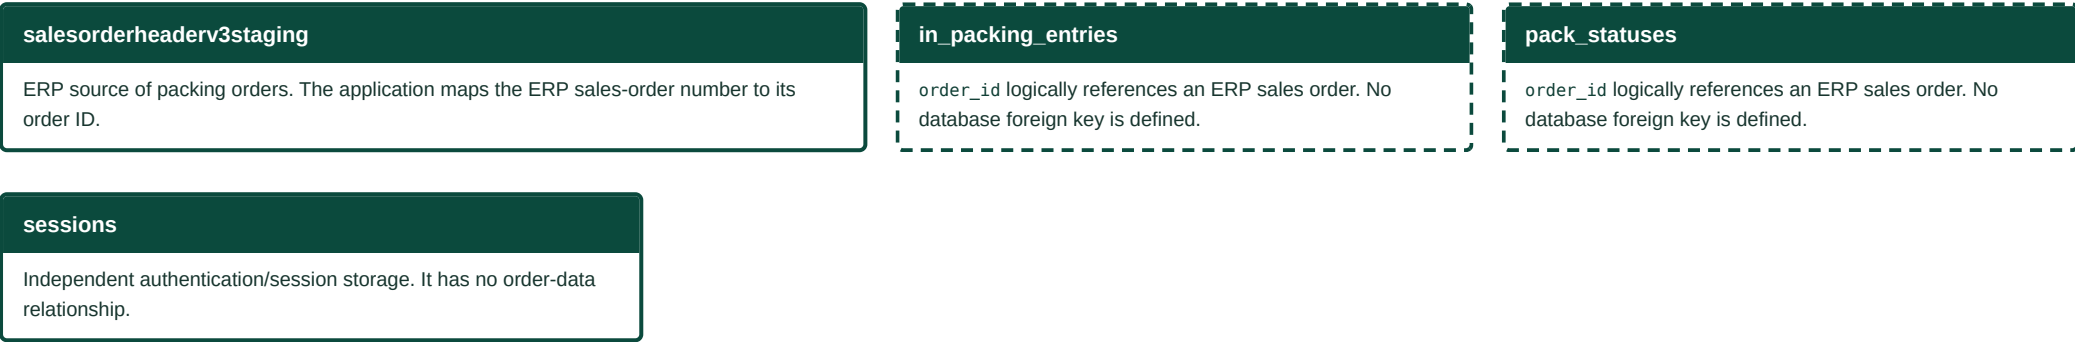

Logical relationships shown above are enforced by application identifiers, not PostgreSQL foreign-key constraints.

d365fo.salesorderheaderv3staging

209 columns

Read-only D365 sales-order source used to select open orders currently in packing and map ERP shipping, customer, routing, and status fields into the Packing Control Board.

APPLICATION ACCESS

SELECT only

KEY USAGE

salesordernumber is mapped to the application order ID

CONSTRAINTS

CHECK: 486597_561676_1_not_null; CHECK: 486597_561676_206_not_null; CHECK: 486597_561676_207_not_null;
 CHECK: 486597_561676_20_not_null; CHECK: 486597_561676_21_not_null; CHECK: 486597_561676_22_not_null;
 CHECK: 486597_561676_28_not_null; CHECK: 486597_561676_6_not_null; CHECK: 486597_561676_9_not_null;
 PRIMARY KEY: salesordernumber, salesordernumber, dataareaid, dataareaid

INDEXES

pk_salesorderheaderv3staging

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
1	salesordernumber	character varying(100)	No	–
2	defaulttledgerdimensiondisplayvalue	character varying(500)	Yes	–
3	isdeliveryaddressorderspecific	integer(32,0)	Yes	–
4	deliveryaddresscountryregionisocode	character varying(2)	Yes	–
5	isexportsale	integer(32,0)	Yes	–
6	salesorderprocessingstatus	integer(32,0)	No	–
7	aretotalscalculated	integer(32,0)	Yes	–
8	transportationdocumentlineid	uuid	Yes	–
9	ordercreationdatetime	timestamp without time zone	No	–
10	skipcreateautocharges	integer(32,0)	Yes	–
11	reportingcurrencyfixedexchangerate	numeric(28,6)	Yes	–
12	shippingcarriercustomeraccountnumber	character varying(20)	Yes	–
13	overridesalestax	integer(32,0)	Yes	–
14	fulfillmentpolicyname	character varying(80)	Yes	–
15	fullrunctpstatus	integer(32,0)	Yes	–
16	definitiongroup	character varying(60)	Yes	–
17	executionid	character varying(90)	Yes	–
18	isselected	integer(32,0)	Yes	–
19	transferstatus	integer(32,0)	Yes	–
20	salesorderstatus	integer(32,0)	No	–
21	orderingcustomeraccountnumber	character varying(80)	No	–
22	invoicecustomeraccountnumber	character varying(80)	No	–
23	linediscountcustomergroupcode	character varying(10)	Yes	–

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
24	cashdiscountcode	character varying(10)	Yes	–
25	paymenttermsbasedate	timestamp without time zone	Yes	–
26	commissioncustomergroupid	character varying(10)	Yes	–
27	contactpersonid	character varying(20)	Yes	–
28	currencycode	character varying(3)	No	–
29	customersorderreference	character varying(80)	Yes	–
30	salesorderpromisingmethod	integer(32,0)	Yes	–
31	deliveryaddressname	character varying(250)	Yes	–
32	totaldiscountpercentage	numeric(28,6)	Yes	–
33	deliverymodecode	character varying(10)	Yes	–
34	deliveryreasoncode	character varying(10)	Yes	–
35	deliverytermscode	character varying(10)	Yes	–
36	email	character varying(80)	Yes	–
37	totaldiscountcustomergroupcode	character varying(10)	Yes	–
38	exportreason	character varying(30)	Yes	–
39	fixedduedate	timestamp without time zone	Yes	–
40	fixedexchangerate	numeric(28,16)	Yes	–
41	invoicepaymentattachmenttype	integer(32,0)	Yes	–
42	arepricesinclusingsalestax	integer(32,0)	Yes	–
43	defaultshippingwarehouseid	character varying(10)	Yes	–
44	defaultshippingsiteid	character varying(10)	Yes	–
45	languageid	character varying(7)	Yes	–
46	eusaleslistcode	integer(32,0)	Yes	–
47	chargecustomergroupid	character varying(10)	Yes	–
48	issalesprocessingstopped	integer(32,0)	Yes	–
49	multilinediscountcustomergroupcode	character varying(10)	Yes	–
50	numbersequencegroupid	character varying(10)	Yes	–
51	isonetimecustomer	integer(32,0)	Yes	–
52	paymenttermsname	character varying(100)	Yes	–
53	paymentschedulename	character varying(30)	Yes	–
54	customerpaymentmethodname	character varying(10)	Yes	–
55	customerpaymentmethodspecificationname	character varying(10)	Yes	–
56	willautomaticinventoryreservationconsiderbatchattributes	integer(32,0)	Yes	–

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
57	salesrebatecustomergroupid	character varying(20)	Yes	–
58	tmacustomergroupid	character varying(10)	Yes	–
59	intrastatportid	character varying(10)	Yes	–
60	customerpostingprofileid	character varying(10)	Yes	–
61	pricecustomergroupcode	character varying(10)	Yes	–
62	customerrequisitionnumber	character varying(20)	Yes	–
63	quotationnumber	character varying(100)	Yes	–
64	confirmedreceiptdate	timestamp without time zone	Yes	–
65	requestedreceiptdate	timestamp without time zone	Yes	–
66	inventoryreservationmethod	integer(32,0)	Yes	–
67	commissionsalesrepresentativegroupid	character varying(10)	Yes	–
68	salesordername	character varying(80)	Yes	–
69	salesorderorigincode	character varying(10)	Yes	–
70	salesorderpoolid	character varying(10)	Yes	–
71	salesunitid	character varying(20)	Yes	–
72	customertransactionsettlementtype	integer(32,0)	Yes	–
73	confirmedshippingdate	timestamp without time zone	Yes	–
74	requestedshippingdate	timestamp without time zone	Yes	–
75	campaignid	character varying(10)	Yes	–
76	intrastatstatisticsprocedurecode	character varying(10)	Yes	–
77	salestaxgroupcode	character varying(10)	Yes	–
78	intrastattransactioncode	character varying(10)	Yes	–
79	intrastattransportmodecode	character varying(10)	Yes	–
80	url	character varying(255)	Yes	–
81	taxexemptnumber	character varying(20)	Yes	–
82	directdebitmandateid	character varying(35)	Yes	–
83	orderresponsiblepersonnelnumber	character varying(25)	Yes	–
84	ordertakerpersonnelnumber	character varying(25)	Yes	–
85	isentrycertificaterequired	integer(32,0)	Yes	–
86	isownentrycertificateissued	integer(32,0)	Yes	–
87	invoicetype	integer(32,0)	Yes	–
88	transportationbrokerid	character varying(20)	Yes	–
89	shippingcarrierid	character varying(20)	Yes	–

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
90	shippingcarrierservicegroupid	character varying(20)	Yes	–
91	shippingcarrierserviceid	character varying(20)	Yes	–
92	transportationmodeid	character varying(20)	Yes	–
93	transportationrouteplanid	character varying(20)	Yes	–
94	transportationtemplateid	character varying(20)	Yes	–
95	formatteddeliveryaddress	character varying(250)	Yes	–
96	deliverybuildingcompliment	character varying(60)	Yes	–
97	deliveryaddresscity	character varying(80)	Yes	–
98	deliveryaddresscountryregionid	character varying(10)	Yes	–
99	deliveryaddresscountyid	character varying(30)	Yes	–
100	deliveryaddressdescription	character varying(80)	Yes	–
101	deliveryaddressdistrictname	character varying(60)	Yes	–
102	deliveryaddressdunsnumber	character varying(9)	Yes	–
103	isdeliveryaddressprivate	integer(32,0)	Yes	–
104	deliveryaddresslatitude	numeric(28,10)	Yes	–
105	deliveryaddresslocationid	character varying(40)	Yes	–
106	deliveryaddresslongitude	numeric(28,10)	Yes	–
107	deliveryaddresspostbox	character varying(20)	Yes	–
108	deliveryaddressstateid	character varying(10)	Yes	–
109	deliveryaddressstreet	character varying(250)	Yes	–
110	deliveryaddressstreetnumber	character varying(20)	Yes	–
111	deliveryaddresstimezone	integer(32,0)	Yes	–
112	deliveryaddresszipcode	character varying(10)	Yes	–
113	deliveryaddresscityinkana	character varying(60)	Yes	–
114	deliveryaddressstreetinkana	character varying(250)	Yes	–
115	isconsolidatedinvoicetarget	integer(32,0)	Yes	–
116	einvoicedimensionaccountcode	character varying(35)	Yes	–
117	iseinvoicedimensionaccountcodespecifiedperline	integer(32,0)	Yes	–
118	creditnotereasoncode	character varying(10)	Yes	–
119	bankconstantsymbol	character varying(10)	Yes	–
120	bankspecificsymbol	character varying(100)	Yes	–
121	cfpscode	character varying(4)	Yes	–
122	isfinaluser	integer(32,0)	Yes	–

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
123	customerpaymentfinecode	character varying(10)	Yes	–
124	customerpaymentfinancialinterestcode	character varying(10)	Yes	–
125	fiscaloperationpresencetype	integer(32,0)	Yes	–
126	isservedeliveryaddressbased	integer(32,0)	Yes	–
127	servicefiscalinformationcode	character varying(10)	Yes	–
128	fiscaldocumentoperationtypeid	character varying(10)	Yes	–
129	invoiceaddressstreet	character varying(250)	Yes	–
130	formattedinvoiceaddress	character varying(250)	Yes	–
131	invoicebuildingcompliment	character varying(60)	Yes	–
132	invoiceaddresscity	character varying(80)	Yes	–
133	invoiceaddresscountryregionid	character varying(10)	Yes	–
134	invoiceaddresscountyid	character varying(30)	Yes	–
135	invoiceaddressdistrictname	character varying(60)	Yes	–
136	isinvoiceaddressprivate	integer(32,0)	Yes	–
137	invoiceaddresslatitude	numeric(28,10)	Yes	–
138	invoiceaddresslongitude	numeric(28,10)	Yes	–
139	invoiceaddresspostbox	character varying(20)	Yes	–
140	invoiceaddressstateid	character varying(10)	Yes	–
141	invoiceaddressstreetnumber	character varying(20)	Yes	–
142	excludefrommasterplanning	integer(32,0)	Yes	–
143	invoiceaddresstimezone	integer(32,0)	Yes	–
144	invoiceaddresszipcode	character varying(10)	Yes	–
145	invoiceaddresscityinkana	character varying(60)	Yes	–
146	invoiceaddressstreetinkana	character varying(250)	Yes	–
147	ordertotalamount	numeric(28,6)	Yes	–
148	ordertotalchargesamount	numeric(28,6)	Yes	–
149	ordertotaldiscountamount	numeric(28,6)	Yes	–
150	ordertotaltaxamount	numeric(28,6)	Yes	–
151	orderheadertaxamount	numeric(28,6)	Yes	–
152	totaldiscountamount	numeric(28,6)	Yes	–
153	invoiceaddresscountryregionisocode	character varying(2)	Yes	–
154	projectid	character varying(25)	Yes	–
155	basedocumentdate	timestamp without time zone	Yes	–

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
156	cipecode	character varying(15)	Yes	–
157	basedocumentnumber	character varying(20)	Yes	–
158	basedocumenttype	integer(32,0)	Yes	–
159	basedocumentitemnumber	character varying(20)	Yes	–
160	basedocumentlinenumber	integer(32,0)	Yes	–
161	orderoragreementcode	character varying(100)	Yes	–
162	tendercode	character varying(15)	Yes	–
163	thirdpartysalesdigitalplatform	integer(32,0)	Yes	–
164	thirdpartysalesdigitalplatformcnpj	character varying(20)	Yes	–
165	revrecfolloworiginalpricingmethod	integer(32,0)	Yes	–
166	revrecontractenddate	timestamp without time zone	Yes	–
167	revrecontractstartdate	timestamp without time zone	Yes	–
168	revrelatestreversejournal	bigint(64,0)	Yes	–
169	revrecmultiplesoreallocation	integer(32,0)	Yes	–
170	revrecreallocationid	character varying(20)	Yes	–
171	skipglobalunifiedpricingcalculation	integer(32,0)	Yes	–
172	retailchanneltable	bigint(64,0)	Yes	–
173	tormapriority	integer(32,0)	Yes	–
174	inreview	integer(32,0)	Yes	–
175	tocustomerdeliveryemail	character varying(80)	Yes	–
176	tocarrieraccount	character varying(10)	Yes	–
177	tomachinetype	character varying(50)	Yes	–
178	mcrorderstopped	integer(32,0)	Yes	–
179	salestype	integer(32,0)	Yes	–
180	testakastdamt	integer(32,0)	Yes	–
181	addresssalesresponsible	bigint(64,0)	Yes	–
182	akanonstdsocommissionamt	numeric(28,6)	Yes	–
183	bank	character varying(10)	Yes	–
184	dayonhold	integer(32,0)	Yes	–
185	deliverysalesgroup	character varying(10)	Yes	–
186	departmentonst	character varying(10)	Yes	–
187	dlvpaymtermid	character varying(10)	Yes	–
188	engineeringnotes	character varying(80)	Yes	–

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
189	gbsprintttype	integer(32,0)	Yes	–
190	inpacking	integer(32,0)	Yes	–
191	leadtimeplatform	integer(32,0)	Yes	–
192	onhold	integer(32,0)	Yes	–
193	scribecrmkey	character varying(64)	Yes	–
194	smaserviceorderid	character varying(10)	Yes	–
195	testakanonstdcom	numeric(28,6)	Yes	–
196	delcontactname	character varying(80)	Yes	–
197	thirdpartyaddressto	character varying(1000)	Yes	–
198	orderidcrm	character varying(64)	Yes	–
199	crmquotenum	character varying(64)	Yes	–
200	eoriuk	character varying(70)	Yes	–
201	custgroup	character varying(10)	Yes	–
202	toadditionalssupport	numeric(28,6)	Yes	–
203	tophone	character varying(20)	Yes	–
204	tonocharge	integer(32,0)	Yes	–
205	agencyorder	integer(32,0)	Yes	–
206	dataareaid	character varying(4)	No	–
207	syncstartdatetime	timestamp without time zone	No	–
208	tomodifieddatetime	timestamp without time zone	Yes	–
209	partition	character varying(20)	Yes	–

TABLE

d365fo.sessions

3 columns

Server-side authenticated web session storage used by the Microsoft sign-in flow.

APPLICATION ACCESS
SELECT / INSERT / UPDATE / DELETE via session store

CONSTRAINTS
CHECK: 486597_3186158_1_not_null; CHECK: 486597_3186158_2_not_null; CHECK: 486597_3186158_3_not_null;
PRIMARY KEY: sid

KEY USAGE
sid is the primary key

INDEXES
sessions_expire_idx, sessions_pkey

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
1	sid	character varying	No	–
2	sess	jsonb	No	–
3	expire	timestamp without time zone	No	–

TABLE

d365fo.in_packing_entries

2 columns

App-owned timestamps recording when each sales order first entered the Packing Control Board workflow.

APPLICATION ACCESS SELECT / INSERT	KEY USAGE order_id is the primary key and logically refers to an ERP sales order
CONSTRAINTS CHECK: 486597_3187289_1_not_null; CHECK: 486597_3187289_2_not_null; PRIMARY KEY: order_id	INDEXES in_packing_entries_pkey

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
1	order_id	text	No	—
2	entered_packing_at	timestamp with time zone	No	now()

TABLE

d365fo.pack_statuses

2 columns

App-owned shared packing status for System orders, including the time packing started.

APPLICATION ACCESS SELECT / INSERT / UPDATE	KEY USAGE order_id is the primary key and logically refers to an ERP sales order
CONSTRAINTS CHECK: 486597_3187297_1_not_null; PRIMARY KEY: order_id	INDEXES pack_statuses_pkey

#	COLUMN	POSTGRESQL TYPE	NULLABLE	DEFAULT
1	order_id	text	No	–
2	pack_started_at	timestamp with time zone	Yes	–

Views and Relationship Notes

Views

No PostgreSQL views are used by the application in the inspected schema.

Physical foreign keys

No foreign-key constraints were reported for the four used tables.

Logical relationships

- in_packing_entries.order_id → ERP sales order identifier from salesorderheaderv3staging.
- pack_statuses.order_id → ERP sales order identifier from salesorderheaderv3staging.
- sessions is independent and stores authenticated session state.

Source note

Catalog details were read from PostgreSQL information_schema, pg_class, pg_indexes, and pg_views. Application usage was determined from the current server-side source code.