



## EXPERIMENT - 2

**Student Name: Dikshay Sharma**

**UID: 23BCS11096**

**Branch: BE-CSE**

**Section/Group: KRG 1-A**

**Semester: 5<sup>th</sup>**

**Date of Performance: 31/07/2025**

**Subject Name: ADBMS**

**Subject Code: 23CSP-333**

### 1. **AIM:**

#### **Ques 1 :- Organizational Hierarchy Explorer**

You are a Database Engineer at TalentTree Inc., an enterprise HR analytics platform that stores employee data, including their reporting relationships. The company maintains a centralized Employee relation that holds:

Each employee's ID, name, department, and manager ID (who is also an employee in the same table).

Your task is to generate a report that maps employees to their respective managers, showing:

The employee's name and department

Their manager's name and department (if applicable)

This will help the HR department visualize the internal reporting hierarchy.

EmpID	Ename	Department	ManagerID
1	Alice	HR	NULL
2	Bob	Finance	1
3	Charlie	IT	1
4	David	Finance	2
5	Eve	IT	3
6	Frank	HR	1

### 2. **TOOLS USED:-** MS SSMS & Microsoft SQL Server **3. SQL CODE:**

CREATE TABLE Employee (

EmpID INT PRIMARY KEY,



# DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING

Discover. Learn. Empower.

```
EmpName VARCHAR(50) NOT NULL,  
Department VARCHAR(50) NOT NULL,  
ManagerID INT NULL  
);  
  
ALTER TABLE Employee  
ADD CONSTRAINT FK_Manager FOREIGN KEY (ManagerID) REFERENCES Employee(EmpID);  
INSERT INTO Employee (EmpID, EmpName, Department, ManagerID)  
VALUES  
(1, 'Alice', 'HR', NULL),  
(2, 'Bob', 'Finance', 1),  
(3, 'Charlie', 'IT', 1),  
(4, 'David', 'Finance', 2),  
(5, 'Eve', 'IT', 3),  
(6, 'Frank', 'HR', 1);  
  
SELECT  
E.EmpName AS [EmployeeName],  
E.Department AS [EmployeeDept],  
M.EmpName AS [Manager Name],  
M.Department AS [ManagerDept]  
FROM Employee AS E  
JOIN Employee AS M  
  
ON E.ManagerId = M.EmpID;
```

## 4. OUTPUT:

	EmployeeName	EmployeeDept	Manager Name	ManagerDept
1	Bob	Finance	Alice	HR
2	Charlie	IT	Alice	HR
3	David	Finance	Bob	Finance
4	Eve	IT	Charlie	IT
5	Frank	HR	Alice	HR

## 5. Ques 2: -Financial Forecast Matching with Fallback Strategy (hard)

You are a Data Engineer at FinSight Corp, a company that models Net Present Value (NPV) projections for investment decisions. Your system maintains two key datasets:

1. Year\_tbl: Actual recorded NPV's of various financial instruments over different years: ID: Unique Financial instrument identifier.

YEAR: Year of record

NPV: Net Present Value in that year

2. Queries\_tbl: A list of instrument-year pairs for which stakeholders are requesting NPV values:

ID: Financial instrument identifier YEAR:

Year of interest.

Find the NPV of each query from the Queries table. Return the output order by ID and Year in the sorted form.

However, not all ID-YEAR combinations in the Queries table are present in the Year\_tbl. If an NPV is missing for a requested combination, assume it to be 0 to maintain a consistent financial report.

ID	YEAR	NPV	ID	YEAR
1	2018	100	1	2019
7	2020	30	2	2008
13	2019	40	3	2009
1	2019	113	7	2018
2	2008	121	7	2019
3	2009	12	7	2020
11	2020	99	13	2019
7	2019	0		

Year Table

Queries Table

## 6. SQL CODE:-



# DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING

Discover. Learn. Empower.

```
CREATE TABLE YEARS_TBL(  
    ID INT,  
    YEAR INT, NPV  
    INT  
)  
INSERT INTO YEARS_TBL(ID, YEAR, NPV)  
VALUES  
(1,2018,100),  
(7,2020,30),  
(13,2019,40),  
(1,2019,113),  
(2,2008,121),  
(3,2002,12),  
(11,2020,99),  
(7,2019,0);
```

```
CREATE TABLE QUERIES_TBL(  
    ID INT,  
    YEAR INT  
);  
INSERT INTO QUERIES_TBL(ID, YEAR)  
VALUES  
(1,2019),  
(2,2008),  
(3,2009),  
(7,2018),  
(7,2019),  
(7,2020),  
(13,2019);
```

```
SELECT Q.*,ISNULL(Y.NPV,0) AS [NPV]  
FROM  
YEARS_TBL AS Y
```

RIGHT OUTER JOIN QUERIES\_TBL

AS Q


ON

Y.ID = Q.ID

AND

Y.YEAR = Q.YEAR

## 7. OUTPUT

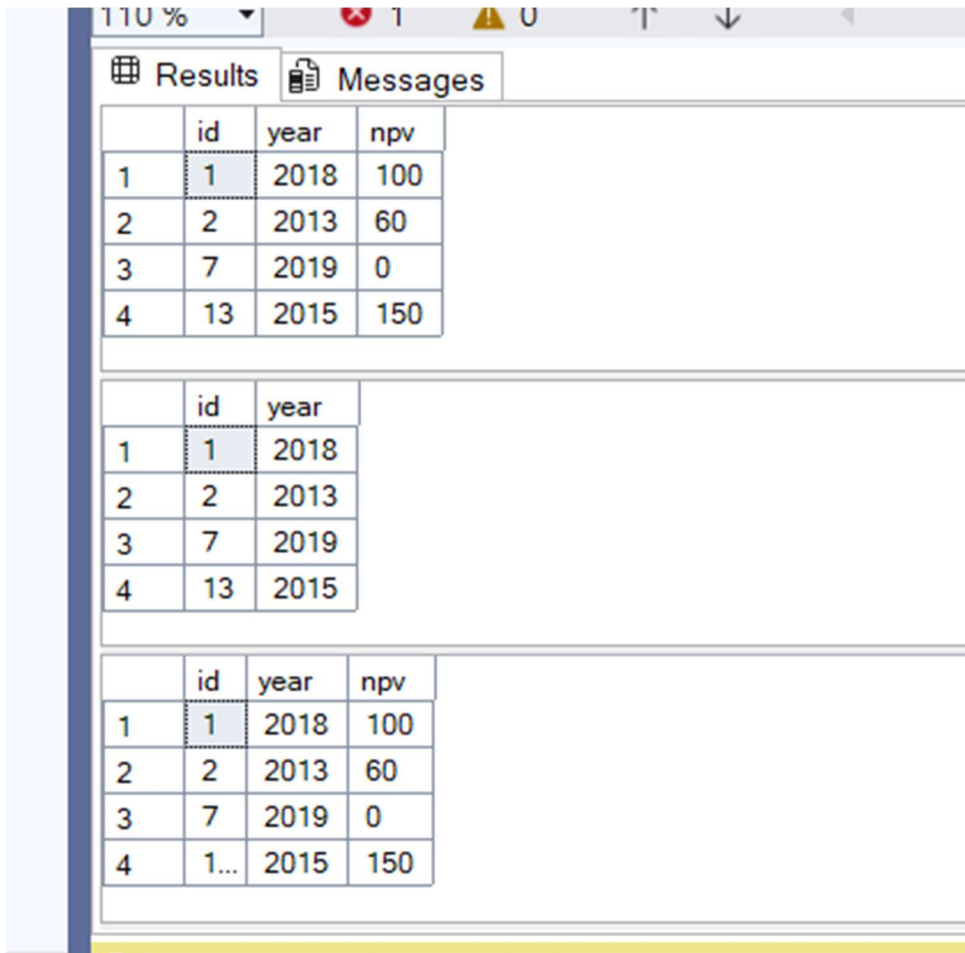

The screenshot shows a database client interface with a 'Results' tab. It displays three tables of data, each with a header row and four data rows. The first table has columns 'id', 'year', and 'npv'. The second table has columns 'id' and 'year'. The third table has columns 'id', 'year', and 'npv'.

	id	year	npv
1	1	2018	100
2	2	2013	60
3	7	2019	0
4	13	2015	150

	id	year
1	1	2018
2	2	2013
3	7	2019
4	13	2015

	id	year	npv
1	1	2018	100
2	2	2013	60
3	7	2019	0
4	1...	2015	150