
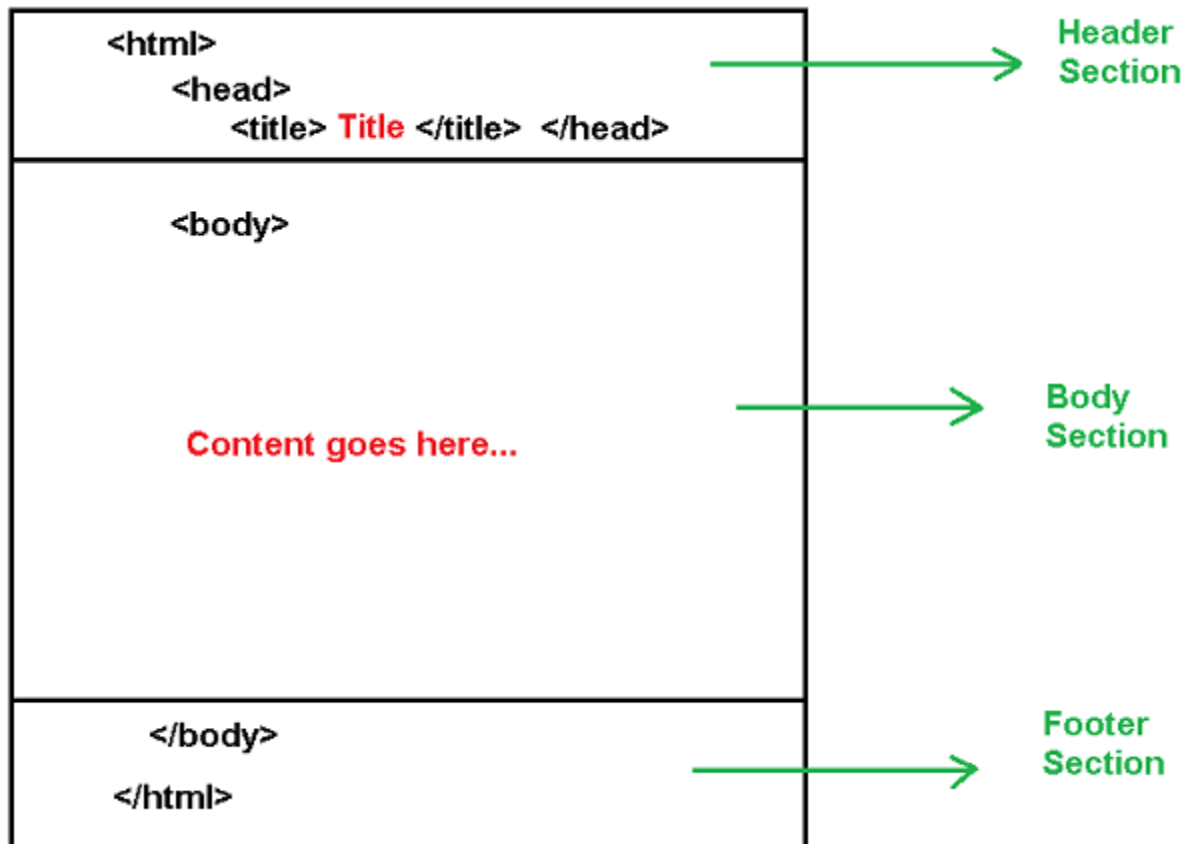


What is HTML?

HTML (HyperText Markup Language) is the standard markup language used to create and structure web pages.

It tells the browser **what content to display** and **how it is organized**, not how it looks (that is handled by CSS).

Basic Structure of an HTML Document

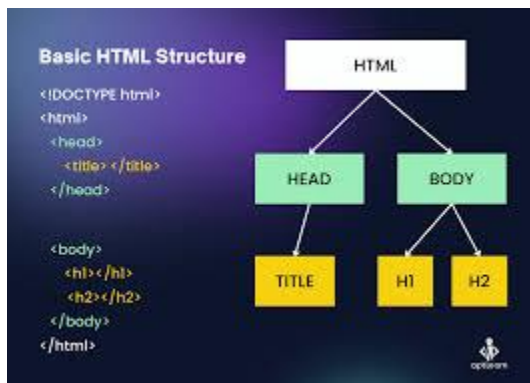

```

<!doctype html>
<html class="no-js" lang="">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="x-ua-compatible" content="ie=edge">
    <title></title>
    <meta name="description" content="">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <link rel="apple-touch-icon" href="apple-touch-icon.png">
    <!-- Place favicon.ico in the root directory -->

    <link rel="stylesheet" href="css/normalize.css">
    <link rel="stylesheet" href="css/main.css">
    <script src="js/vendor/modernizr-2.8.3.min.js"></script>
  </head>
  <body>

    <!-- Add your site or application content here -->
    <p>Hello world! This is HTML5 Boilerplate.</p>

    <script src="https://ajax.googleapis.com/ajax/libs/jquery/1.11.3/jquery.min.js"></script>
    <script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.3.min.
    <script src="js/plugins.js"></script>
    <script src="js/main.js"></script>

    <!-- Google Analytics: change UA-XXXXX-X to be your site's ID. -->
    <script>
      (function(b,o,i,l,e,r){b.GoogleAnalyticsObject=l;b[l]||(b[l]=
      function(){(b[l].q=b[l].q||[]).push(arguments)};b[l].l=+new Date;
      e=o.createElement(i);r=o.getElementsByTagName(i)[0];
      e.src='https://www.google-analytics.com/analytics.js';
      r.parentNode.insertBefore(e,r)}(window,document,'script','ga'));
      ga('create','UA-XXXXX-X','auto');ga('send','pageview');
    </script>
  </body>
</html>

```



<!DOCTYPE html>

<html>

<head>

<title>My First Page</title>

</head>

<body>

<h1>Hello World</h1>

<p>This is my first HTML page.</p>

</body>

</html>

Explanation

- <!DOCTYPE html> → Declares HTML5 document
 - <html> → Root element
 - <head> → Metadata (title, charset, links)
 - <title> → Browser tab title
 - <body> → Visible page content
-

HTML Tags & Elements

- **Tag:** <p>
- **Element:** <p>Hello</p>
- Most tags have **opening** and **closing** tags

<tagname>Content</tagname>

Common HTML Tags

Headings

<h1>Main Heading</h1>

<h2>Sub Heading</h2>

<h6>Smallest Heading</h6>

Paragraph

<p>This is a paragraph.</p>

Line Break & Horizontal Line

<hr>

Text Formatting Tags

`<b>Bold</b>`

`<i>Italic</i>`

`<u>Underline</u>`

`<strong>Important</strong>`


`<em>Emphasis</em>`


Links (Anchor Tag)

`<a href="https://www.google.com">Visit Google</a>`

- href → URL of the page
-

Images

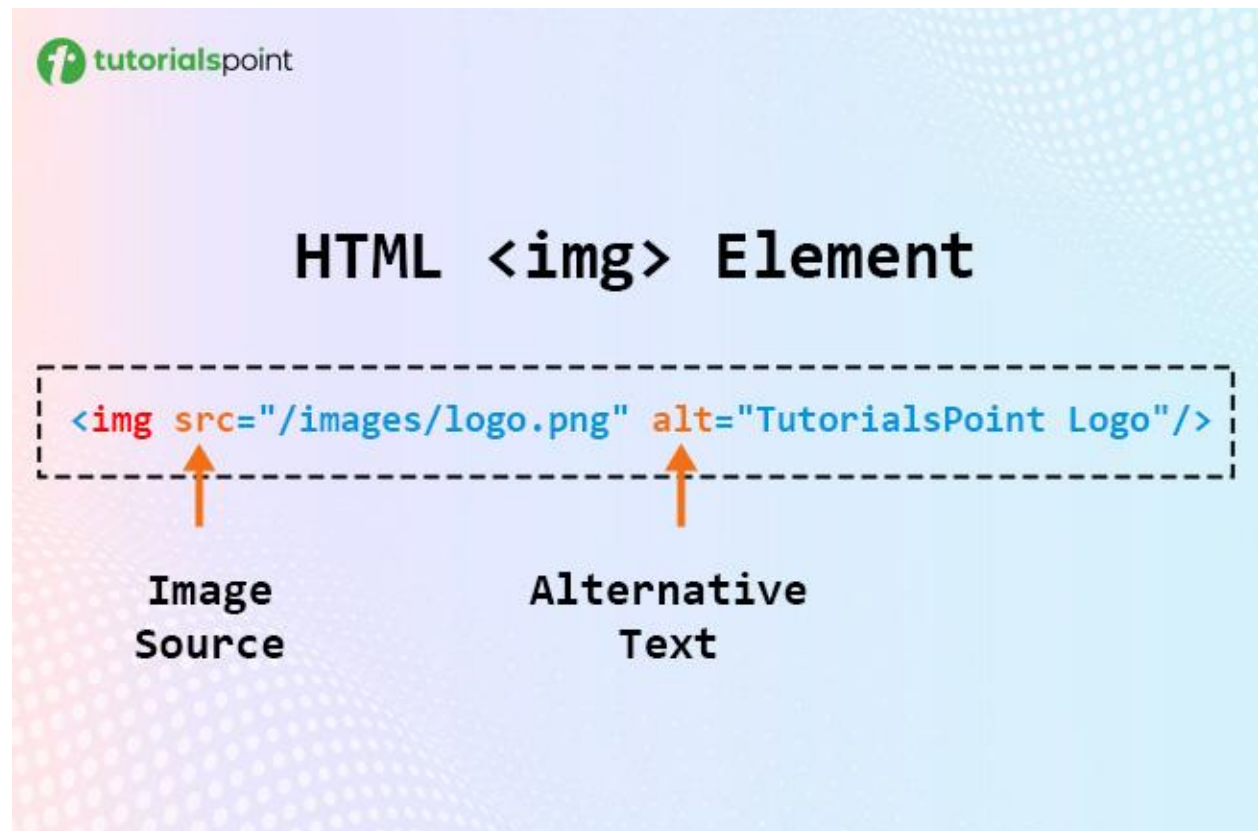

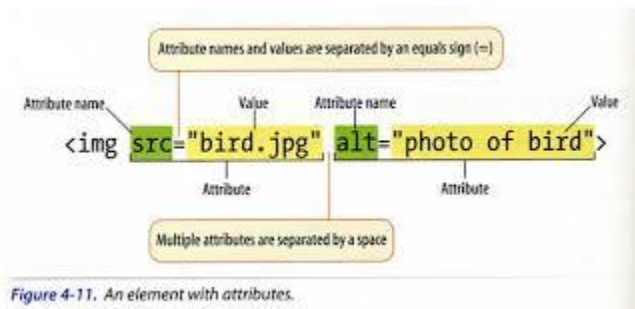

Example of Relative Paths:

```
body {
  background-image: url('../images/orange.jpg');
}
```



This is the mycss.css file.

Remember, the path is always "relative" to the file making the reference. In this case, that file is the CSS file in its own subfolder.

The solution is to use `../` to tell the browser to "go up one folder" first.

```

```

- src → Image path
- alt → Alternate text (important for accessibility)

Lists

Ordered List

```
<ol>

  <li>HTML</li>

  <li>CSS</li>

  <li>JavaScript</li>

</ol>
```

Unordered List

```
<ul>

  <li>Apple</li>

  <li>Banana</li>

</ul>
```

Tables

TABLES SYNTAX

```
<table>
  <tr>
    <td>cell 1</td>
    <td>cell 2</td>
    <td>cell 3</td>
  </tr>

  <tr>
    <td>cell 4</td>
    <td>cell 5</td>
    <td>cell 6</td>
  </tr>
</table>
```


HTML TABLES

cell 1	cell 2	cell 3
cell 4	cell 5	cell 6

<table>

<tr>	<td></td>	<td></td>	<td></td>	</tr>
<tr>	<td></td>	<td></td>	<td></td>	</tr>
<tr>	<td></td>	<td></td>	<td></td>	</tr>
<tr>	<td></td>	<td></td>	<td></td>	</tr>

</table>

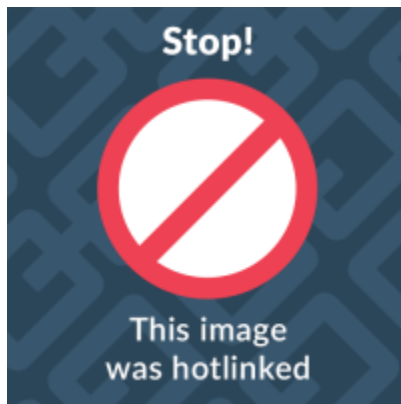

```
<table border="1">
```

```
<tr>
```

```
<th>Name</th>
```

```
<th>Age</th>
```

```
</tr>
```

```
<tr>
```

```
<td>John</td>
```

```
<td>25</td>
```

</tr>
</table>

Forms (User Input)






Name:

Sex: ☐ Male ☐ Female


Submit

HTML Input Types

<code><input type="button"></code>	
<code><input type="checkbox"></code>	
<code><input type="color"></code>	
<code><input type="date"></code>	
<code><input type="email"></code>	
<code><input type="file"></code>	
<code><input type="hidden"></code>	
<code><input type="image"></code>	
<code><input type="number"></code>	
<code><input type="password"></code>	
<code><input type="radio"></code>	
<code><input type="range"></code>	
<code><input type="reset"></code>	
<code><input type="submit"></code>	
<code><input type="text"></code>	
<code><input type="url"></code>	



Faraz
@Codewithfaraz

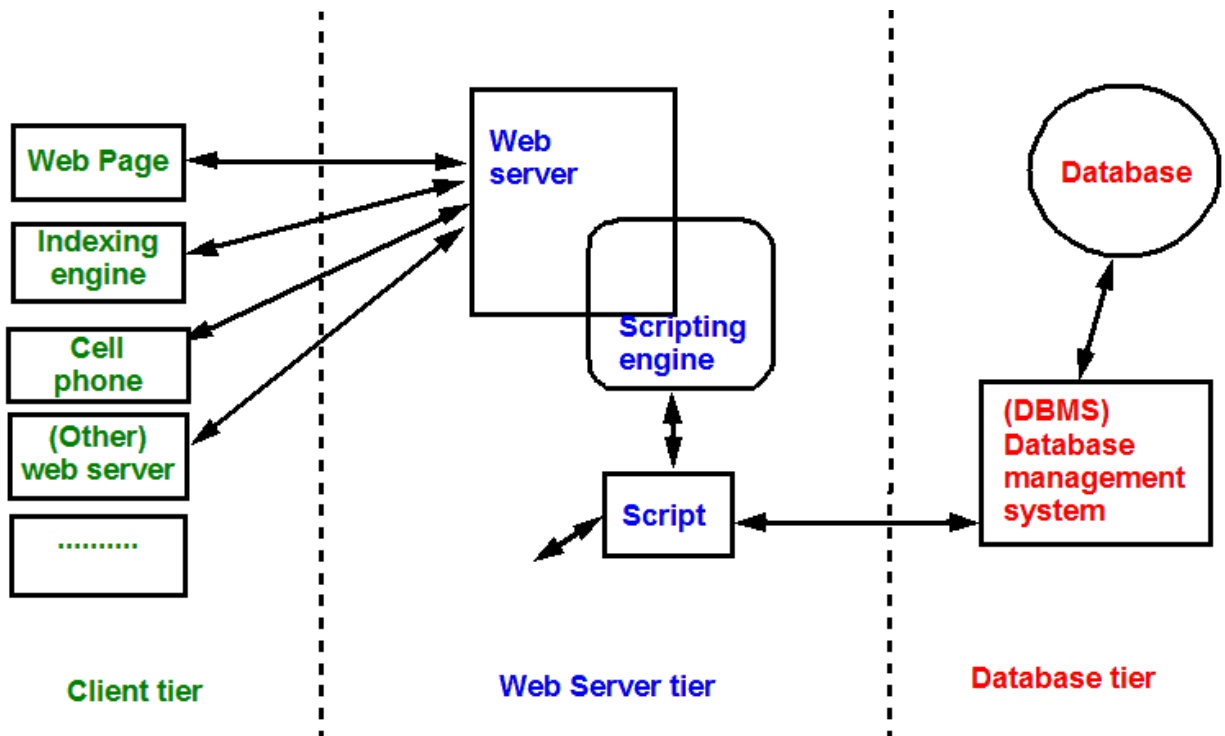

<form>

<label>Name:</label>

<input type="text">

<label>Password:</label>

<input type="password">

<input type="submit" value="Login">

</form>

Common Input Types

- text
- password
- email
- number
- radio

- checkbox
- submit

HTML Attributes

Attributes provide **additional information** about elements.

`<tag attribute="value">`

Example:

`<p style="color:red;">Red Text</p>`

Block vs Inline Elements

Block Elements (New Line)

- `<div>`
- `<p>`
- `<h1>`



Inline Elements (Same Line)

- `<span>`
- `<a>`
- `<img>`

Comments in HTML


`<!-- This is a comment -->`

Semantic HTML (Important Concept)

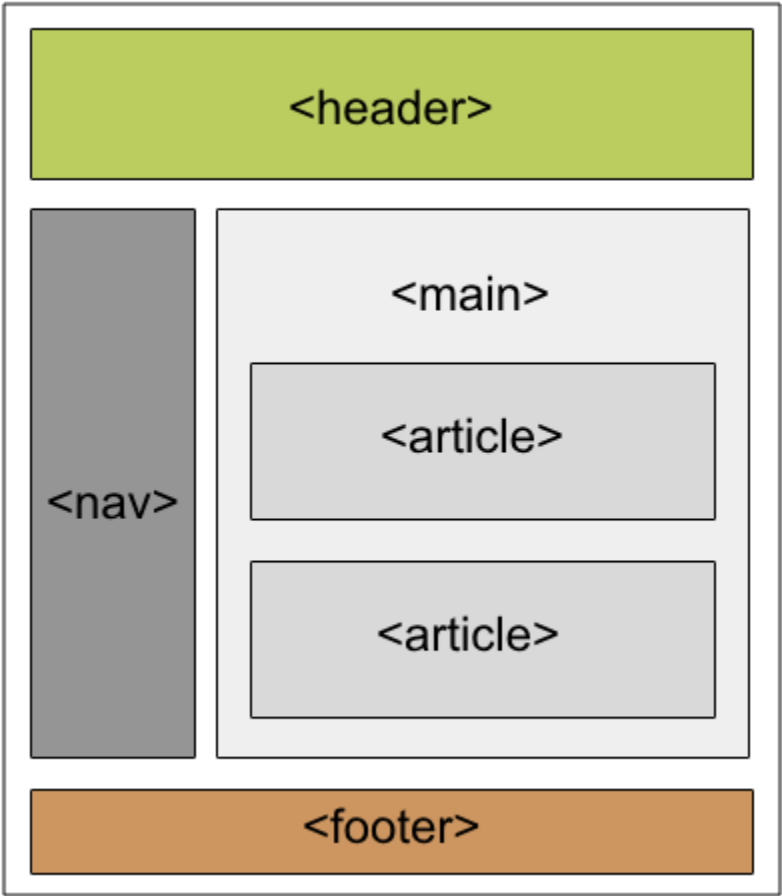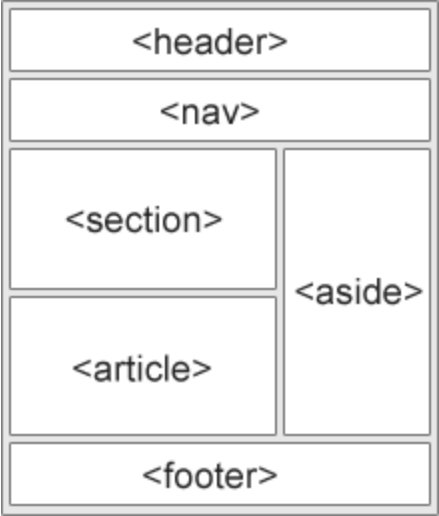


What Is Semantic HTML?

Non-Semantic HTML

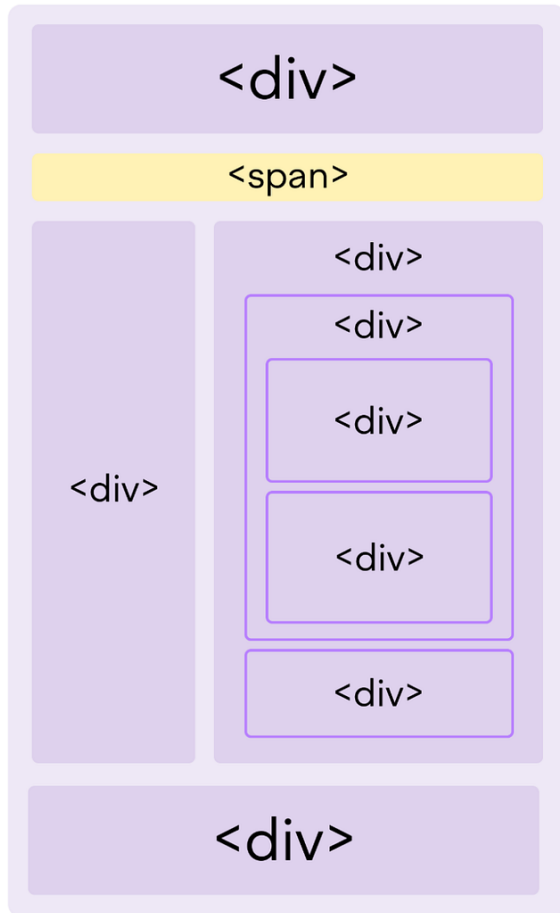

Semantic HTML

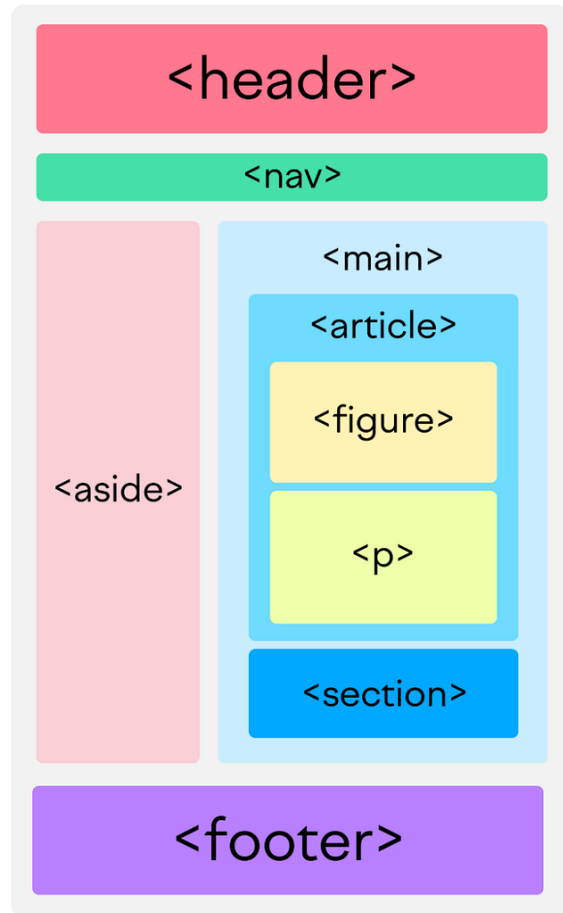

`<header>`

`<nav>`

`<main>`

`<section>`

`<article>`

`<footer>`

Benefits

- Better readability
 - SEO friendly
 - Accessibility support
-

HTML File Execution

1. Create a file: index.html
 2. Write HTML code
 3. Open file in a browser
-

Key Points to Remember

- HTML is **case-insensitive** (lowercase recommended)
- HTML handles **structure**, not styling
- Every web app starts with HTML
- Foundation for **CSS, JavaScript, Angular, React**