

---

```

%ECE458 - Senior Design
%Michael Benker
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%% FALSE DETECTION RATES %%%%%%%%%
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
clf;clear all; clc; close all;
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
samples=10000;
T_h_begin = 1.5; %Begin and end for parameter sweep of threshold
    numbers
T_h_end = 10;
T_m_begin = 4;
T_m_end = 20;
T_l_begin = 8;
T_l_end = 30;

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%%
%VARIABLES
Ave2sec = 0;      %2-second average
T_high = 4;       %standard deviations for high sensitivity setting
T_med = 8;        %standard deviations for medium sensitivity setting
T_low = 12;       %standard deviations for low sensitivity setting
Data20sec = zeros(200,1);
history = zeros(100,1);

RI_med = zeros(100,1); %1 if real interrupt, 0 if false interrupt
RI_high = zeros(100,1);
RI_low = zeros(100,1);
ID_low = zeros(100,1); %1 if interrupt detected, 0 if interrupt not
    detected
ID_med = zeros(100,1);
ID_high = zeros(100,1);
TID_low = zeros(100,1); %1 if ID = RI = 1, 0 otherwise
TID_med = zeros(100,1);
TID_high = zeros(100,1);
FD_low = zeros(100,1); %1 if ID = 1 & RI = 0, 0 otherwise
FD_med = zeros(100,1);
FD_high = zeros(100,1);
FN_low = zeros(100,1); %1 if ID = 0 & RI = 1, 0 otherwise
FN_med = zeros(100,1);
FN_high = zeros(100,1);
FDR_low = 0; %probability of false interrupt given interrupt
    detection
FDR_med = 0;
FDR_high = 0;
FDR_low_array = zeros(samples,1);
FDR_med_array = zeros(samples,1);
FDR_high_array = zeros(samples,1);

```

---

---

```

T_high_array = zeros(samples,1);      %standard deviations for high
    sensitivity setting
T_med_array = zeros(samples,1);      %standard deviations for medium
    sensitivity setting
T_low_array = zeros(samples,1);      %standard deviations for low
    sensitivity setting
FN_low_array = zeros(samples,1);
FN_med_array = zeros(samples,1);
FN_high_array = zeros(samples,1);
Opti_low = zeros(samples,1);
Opti_med = zeros(samples,1);
Opti_high = zeros(samples,1);

%IMPORT DATA
SoundData1 = 'Book5.xlsx'; %Read excel file in folder
DataMat = zeros(30,4); %Predefine Data Matrix
Ambients = xlsread(SoundData1, 'A2:A31'); %Ambient 1st col
Quiets = xlsread(SoundData1, 'B2:B31'); %Quiet is 2nd col
Mediums = xlsread(SoundData1, 'C2:C31'); %Medium is 3rd col
Louds = xlsread(SoundData1, 'D2:D31'); %Loud is 4th col
[k,DataLoc] = xlsread(SoundData1, 'E1:E1');

%Define past 20 seconds (ambients)

for s=1:samples
    T_high=T_h_begin+s*(T_h_end-T_h_begin)/samples;
    T_med=T_m_begin+s*(T_m_end-T_m_begin)/samples;
    T_low=T_l_begin+s*(T_l_end-T_l_begin)/samples;

    T_high_array(s,1)=T_high;
    T_med_array(s,1)=T_med;
    T_low_array(s,1)=T_low;

    RI_med = zeros(100,1); %1 if real interrupt, 0 if false interrupt
    RI_high = zeros(100,1);
    RI_low = zeros(100,1);
    ID_low = zeros(100,1); %1 if interrupt detected, 0 if interrupt
    not detected
    ID_med = zeros(100,1);
    ID_high = zeros(100,1);
    TID_low = zeros(100,1); %1 if ID = RI = 1, 0 otherwise
    TID_med = zeros(100,1);
    TID_high = zeros(100,1);
    FD_low = zeros(100,1); %1 if ID = 1 & RI = 0, 0 otherwise
    FD_med = zeros(100,1);
    FD_high = zeros(100,1);
    FN_low = zeros(100,1); %1 if ID = 0 & RI = 1, 0 otherwise
    FN_med = zeros(100,1);
    FN_high = zeros(100,1);

```

---

---

```

for c =1:200
    Data20sec(c,1) = Ambients(randi([1 30],1,1),1);

end
Ave20sec = mean(Data20sec);
Std20sec = std(Data20sec);
RT_high = Ave20sec+Std20sec*T_high; %Running threshold level (high
    sens)
RT_med = Ave20sec+Std20sec*T_med; %Running threshold level (med sens)
RT_low = Ave20sec+Std20sec*T_low; %Running threshold level (low sens)

for c=1:25
    new = Ambients(randi([1 30],1,1),1);
    history(c,1)=new;

    if new>RT_high
        ID_high(c,1)=1;
        FD_high(c,1)=1;
    end
    if new>RT_med
        ID_med(c,1)=1;
        FD_med(c,1)=1;
    end
    if new>RT_low
        ID_low(c,1)=1;
        FD_low(c,1)=1;
    end

end

%Quiet interrupts
%Only high sensitivity should activate interrupt
for c=26:50
    new = Quiets(randi([1 30],1,1),1);
    history(c,1)=new;
    RI_high(c,1)=1;
    if new>RT_high
        ID_high(c,1)=1;
        TID_high(c,1)=1;
    else
        FN_high(c,1)=1;
    end
    if new>RT_med
        ID_med(c,1)=1;
        FD_med(c,1)=1;
    end
    if new>RT_low
        ID_low(c,1)=1;
        FD_low(c,1)=1;
    end

end

end

```

---

---

```
%medium interrupts
%Only high and medium sensitivity should activate interrupt
```

```
for c=51:75
    new = Mediums(randi([1 30],1,1),1);
    history(c,1)=new;
    RI_high(c,1)=1;
    RI_med(c,1)=1;
    if new>RT_high
        ID_high(c,1)=1;
        TID_high(c,1)=1;
    else
        FN_high(c,1)=1;
    end
    if new>RT_med
        ID_med(c,1)=1;
        TID_med(c,1)=1;
    else
        FN_med(c,1)=1;
    end
    if new>RT_low
        ID_low(c,1)=1;
        FD_low(c,1)=1;
    end
end

end
```

```
%loud interrupts
%all activate interrupt
for c=76:100
    new = Louds(randi([1 30],1,1),1);
    history(c,1)=new;
    RI_high(c,1)=1;
    RI_med(c,1)=1;
    RI_low(c,1)=1;
    if new>RT_high
        ID_high(c,1)=1;
        TID_high(c,1)=1;
    else
        FN_high(c,1)=1;
    end
    if new>RT_med
        ID_med(c,1)=1;
        TID_med(c,1)=1;
    else
        FN_med(c,1)=1;
    end
    if new>RT_low
        ID_low(c,1)=1;
        TID_low(c,1)=1;
    else
        FN_low(c,1)=1;
    end
end
```

---

```

        end

    end

    %False Interrupt Detection Rate - Print all
    %FDR_low = sum(FD_low, 'all')/sum(ID_low, 'all');    %probability of
        false interrupt given interrupt detection
    %FDR_med = sum(FD_med, 'all')/sum(ID_med, 'all');
    %FDR_high = sum(FD_high, 'all')/sum(ID_high, 'all');
    FDR_low = sum(FD_low, 'all')/sum(ID_low, 'all');    %probability of
        false interrupt given interrupt detection
    FDR_med = sum(FD_med, 'all')/sum(ID_med, 'all');
    FDR_high = sum(FD_high, 'all')/sum(ID_high, 'all');

    FDR_low_array(s,1) = FDR_low;
    FDR_med_array(s,1) = FDR_med;
    FDR_high_array(s,1) = FDR_high;

    FN_low_array(s,1)=sum(FN_low, 'all')/100;
    FN_med_array(s,1)=sum(FN_med, 'all')/100;
    FN_high_array(s,1)=sum(FN_high, 'all')/100;

    Opti_low(s,1)= FDR_low_array(s,1)+FN_low_array(s,1);
    Opti_med(s,1)=FDR_med_array(s,1)+FN_med_array(s,1);
    Opti_high(s,1)=FDR_high_array(s,1)+FN_high_array(s,1);

    end

    %!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

    FDRfit_high =
        fit( T_high_array,FDR_high_array, 'poly3','normalize','on');
    FNfit_high = fit( T_high_array,
        FN_high_array,'poly3','normalize','on');

    FDRfit_med = fit( T_med_array,
        FDR_med_array,'poly3','normalize','on');
    FNfit_med = fit( T_med_array, FN_med_array,'poly3','normalize','on');

    FDRfit_low = fit( T_low_array,FDR_low_array,'poly3','normalize','on'
        );
    FNfit_low = fit( T_low_array,FN_low_array,'poly3','normalize','on' );

    DataLoc = char(DataLoc);
    figure(1)
    subplot(2,1,1)
    plot(FDRfit_low,T_low_array,FDR_low_array)
    title('False Detection Rate: Low Sensitivity, %s')
    xlabel('# of Threshold Standard Deviations, T')
    ylabel('FDR')
    grid on
    subplot(2,1,2)

```

---

---

```

plot(FNfit_low,T_low_array,FN_low_array)
title('False Negatives: Low Sensitivity,')
xlabel('# of Threshold Standard Deviations, T')
ylabel('FN')
suptitle(DataLoc)
grid on

figure(2)
subplot(2,1,1)
plot(FDRfit_med,T_med_array,FDR_med_array)
title('False Detection Rate: Medium Sensitivity,')
xlabel('# of Threshold Standard Deviations, T')
ylabel('FDR')
grid on
subplot(2,1,2)
plot(FNfit_med,T_med_array,FN_med_array)
title('False Negatives: Medium Sensitivity,')
xlabel('# of Threshold Standard Deviations, T')
ylabel('FN/100')
suptitle(DataLoc)
grid on

figure(3)
subplot(2,1,1)
plot(FDRfit_high,T_high_array,FDR_high_array)
title('False Detection Rate: High Sensitivity,')
xlabel('# of Threshold Standard Deviations, T')
ylabel('FDR')
grid on
subplot(2,1,2)
plot(FNfit_high,T_high_array,FN_high_array)
title('False Negatives: High Sensitivity,')
xlabel('# of Threshold Standard Deviations, T')
ylabel('FN/100')
suptitle(DataLoc)
grid on

fit_high = fit( T_high_array,Opti_high, 'poly3','normalize','on');
fit_med = fit( T_med_array, Opti_med,'poly3','normalize','on');
fit_low = fit( T_low_array,Opti_low,'poly3','normalize','on' );

figure(4)
subplot(3,1,1)
plot(fit_high,T_high_array,Opti_high)
%fit_high( 0.01 );
title('FDR+False Negatives: High Sensitivity,')
xlabel('Threshold stdev')
ylabel('Pr')
grid on

subplot(3,1,2)
plot(fit_med, T_med_array,Opti_med)

```

---


```

%fit_med( 0.01 );
title('FDR+False Negatives: Med Sensitivity,')
xlabel('Threshold stdev')
ylabel('Pr')
grid on


subplot(3,1,3)
plot(fit_low,T_low_array,Opti_low)
%fit_low( 0.01 );
title('FDR+False Negatives: Low Sensitivity, ')
xlabel('Threshold stdev')
ylabel('Pr')
suptitle(DataLoc)
grid on

```


RF Photonics Lab @ 4:20 PM 10/24/19

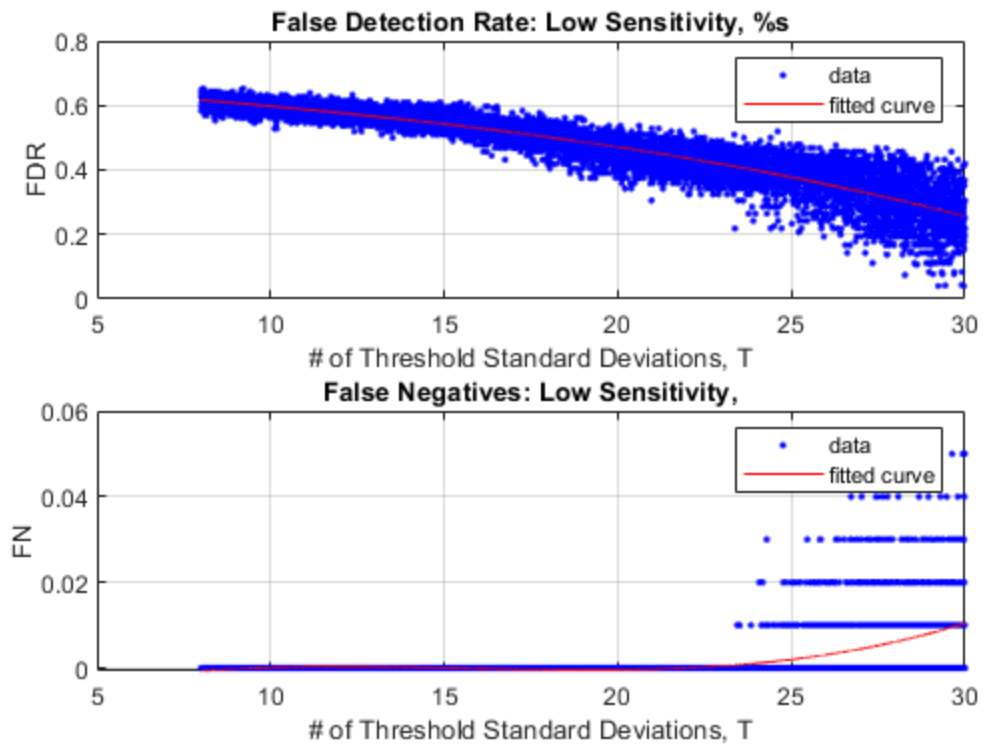

RF Photonics Lab @ 4:20 PM 10/24/19

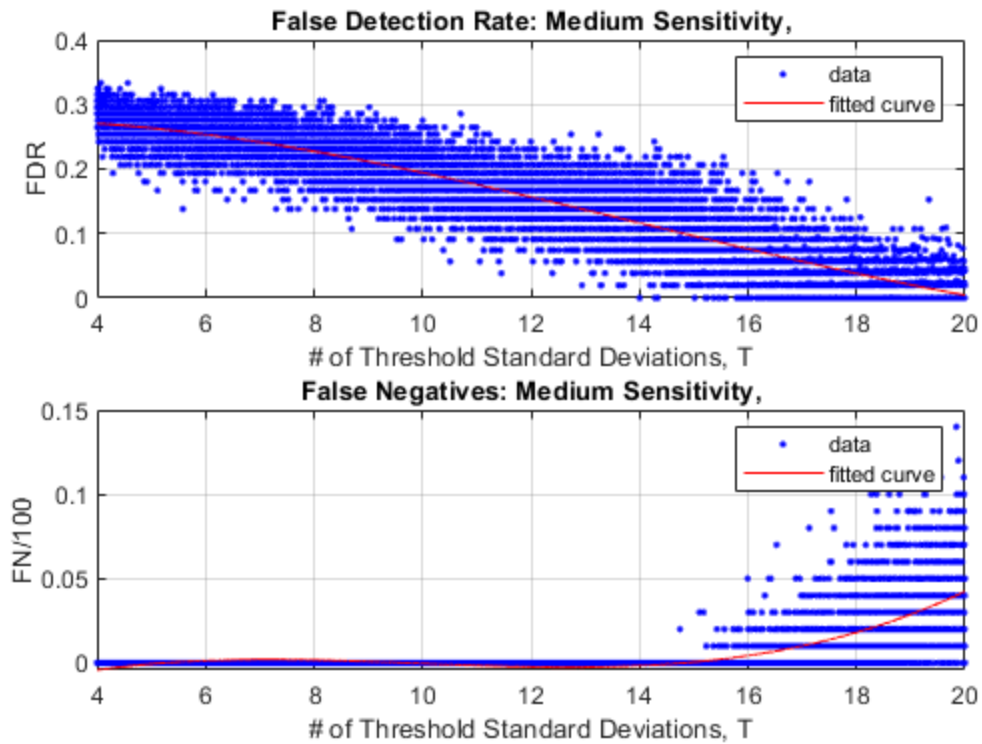


RF Photonics Lab @ 4:20 PM 10/24/19

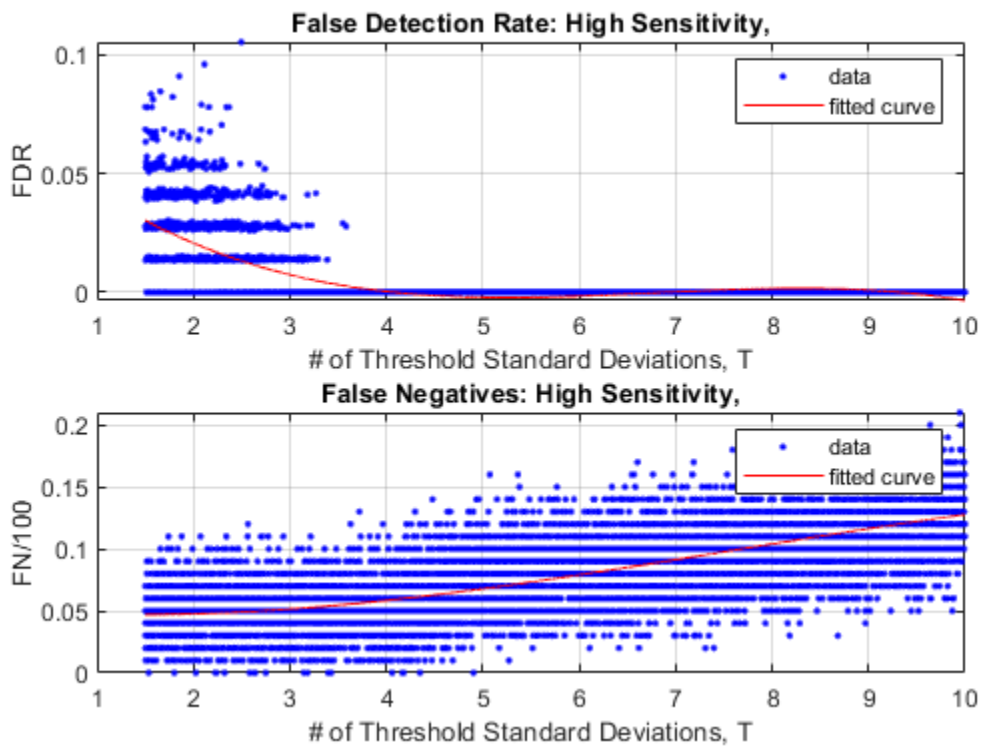



---

RF Photonics Lab @ 4:20 PM 10/24/19

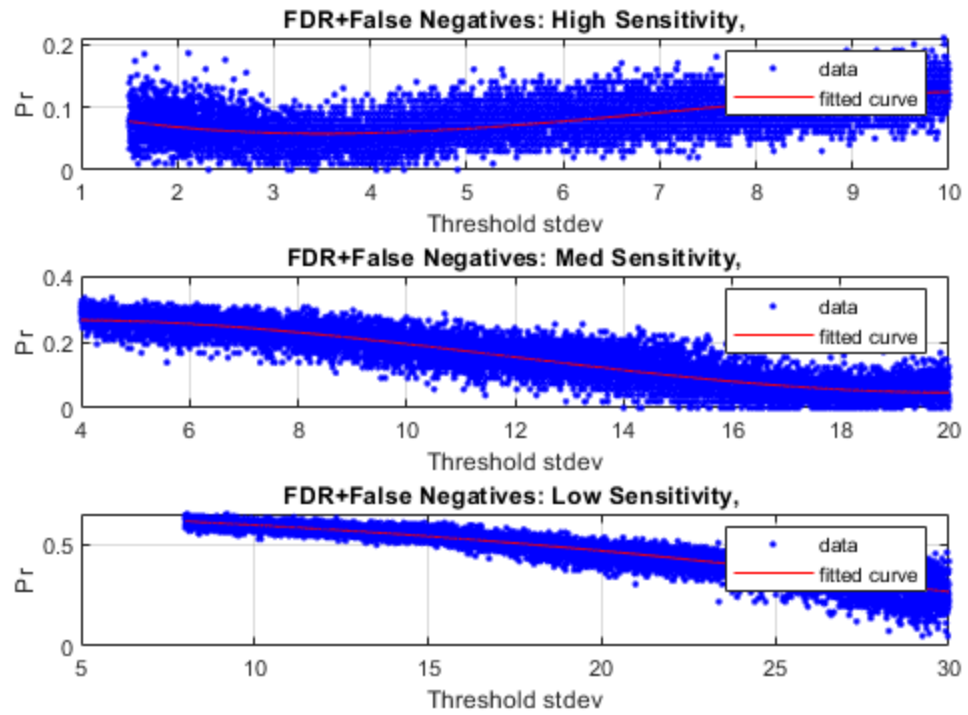

*Published with MATLAB® R2019b*