





















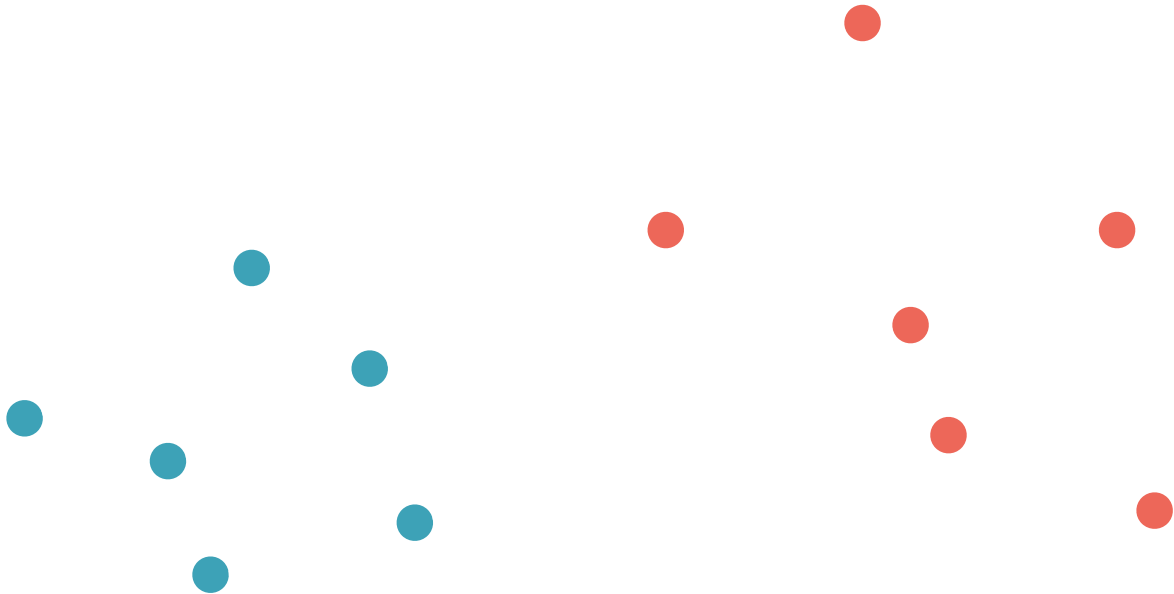




# Last Time

- Intuition of OT: find “best” explanation for the difference between datasets

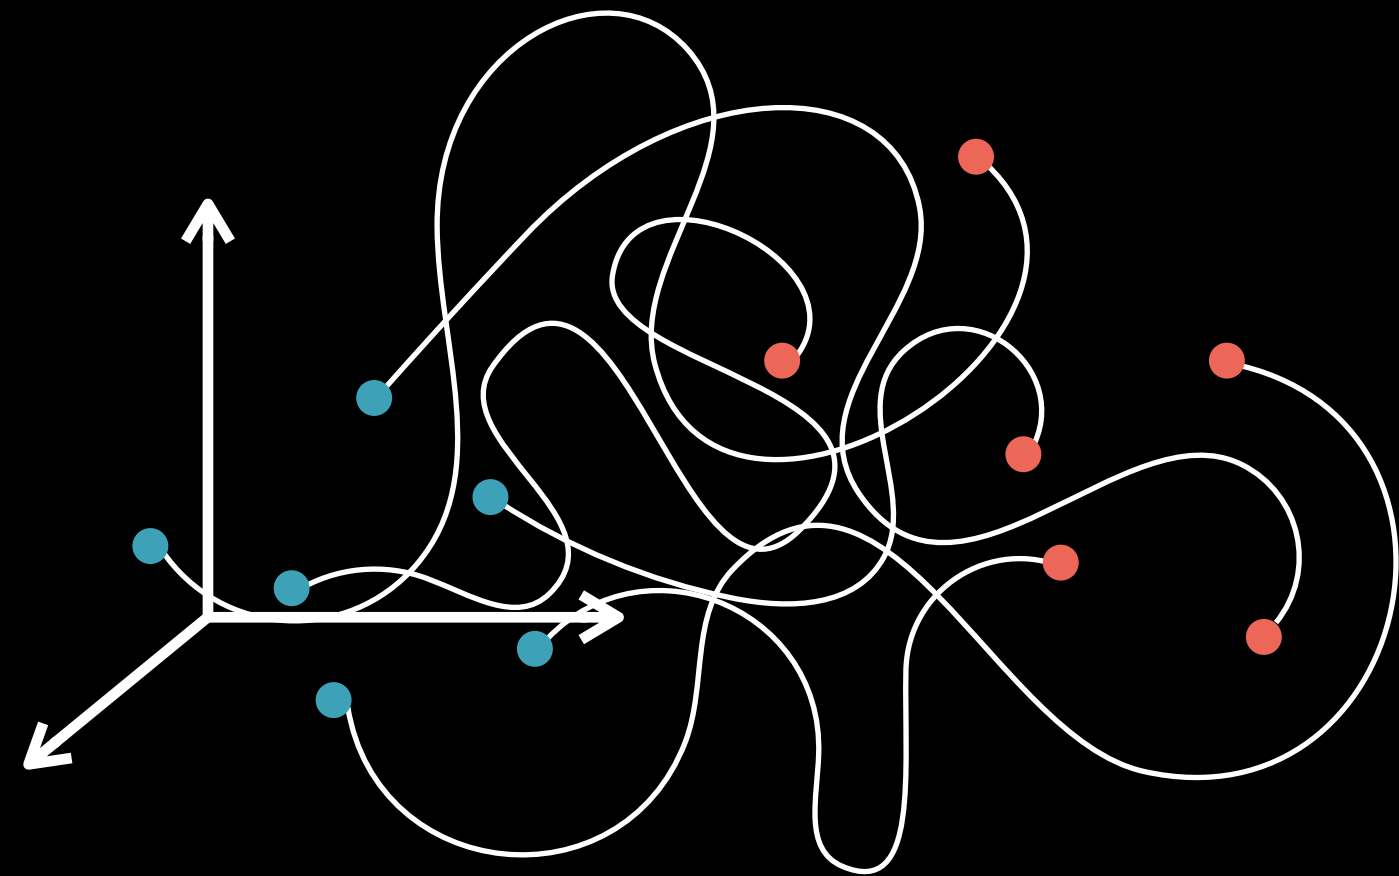

Vs

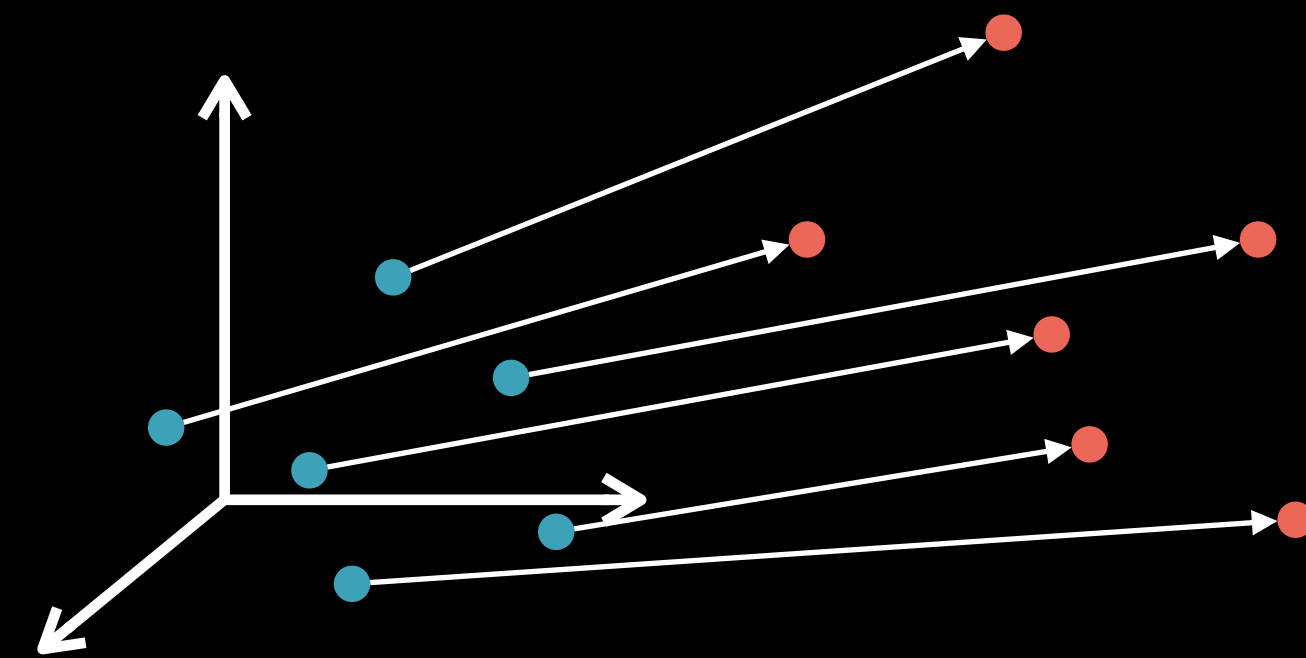

- Hungarian algo finds best matching (i.e. solves discrete OT), **but:**
  - Is not ML friendly
  - Hard-matching is restrictive
- We need to go beyond hard matchings to make OT useful for ML

# Today

- **Measures:** a formal, general way to handle data of various kinds
- **Push-forwards:** generalizing the notion of correspondence/matching
- **Monge Formulation:** discrete (=assignment) and continuous (=mapping)
- **Brenier's Theorem:** Simple conditions that guarantee solution to Monge