






Time  $t=0$ ,  $F(\rho_t)=67.77$

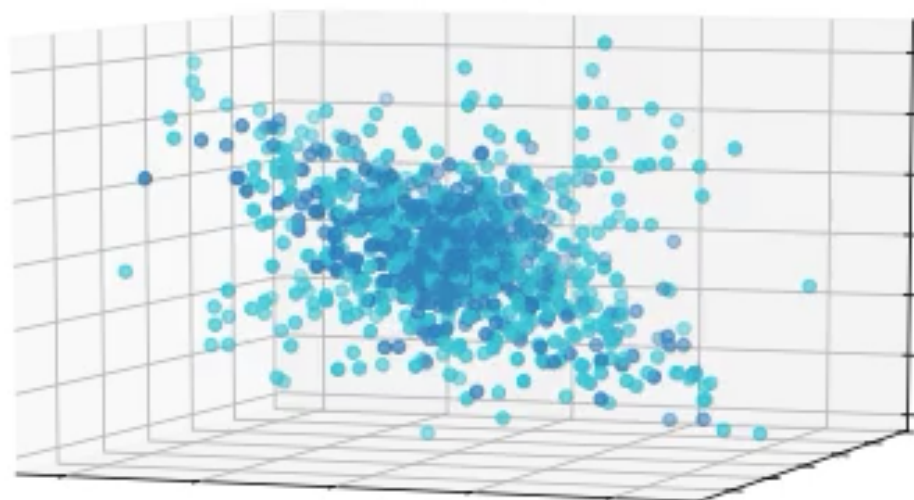

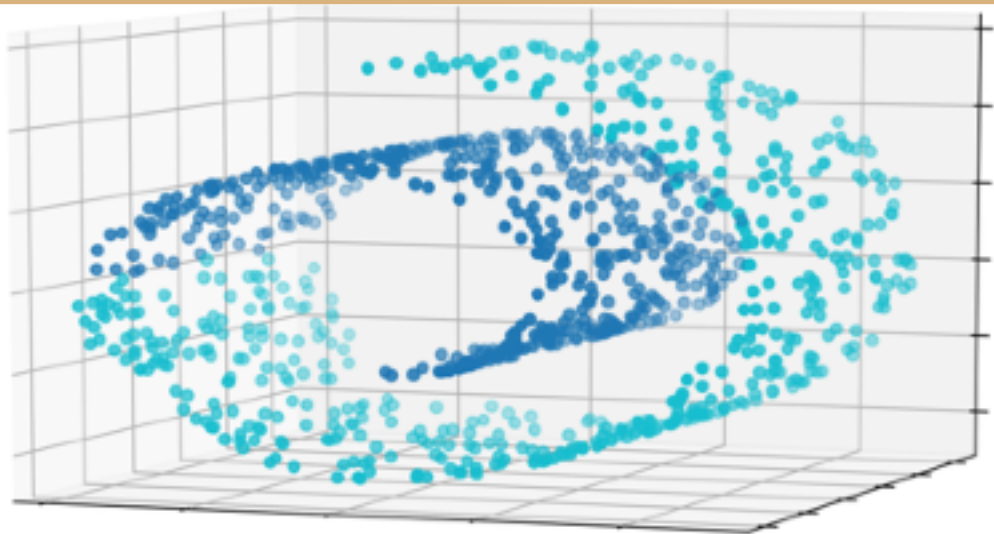


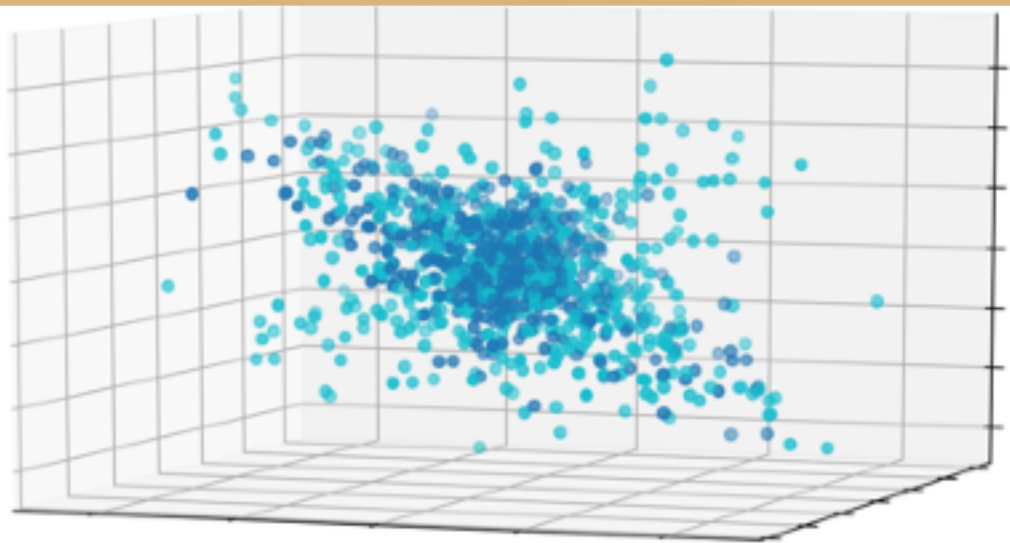






Time  $t=0$ ,  $F(\rho_t)=67.77$

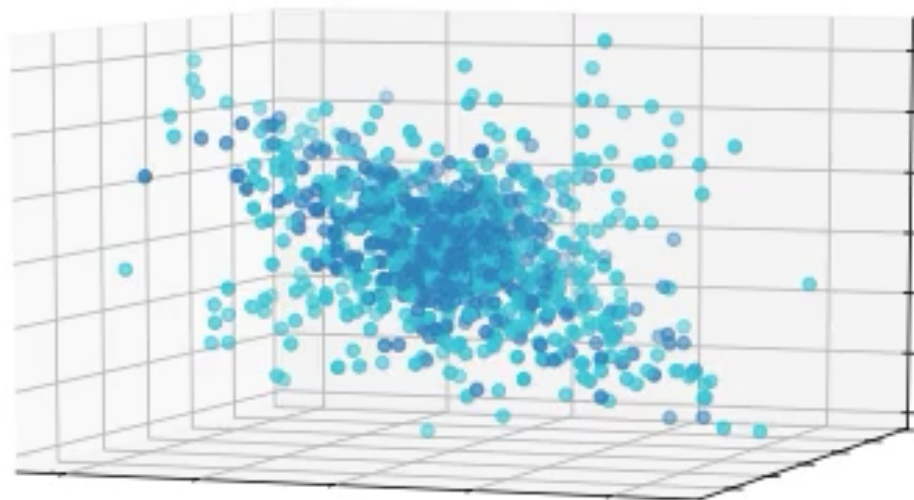

Time  $t=0$ ,  $F(\rho_t)=67.77$

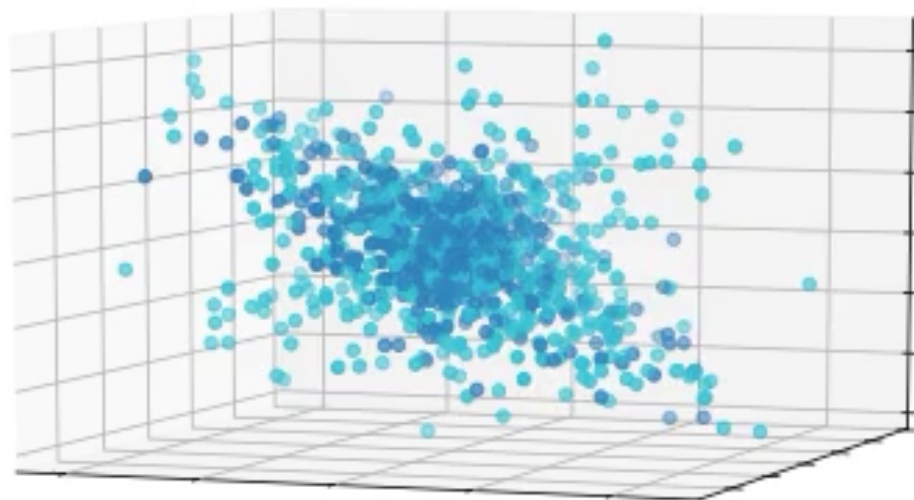













Want:  $\rho^*$  but linearly separable


































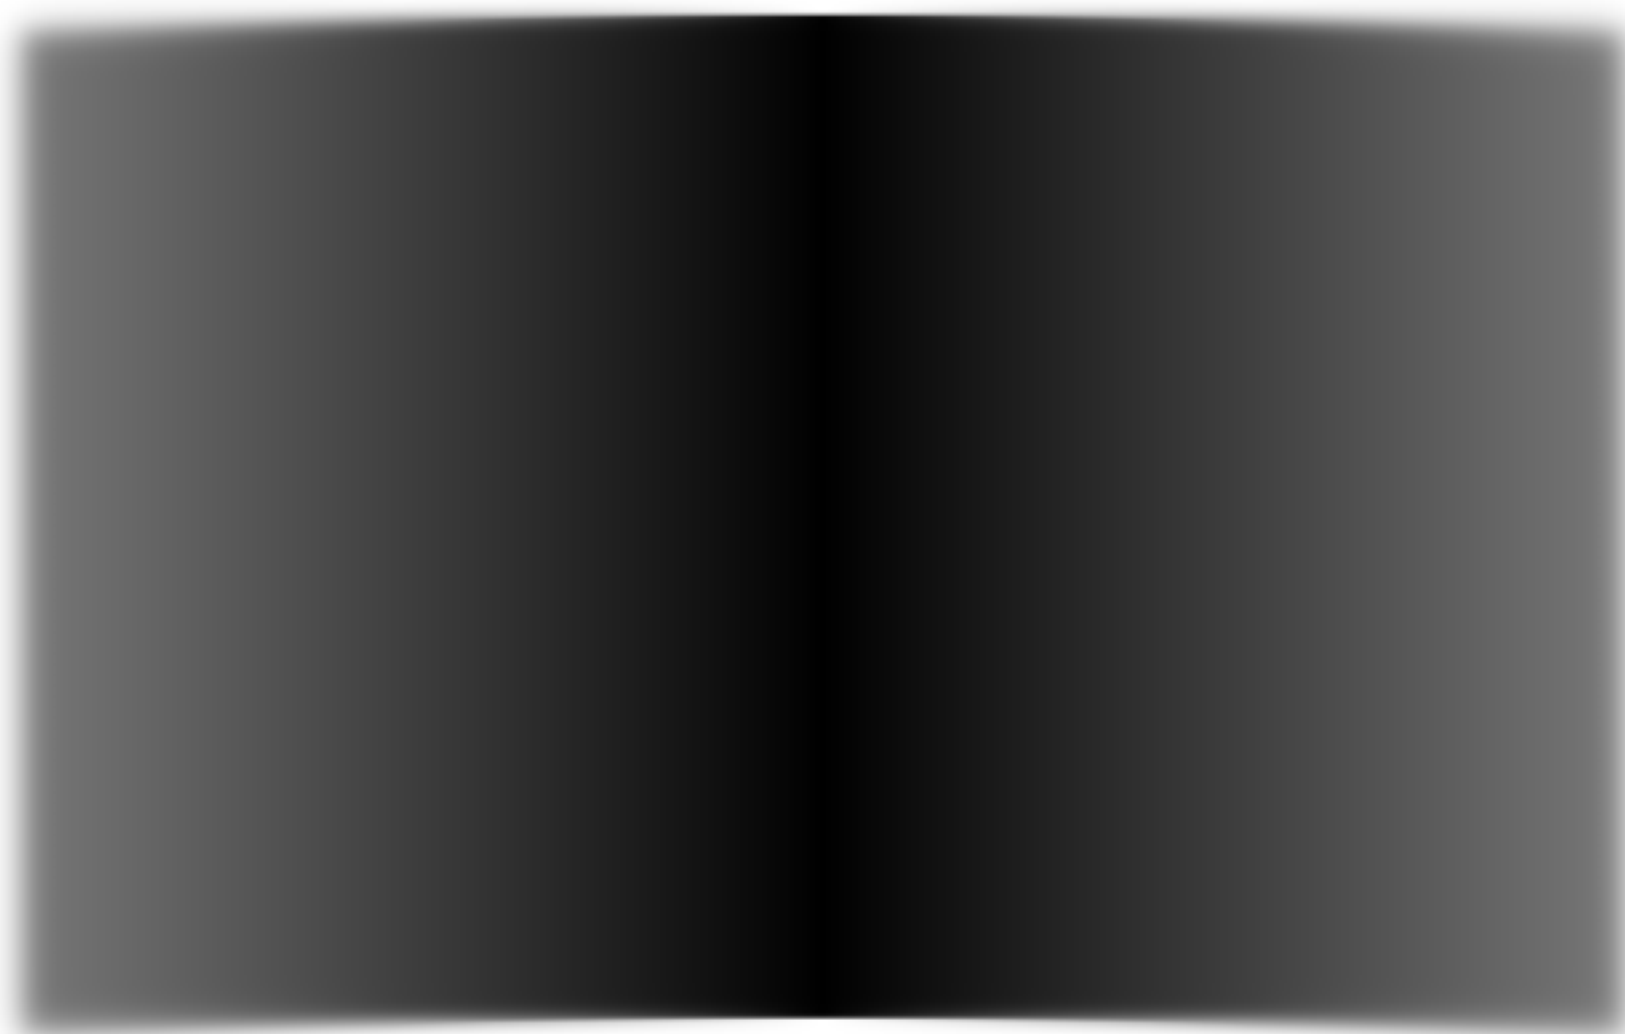



Time  $t=0$ ,  $F(\rho_t)=67.77$

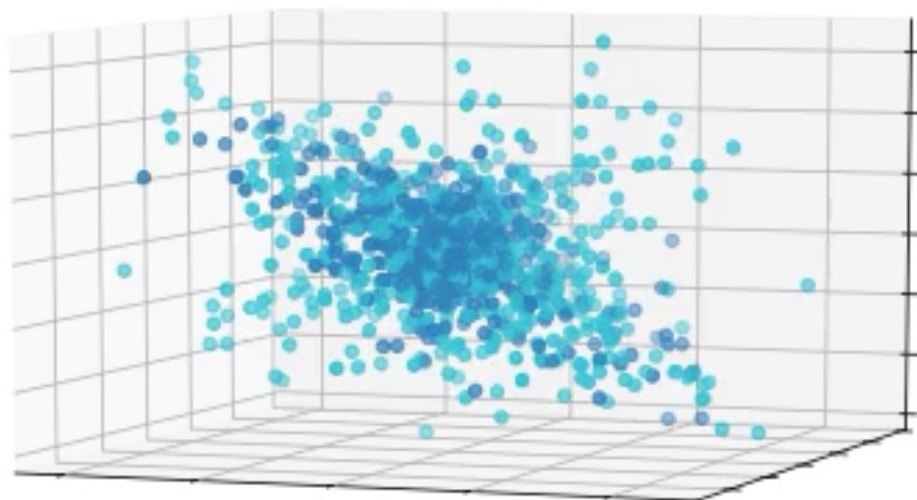


Time  $t=0$ ,  $F(\rho_t)=67.77$

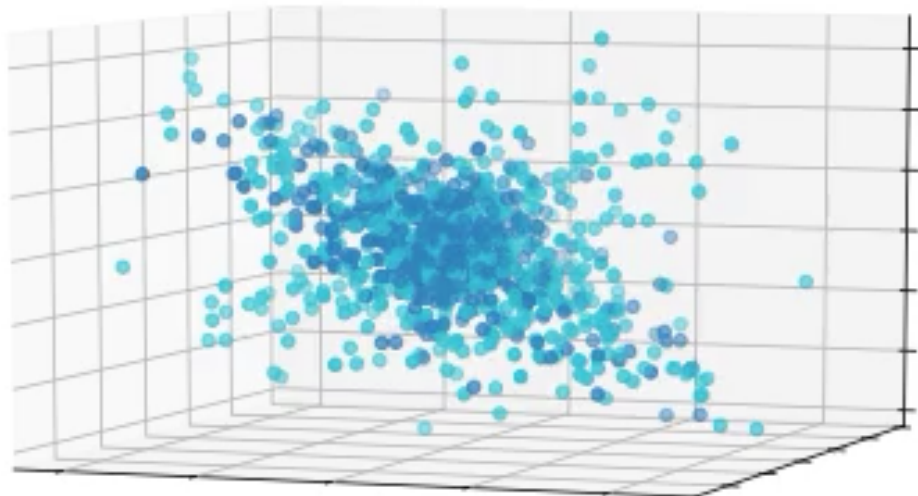



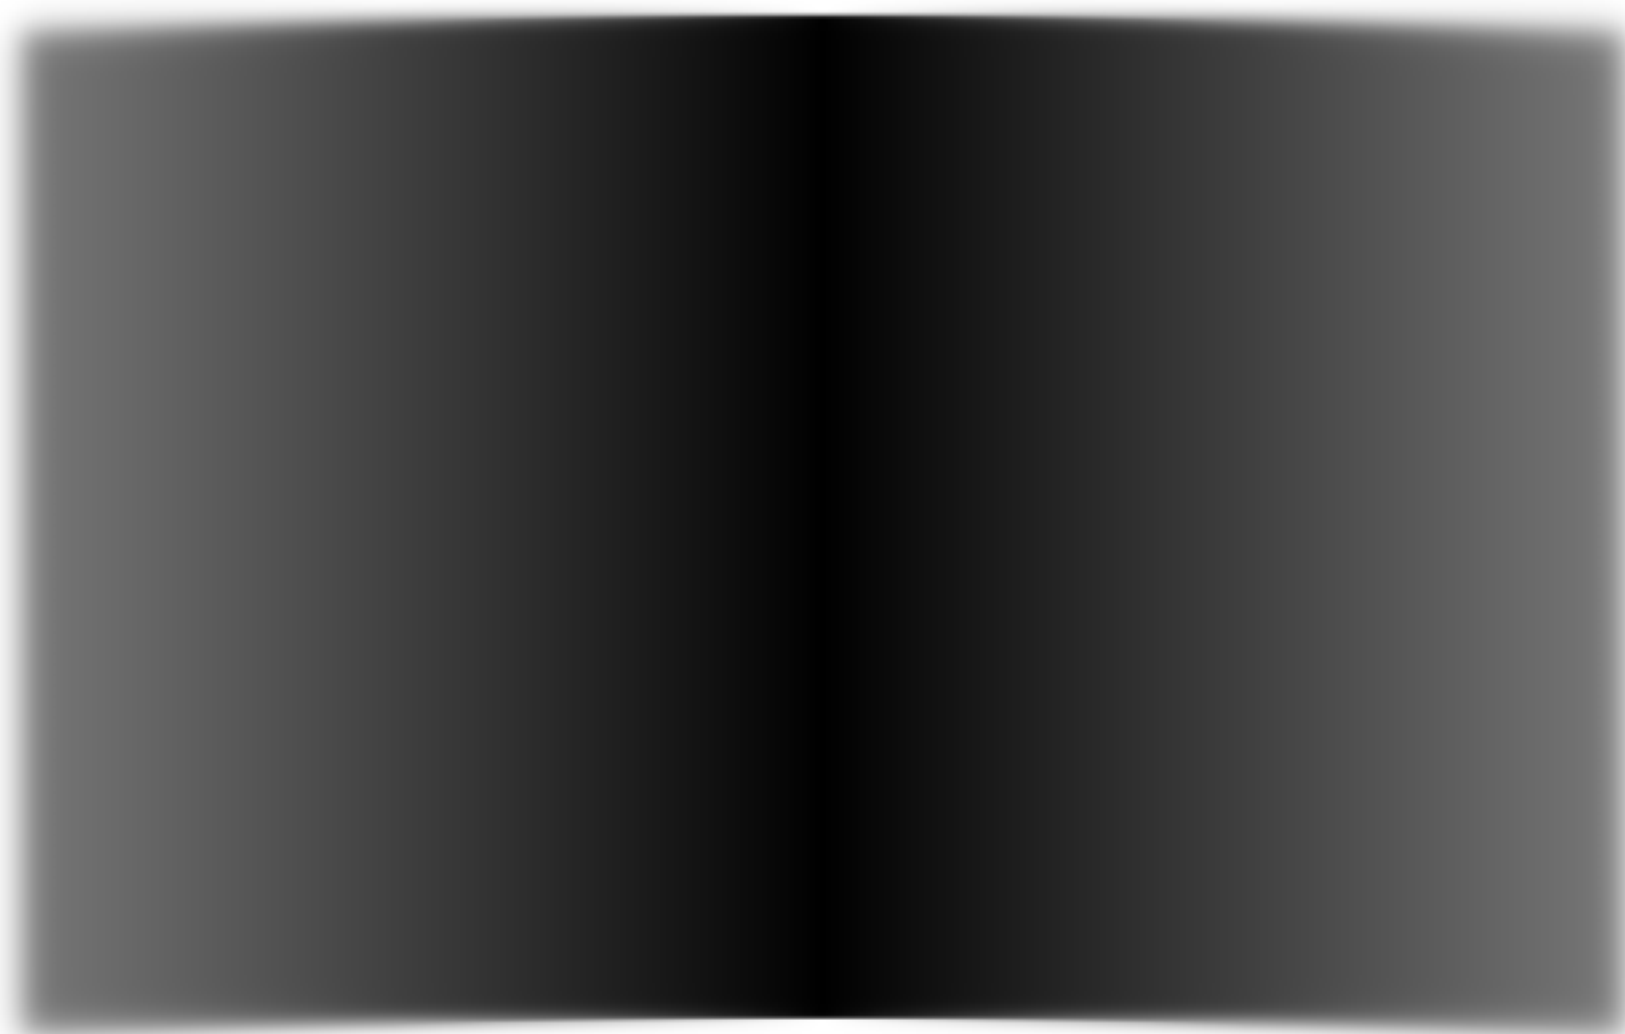


Time  $t=0$ ,  $F(\rho_t)=67.77$

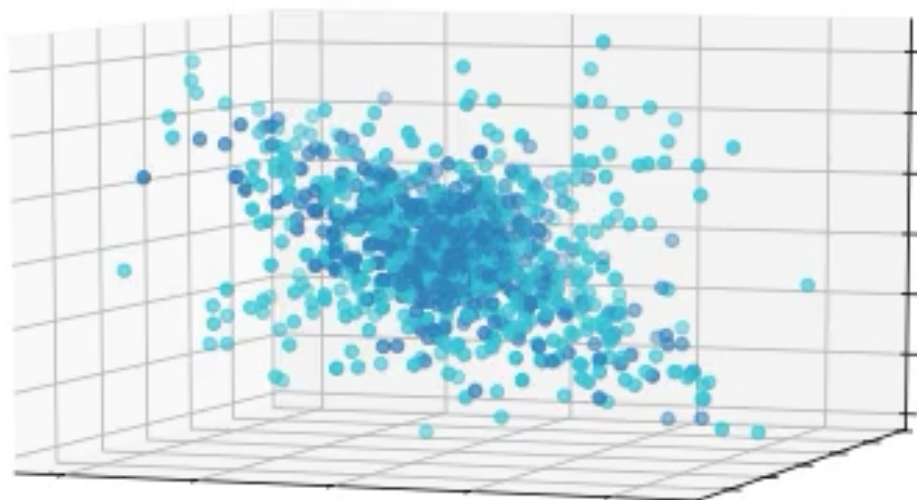





Time  $t=0$ ,  $F(\rho_t)=67.77$

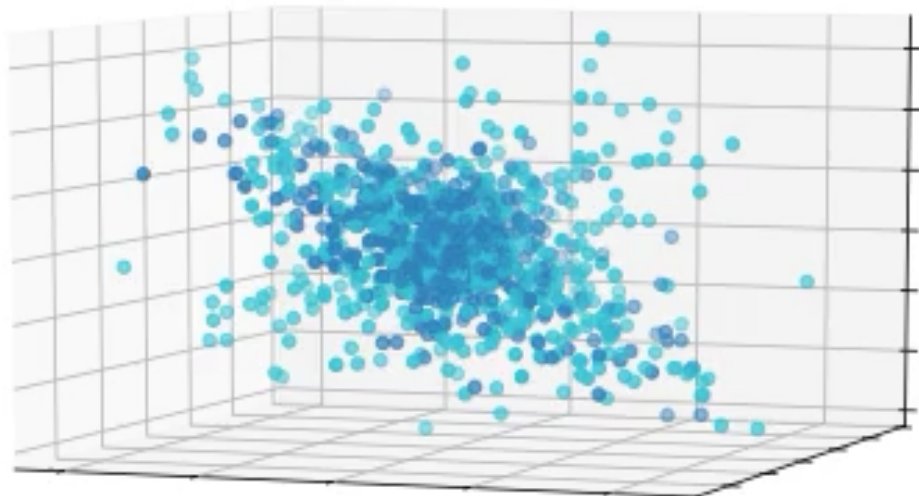




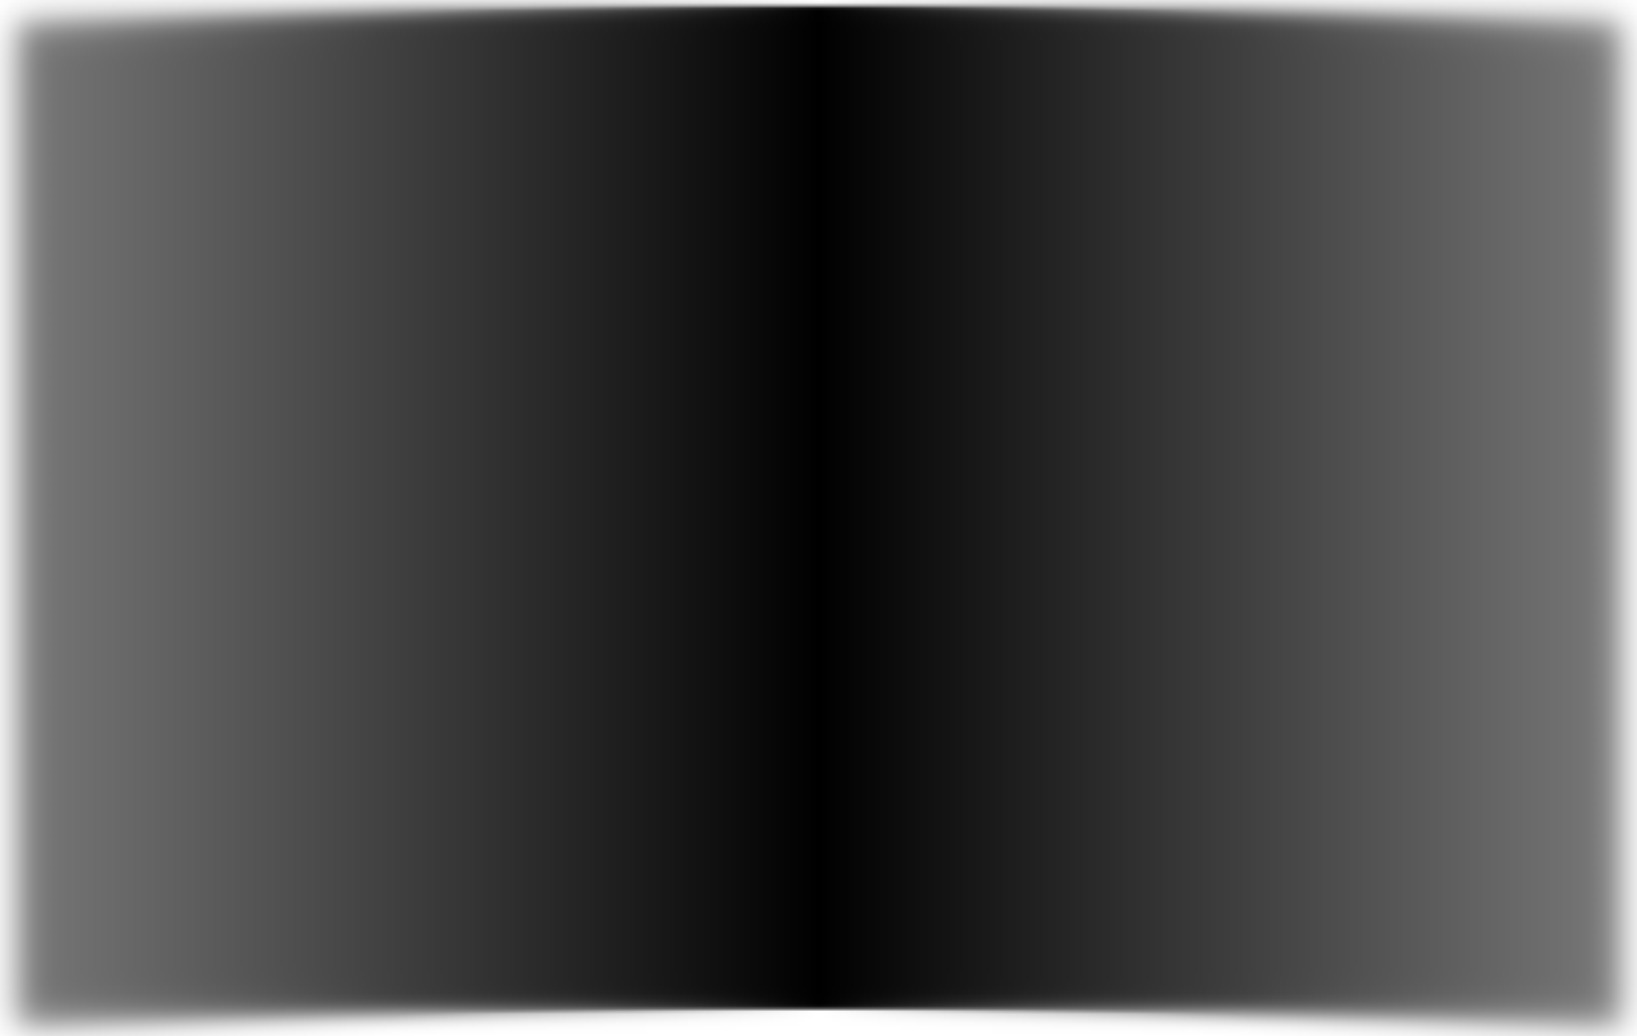


Time  $t=0$ ,  $F(\rho_t)=67.77$

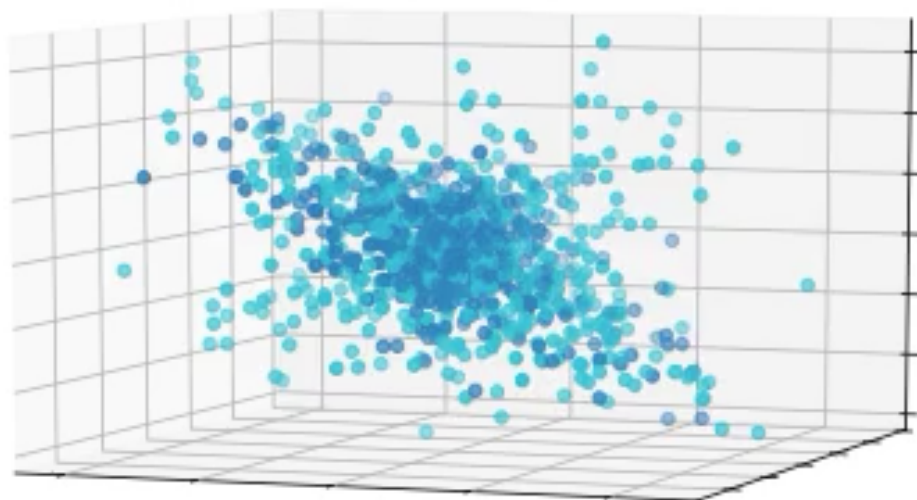


Time  $t=0$ ,  $F(\rho_t)=67.77$

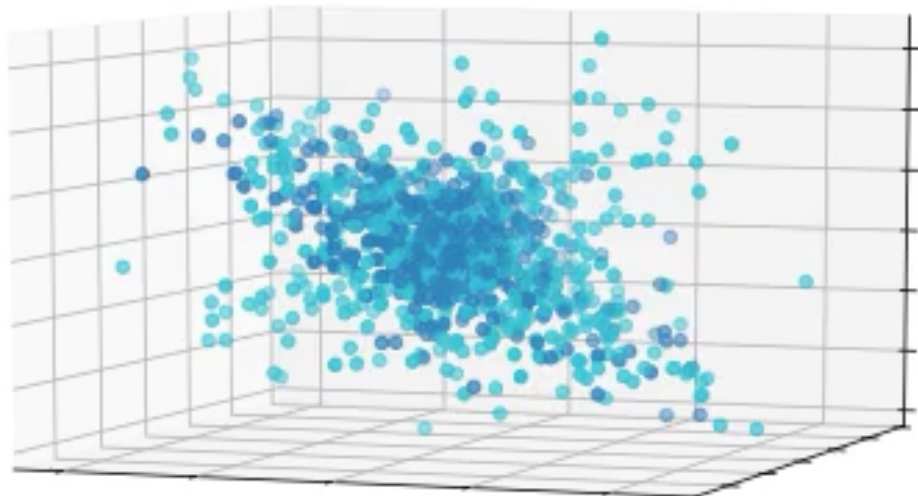




# Application: Dataset 'Shaping'

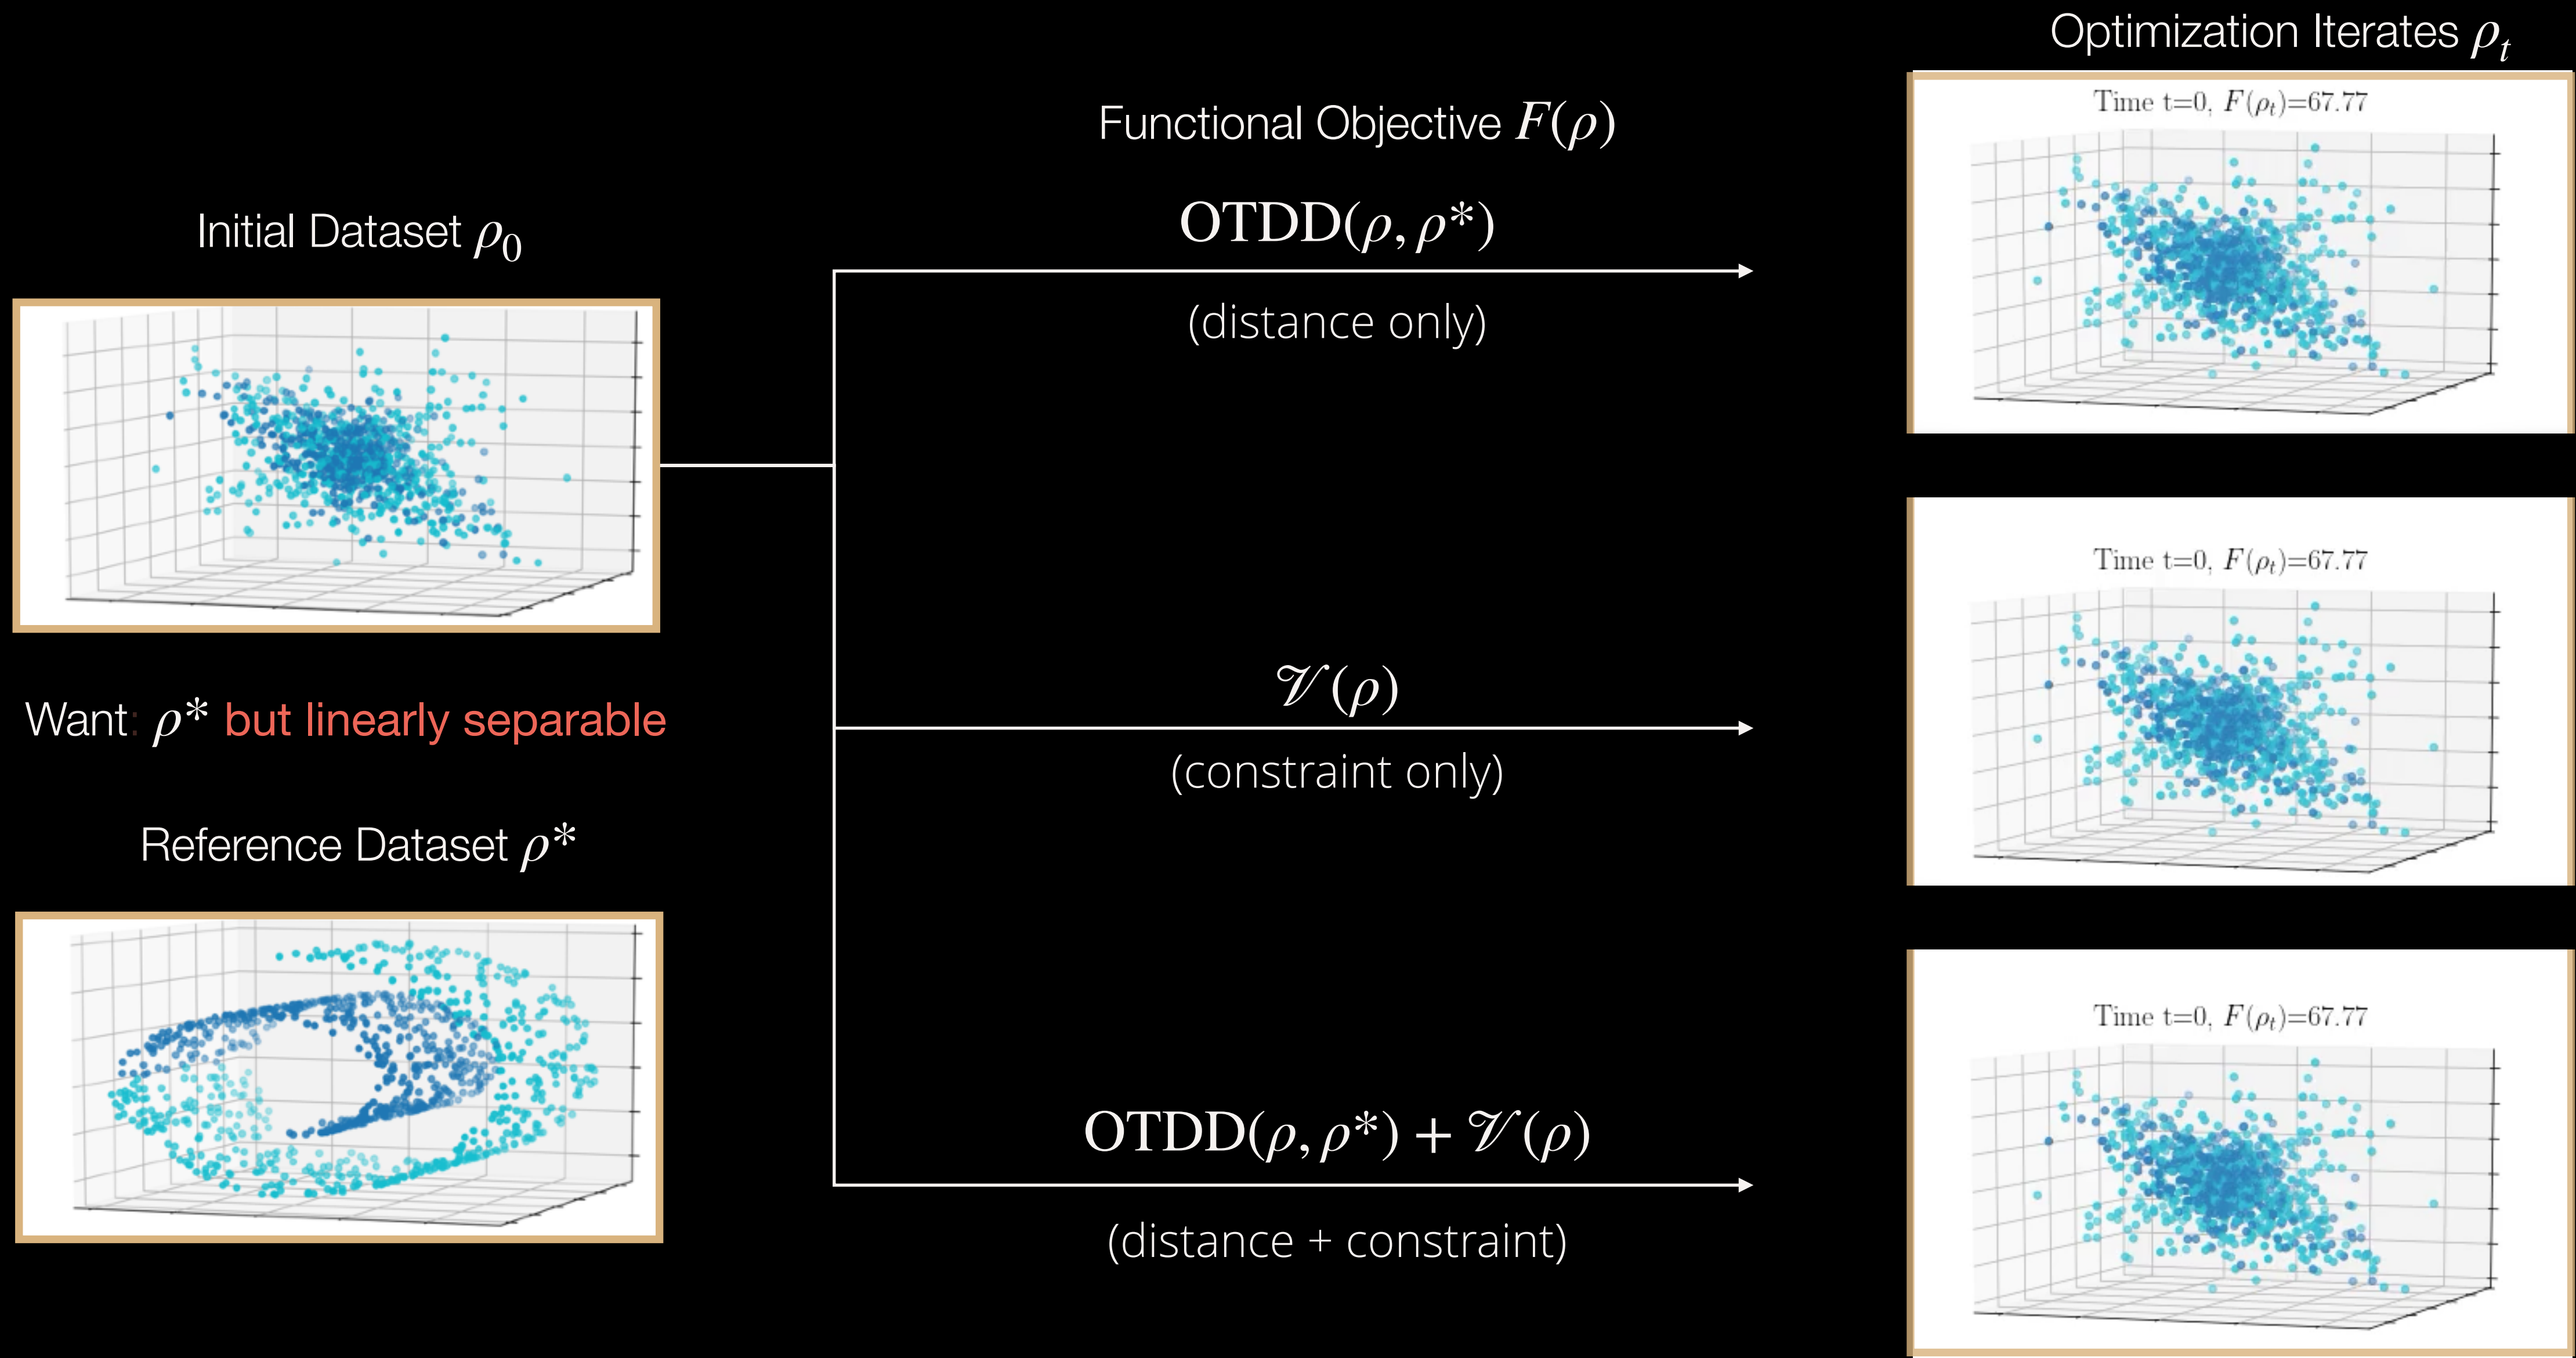





# Application: Data-Driven Transfer Learning

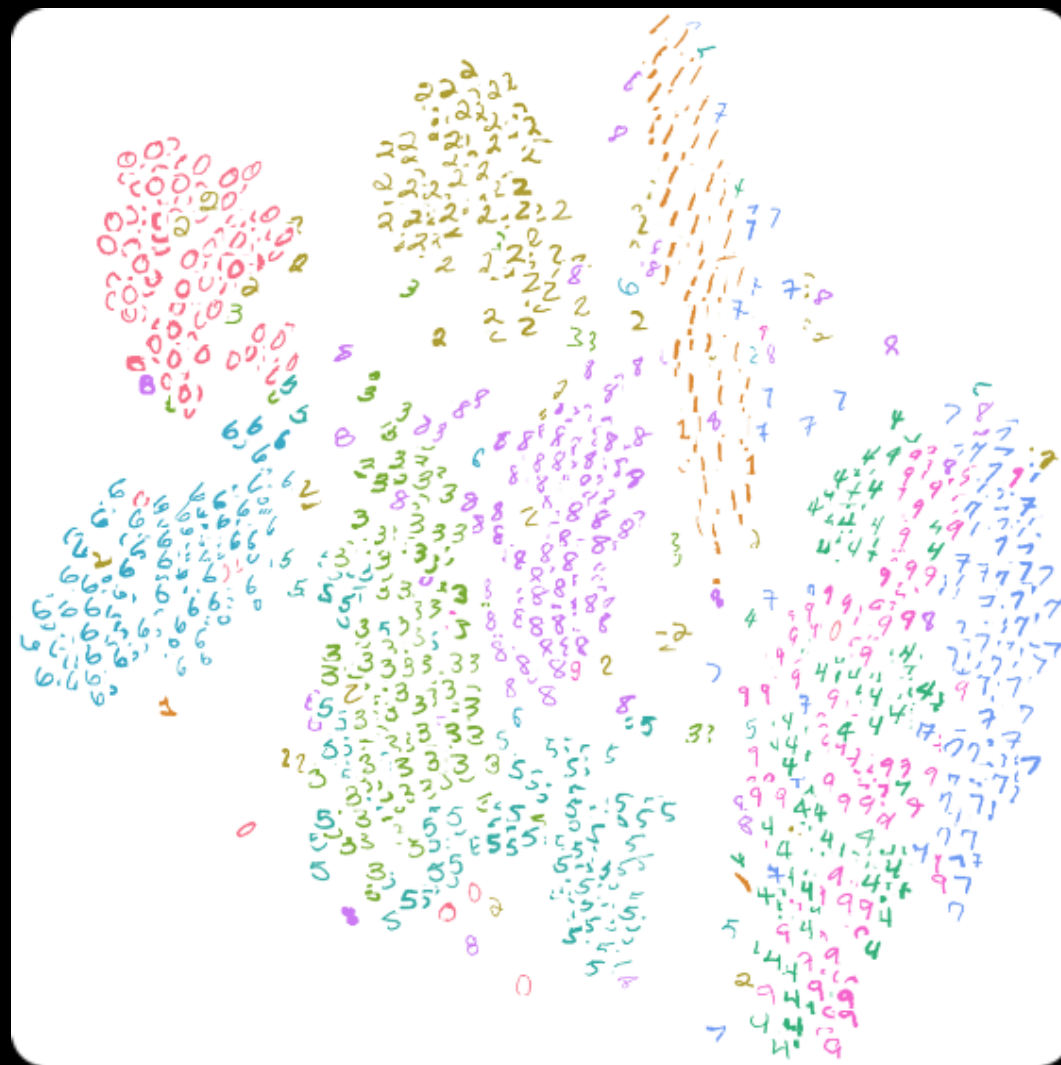

Source Domain

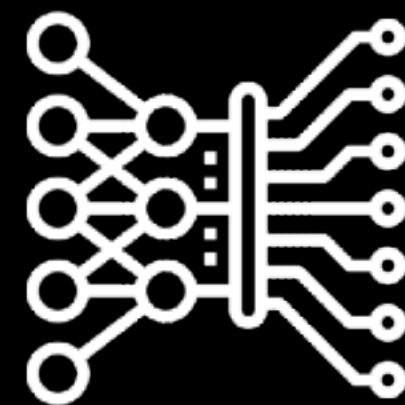

Usual (model-based) adaptation  
(train on source, fine-tune on target)

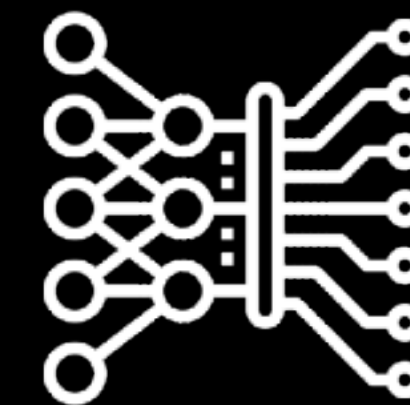

Target Domain