

Jobs

Generated by Talend Cloud Data Management Platform

Project Name	Airlines	GENERATION DATE	Sep 24, 2024, 10:09:06 AM
AUTHOR	dmishra1@trial61854.us.talend.com	Talend Cloud VERSION	8.0.1.20240524 0800-patch

Summary

Project Description
Description
Preview Picture Settings Context List Component List
Components Description


Project Description

Properties	Values
Name	Airlines
Language	java
Description	

Description

Properties	Values
Name	Job_acq_to_stg_flights
Author	dmishra1@trial61854.us.talend.com
Version	0.1
Purpose	
Status	
Description	
Creation	Sep 23, 2024, 1:26:37 PM
Modification	Sep 23, 2024, 8:03:05 PM

Preview Picture

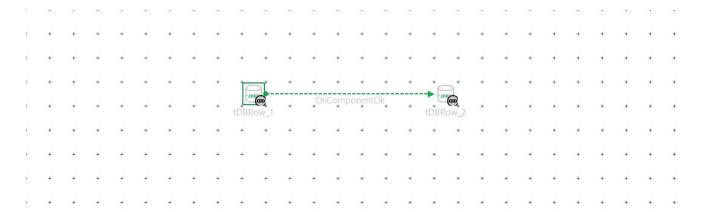

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false

Generated documentation

Implicit tContextLoad	false

Status & Logs

	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Type	Value	Source

Component List

Component Name	Component Type
tDBRow_1	JDBCRow
tDBRow 2	JDBCRow

Components Description

Component JDBCRow

	UNIQUE NAME	tDBRow_1	INPUT(S)	none
386	LABEL	UNIQUE NAME	OUTPUT(S)	tDBRow 2

Component Parameters:

Properties	Values
Database	JDBCRow
Unique Name	tDBRow 1
Component Name	Row
TACOKIT COMPONENT ID	bmV3amRiYyNKREJDI1Jvdw
TACOKIT_METADATA_TYPE_ID	
Version	1
Family	UDBC .
Start	true
Startable	true
SUBTREE START	true
END OF FLOW	tue
Activate	true
	Jude HELP
Help	
Update components	true
REPORT_PATH	
Property Type	Buit-In
Query Type	Buit-In
StatCatcher Statistics	false
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Label format	UNIQUE_NAME
Hint format	 <b <="" b="" unique_name=""> COMMENT_
Connection format	row
Show Information	false
Schema	Built-In
Enable database choice	false
Database	
Connect with	
Define JDBC URL	true
JDBC URL	idbc:snowflake://srhnwjq-vy05257.snowflakecomputing.com/?db=airlines&schema=stg
Host	about of the first
Port	80
Database	
Parameters	
Drivers	[(configuration.dataSet.dataStore.jdbcDriver[].path=mvn:org.talend.libraries/snowflake-jdbc-3.19.0/6.0.0-SNAPSHOT/jar}]
	neumigration audaset datasotrie gluculver paur invitorigataien datasotrie datasotrie gluculver paur invitorigataien datasotrie datasotrie gluculver paur invitorigataien datasotrie datasot
Driver class	
User ID Password	debaduttam999
Use or register a shared DB connection	
Shared DB connection name	false
Specify a data source alias	false
Data source alias	
Mapping file	mysql_id
Authentication type	BASIC
Private key	
Private key password	
OAuth token endpoint	
Client ID	
Client secret	
Grant type	CLIENT_CREDENTIALS
OAuth username	
OAuth password	
Scope	
Table	stq flights
Query	TRUNCATE TABLE STG.stg ifk flights;
(man-1)	1

Die on error	true
Use auto-commit	true
Auto-commit	false
Force protocol	false
JDBC driver protocol	
Connection timeout	30
Connection validation timeout	10
Propagate record set	false
Record set column	
Use PreparedStatement	false
configuration.preparedStatementParameters	
Detect error when multiple statements	false
Commit every	10000
Use query timeout	false
Timeout (seconds)	30
Use an existing connection	false
Component List	
LAYOUT_MAIN	
LAYOUT_ADVANCED	
configuration.dataSetversion	-1
configuration.dataSet.dataStoreversion	-1
	Built-In
Schema MERGE	Built-In
Reject Schema	Built-In
DATASTORE PATH	configuration.dataSet.dataStore

Schema for tDBRow 1:

•	Schema for tDBROW_1.							
	Column	Key	Type	Length	Precision	Nullable	Comment	

Original Function Parameters: Component JDBCRow

J. 100	UNIQUE NAME	tDBRow_2	INPUT(S)	tDBRow 1
	LABEL	UNIQUE NAME	OUTPUT(S)	none

Component Parameters:

Properties	
	Values
Database	JDBCRow
Unique Name	tDBRow 2
Component Name	Row
Component Name	NOW THE PROPERTY OF THE PROPER
TACOKIT_COMPONENT_ID	bmV3amRiYyNKREJDI1Jvdw
TACOKIT_METADATA_TYPE_ID	
Version	lı .
	ÜDBC
Family	
Start	false
Startable	true
SUBTREE_START	true
DOBINEL_CIANT	
END_OF_FLOW	true
Activate	true
Help	HELP
Update components	true
opuate components	uue
REPORT_PATH	
Property Type	Built-In
Query Type	Built-In
louis type	
StatCatcher Statistics	false
Enable parallel execution	false
Number of parallel executions	b
DADALI CLIZE VECD EMDTY	Folia
PARALLELIZE_KEEP_EMPTY	false
Label format	UNIQUE NAME_
Hint format	 VNIQUE_NAME_COMMENT_
Connection format	row
Show Information	false
Schema	Built-In
Enable database choice	false
Database Choice	
Connect with	
Define JDBC URL	true
JDBC URL	idbc:snowflake://srhnwjq-vy05257.snowflakecomputing.com/?db=airlines&schema=stg
I leet	about shown are a straining of the strai
Host	
Port	80
Database	
Parameters	
Drivers	[(configuration.dataSet.dataStore.jdbcDriver[].path=mvn:org.talend.libraries/snowflake-jdbc-3.19.0/6.0.0-SNAPSHOT/jar}]
Driver class	net.snowflake.client.jdbc.SnowflakeDriver
User ID	debaduttam999
	hepadutanisss
Password	***************************************
Use or register a shared DB connection	false
Shared DB connection name	
One of the determinant	ku.
Specify a data source alias	false
Data source alias	
Mapping file	mysql id
	DACIO
Authentication type	BÁSIC
Authentication type Private key	BÁSIC
Authentication type Private key	BASIC
Authentication type Private key Private key password	BASIC
Authentication type Private key Private key password OAuth token endpoint	BASIC
Authentication type Private key Private key password OAuth token endpoint	BASIC
Authentication type Private key Private key password OAuth token endpoint	BASIC
Authentication type Private key Private key password Outh token endpoint Client ID Client secret	BASIC
Authentication type Private key Private key password OAuth token endpoint Client ID Client secret Grant type	BASIC CLIENT CREDENTIALS
Authentication type Private key password Outh token endpoint Client ID Client ID Client secret Grant type Outh byen	BASIC
Authentication type Private key Private key password OAuth token endpoint Client B Client secret Grant type OAuth username OAuth password	BASIC
Authentication type Private key Private key password OAuth token endpoint Client B Client secret Grant type OAuth username OAuth password	BASIC
Authentication type Private key password Doubt hoken endpoint Client ID Client ID Client secret Grant type Doubt hoken password Doubt hoken password Socope	BASIC CLIENT_CREDENTIALS
Authentication type Private key Private key password Outh token endpoint Client BO Client secret Grant type Outh token endpoint Client secret Grant type Outh token endpoint Client secret Grant type Tant typ	BASIC CLIENT CREDENTIALS stg_airlines
Authentication type Private key password Doubt hoken endpoint Client ID Client ID Client Secret Grant type Outh bearname Douth password Scope Table Query	BASIC CLIENT_CREDENTIALS stg_airlines INSERT INTO STG stg_fik_flights SELECT * FROM ACO.ACO_fik_flights;
Authentication type Private key password DAuth token endpoint Client ID Client secret Grant type DAuth username DAuth username DAuth password Scope Table Query Dien en error	BASIC CLIENT CREDENTIALS Stg_airlines INSERT INTO STG stg_jfk_flights SELECT * FROM ACQ.ACQ_jfk_flights; Irue
Authentication type Private key password DAuth token endpoint Client ID Client secret Garant type DAuth username DAuth username DAuth password Scope Table Query Dien en error	BASIC CLIENT_CREDENTIALS stg_airlines INSERT INTO STG stg_fik_flights SELECT * FROM ACO.ACO_fik_flights;
Authentication type Private key password DAuth token endpoint Client ID Client ID Client Secret Grant type DAuth password DAuth password Scope Table Query Die on error Use auto-commit	BASIC CLIENT_CREDENTIALS Ist_airlines INSERT INTO STG stg_jfk_flights SELECT * FROM ACO.ACO.jfk_flights; Irue Irue
Authentication type Private key password DAuth token endpoint Dilent LD Client secret Stant type DAuth username DAuth username DAuth username DAuth password Scope Table Query Die on error Jise auto-commit Jise auto-commit	BASIC CLIENT CREDENTIALS stg_airlines INSERT INTO STG.stg_jfk_flights SELECT * FROM ACQ.ACQ_jfk_flights; true frue frue frue frue
Authentication type Private key password DAuth token endpoint Client ID Client ID Client Secret Grant type DAuth password DAuth password Scope Table Query Die on erro Use auto-commit Auto-commit Auto-commit Force protocol	BASIC CLIENT_CREDENTIALS Ist_airlines INSERT INTO STG stg_jfk_flights SELECT * FROM ACO.ACO.jfk_flights; Irue Irue
Authentication type Private key password DAuth token endpoint Dilent ID Client secret Grant type DAuth username DAuth username DAuth username DAuth password Scope Table Query Die on error Jse auto-commit Force protocol	BASIC CLIENT CREDENTIALS stg_airlines INSERT INTO STG.stg_jfk_flights SELECT * FROM ACQ.ACQ_jfk_flights; true frue frue frue frue
Authentication type Private key password DAuth token endpoint Dilent ID Client secret Grant type DAuth username DAuth username DAuth username DAuth password Scope Table Query Die on error Jse auto-commit Force protocol	BASIC CLIENT CREDENTIALS stg_airlines INSERT INTO STG.stg_jfk_flights SELECT * FROM ACQ.ACQ_jfk_flights; true true false false
Authentication type Private key password Doubt hoken endpoint Client ID Client ID Client secret Grant type Doubt hoken semen Douth password Scope Table Query Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol Connection timeout	BASIC CLIENT_CREDENTIALS Ist_airlines INSERT INTO STG.stg_fk_flights SELECT*FROM ACQ.ACQ_fk_flights; Irue Irue Irue Ialse Ia
Authentication type Private key password OAuth token endpoint Dilent ID Dilent serret Grant type OAuth username OAuth username OAuth password Scope Table Duery Die on error Jise auto-commit Auto-commit Force protocol DIBOE diver protocol Connection validation timeout	BASIC CLIENT CREDENTIALS stq. airlines stq. airlines INSERT INTO STG.stg. jfk, flights SELECT * FROM ACQ.ACQ_jfk_flights; true true false false false 30 10
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password DAuth password Scope Table Query Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol Connection timeout Connection validation timeout Connection unidation timeout Connection timeout Connection unidation timeout	BASIC CLIENT_CREDENTIALS Ist_airlines INSERT INTO STG.stg_fk_flights SELECT*FROM ACQ.ACQ_fk_flights; Irue Irue Irue Ialse Ia
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password DAuth password Scope Table Query Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol Connection timeout Connection validation timeout Connection unidation timeout Connection timeout Connection unidation timeout	BASIC CLIENT CREDENTIALS stq. airlines stq. airlines INSERT INTO STG.stg. jfk, flights SELECT * FROM ACQ.ACQ_jfk_flights; true true false false false 30 10
Authentication type Private key password OAuth token endpoint Dient ID Dient ID Dient secret Grant type OAuth password Scope Table Double password Scope Table Duery Die on error Use auto-commit Auto-commit Force protocol DIBC driver protocol Connection timeout Propagate record set	BASIC CLIENT_CREDENTIALS stg_airlines INSERT INTO STG.stg_jfk_flights SELECT * FROM ACQ.ACQ_jfk_flights; Irue Irue Irue Irue Iruse
Authentication type Private key Private key password OAuth token endpoint Client ID Client ID Client secret Grant type OAuth password Scope Table Query Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol Connection timeout Connection validation timeout Propagate record set Record set column Jis PerpagateStatement	BASIC CLIENT CREDENTIALS stq. airlines stq. airlines INSERT INTO STG.stg. jfk, flights SELECT * FROM ACQ.ACQ_jfk_flights; true true false false false 30 10
Authentication type Private key password OAuth token endpoint Dient ID Dient scret Grant type OAuth password OAuth password OAuth password Scope Table Query Die on error Use auto-commit Auto-commit Force protocol DIBC driver protocol Connection timeout Propagate record set Record set Column Use Propagate record set Propagate record set Propagate record set Propagate record set Record set Column Use PreparedStatement Danguage record set Propagate record set Propagate record set Record set Column Use PrepagadStatement Danguage record set Propagate rec	BASIC CLIENT_CREDENTIALS stg_airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Irue Ialse 30 10 Ialse Ialse Ialse
Authentication type Private key password OAuth token endpoint Dient ID Dient scret Grant type OAuth password OAuth password OAuth password Scope Table Query Die on error Use auto-commit Auto-commit Force protocol DIBC driver protocol Connection timeout Propagate record set Record set Column Use Propagate record set Propagate record set Propagate record set Propagate record set Record set Column Use PreparedStatement Danguage record set Propagate record set Propagate record set Record set Column Use PrepagadStatement Danguage record set Propagate rec	BASIC CLIENT_CREDENTIALS stg_airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Irue Ialse 30 10 Ialse Ialse Ialse
Authentication type Private key Private key password DAuth token endpoint Client ID Client ID Client Secret Grant type DAuth password Scope Table Query Die on error Use auto-commit Auto-commit Force protocol JDBC driver protocol Connection timeout Connection timeout Record set column Juse Preparagistalement Los	EASIC CLIENT_CREDENTIALS stg_airlines InsSERT INTO STG stg_jfk_flights SELECT * FROM ACO.ACO.jfk_flights; true true false false 30 10 10 false false false false false false false
Authentication type Private key password OAuth token endpoint Dilent ID Dilent secret Grant type OAuth password OAuth password OAuth password Scope Table Deep Table	BASIC CLIENT_CREDENTIALS stg_airlines stg_airlines InsERT INTO STG.stg_fk_flights SELECT * FROM ACQ.ACQ_fk_flights; Irue Irue Talse 10 10 1alse 11 1alse 13 16 17 18 18 18 19 10 100 100 100 100
Authentication type Private key Private key password OAuth token endpoint Client ID Client ID Client Secret Grant type OAuth password Scope Table Query Die on error Use auto-commit Auto-commit Force protocol IDBC driver protocol Connection timeout Connection timeout Propagate record set Record set column Use Propagate record set Record set column Use PreparedStatement Lonfiguration, preparedStatementParameters Detect error when multiple statements Commit every Use query limeout	BASIC CLIENT_CREDENTIALS stg_airlines INSERT INTO STG stg_jfk_flights SELECT * FROM ACO.ACO.jfk_flights; Irue Irue false false 30 10 false
Authentication type Private key password OAuth token endpoint Dilent ID Dilent secret Grant type OAuth password OAuth token endpoint Dilent secret Grant type OAuth password Scope Table Deep Control of the Control of	BASIC CLIENT_CREDENTIALS stq. airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Talse 10 10 1alse 11 1alse 11 1alse 130 10 1alse 131 14 151 151 161 17 181 181 181 181 181 181
Authentication type Private key password OAuth token endpoint Dilent ID Dilent secret Grant type OAuth password OAuth token endpoint Dilent secret Grant type OAuth password Scope Table Deep Control of the Control of	BASIC CLIENT_CREDENTIALS stq. airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Talse 10 10 1alse 11 1alse 11 1alse 130 10 1alse 131 14 151 151 161 17 181 181 181 181 181 181
Authentication type Private key password OAuth token endpoint Client ID Client ID Client secret Grant type OAuth usename OAuth password Scope Table Query Die on error Jes auto-commit Auto-commit Force protocol IJDBC driver protocol Connection timeout Connection timeout Connection stemout Record set column Jes PreparaGstatement Son Propagate record set Record set column Use PreparaGstatement Confliction when multiple statements Commit every Les query timeout Timeout (seconds) Les an existing connection	BASIC CLIENT_CREDENTIALS stg_airlines INSERT INTO STG stg_jfk_flights SELECT * FROM ACO.ACO.jfk_flights; Irue Irue false false 30 10 false
Authentication type Private key password DAuth token endpoint Dilent ID Dilent secret Grant type DAuth password DAuth password DAuth password Scope Table Duery Die on error D	BASIC CLIENT_CREDENTIALS stq. airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Talse 10 10 1alse 11 1alse 11 1alse 130 10 1alse 131 14 151 151 161 17 181 181 181 181 181 181
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password DAuth password Scope Table Query Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol JDBC driver protocol Connection timeout Connection timeout Connection validation timeout Propagate record set Record set column Juse PreparadStatementParameters Detect error when multiple statements Commit every Juse auto-condition Juse PreparadStatementFarameters Detect error when multiple statements Commit every Juse auto-grid meout Timeout (seconds) Juse an existing connection Component List Comment Juse and Comme	BASIC CLIENT_CREDENTIALS stq. airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Talse 10 10 1alse 11 1alse 11 1alse 130 10 1alse 131 14 151 151 161 17 181 181 181 181 181 181
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password DAuth password Scope Table Query Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol JDBC driver protocol Connection timeout Connection timeout Connection validation timeout Propagate record set Record set column Juse PreparadStatementParameters Detect error when multiple statements Commit every Juse auto-condition Juse PreparadStatementFarameters Detect error when multiple statements Commit every Juse auto-grid meout Timeout (seconds) Juse an existing connection Component List Comment Juse and Comme	BASIC CLIENT_CREDENTIALS stq. airlines InsERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; Irue Irue Talse 10 10 1alse 11 1alse 11 1alse 130 10 1alse 131 14 151 151 161 17 181 181 181 181 181 181
Authentication type Private key password OAuth token endpoint Client ID Client ID Client secret Grant type OAuth password OAuth password Scope Table Duery Die on error Jes auto-commit Auto-commit Auto-commit Force protocol DIBC driver protocol Comnection validation timeout Propagate record set Record set column Jise PreparedStatementParameters Detect error when multiple statements Commit every Jise query timeout Fineout (seconds) Jise and seconds) Jise and seconds Jise preparedStatementParameters Detect error when multiple statements Commit every Jise query timeout Fineout (seconds) Jise an existing connection Component List LAYOUT_MAIN LAYOUT_ADVANCED	BASIC CLIENT_CREDENTIALS stg. airlines stg. airlines INSERT INTO STG.stg_ffk_flights SELECT * FROM ACQ.ACQ_ffk_flights; True false false 10 110 1alse 12 1alse 130 1alse 130 1alse 130 1alse
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password Scope Table Guery Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol JDBC driver protocol Connection timeout Connection timeout Connection validation timeout Propagate record set Record set column Juse PreparadStatementParameters Detect error when multiple statements Commit every Juse auto-condition Juse PreparadStatementFormanters Detect error when multiple statements Commit every Juse an existing connection Juse an existing connection Component List AYOUT MAIN LAYOUT MAIN LAYOUT MAIN LAYOUT ADVANCED	BASIC CLIENT_CREDENTIALS stg_airlines InsSERT INTO STG stg_jfk_flights SELECT * FROM ACQ.ACQ_jfk_flights; true true false false 30 10 10 false false false false false 13 13 14 15 15 16 16 16 16 16 16 16 16 16 16 16 16 16
Authentication type Private key password OAuth token endpoint Client ID Client secret Grant type OAuth password OAuth password OAuth password Scope Table Oauth password Scope Table Duery Die on error Use auto-commit Auto-commit Auto-commit Auto-commit Auto-commit Force protocol JDBC driver protocol Connection validation timeout Propagate record set Record set Column Use PreparedStatementParameters Detect error when multiple statements Commit every Use query timeout Timeout (seconds) Use and set set of the password of the	BASIC CLIENT_CREDENTIALS stg. airlines stg. airlines stg. airlines INSERT INTO STG.stg_ffk_flights SELECT * FROM ACQ.ACQ_ffk_flights; True false false 10 110 1alse 11 1alse 130 1alse
Authentication type Private key password OAuth token endpoint Client ID Client secret Grant type OAuth password OAuth password OAuth password Scope Table Oauth password Scope Table Duery Die on error Use auto-commit Auto-commit Auto-commit Auto-commit Auto-commit Force protocol JDBC driver protocol Connection validation timeout Propagate record set Record set Column Use PreparedStatementParameters Detect error when multiple statements Commit every Use query timeout Timeout (seconds) Use and set set of the password of the	BASIC CLIENT_CREDENTIALS stg. airlines stg. airlines stg. airlines INSERT INTO STG.stg_ffk_flights SELECT * FROM ACQ.ACQ_ffk_flights; True false false 10 110 1alse 11 1alse 130 1alse
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password Scope Table Cuery Die on error Jis auto-commit Auto-commit Force protocol JDBC driver protocol JDBC driver protocol Connection timeout Connection timeout Connection validation timeout Propagate record set Record set column Juse PreparadStatementParameters Detect error when multiple statements Commit very Juse auto-condit Juse query timeout Timeout (seconds) Juse query timeout Timeout (seconds) Juse an existing connection Component List AYOUT MAIN LAYOUT ADVANCED configuration dataSet dataStore_ version Schema LOOKUP	BASIC CLIENT_CREDENTIALS stg_airlines InsSERT INTO STG stg_jfk_flights SELECT * FROM ACO.ACO.jfk_flights; true true false false 30 10 10 false false false false false 13 16 17 18 18 10 10 10 10 10 10 10 10 10 10 10 10 10
Authentication type Private key password OAuth token endpoint Client ID Client ID Client secret Grant type OAuth password OAuth password Scope Table Scope Table Juser Die on error Jes auto-commit Auto-commit Force protocol JDBC driver proto	BASIC CLIENT_CREDENTIALS stg. airlines INSERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; True True false false false 10 11 11 11 11 11 Built-In
Authentication type Private key Private key password OAuth token endpoint Client ID Client ID Client secret Grant type OAuth password Scope Table Outh username OAuth password Scope Table Ouery Die on error Jise auto-commit Auto-commit Force protocol JDBC driver protocol JDBC driver protocol Connection timeout Connection timeout Connection validation timeout Propagate record set Record set dolumn Juse PreparaGstatement Parameters Detect error when multiple statements Commit every Juse auto-condition Component List Scope III Juse query timeout Timeout (seconds) Juse an existing connection Component List AYOUT MAIN AYOUT ADVANCED configuration dataSet dataStore. version Schema LOGKUP Schema MERGE Reject Schema	BASIC CLIENT_CREDENTIALS stg_airlines InsSERT INTO STG stg_ffk_flights SELECT*FROM ACQ.ACQ_ffk_flights; true true false false 10 10 false 1alse
Authentication type Private key password DAuth token endpoint Client ID Client ID Client secret Grant type DAuth password South type DAuth password Soope Table Soope Table Descript Die on error Jise auto-commit Auto-commit Force protocol JDBC driver protocol JD	BASIC CLIENT_CREDENTIALS stg. airlines INSERT INTO STG.stg_fik_flights SELECT * FROM ACQ.ACQ_fik_flights; True True false false false 10 11 11 11 11 11 Built-In

Schema for tDBRow_2 :

	Colu	nn K	ey Ty	/pe Length	Precision	Nullable	Comment
--	------	------	-------	------------	-----------	----------	---------

Original Function Parameters: