

# Jobs

Generated by Talend Cloud Data Management Platform

Project Name	Airlines	GENERATION DATE	Sep 24, 2024, 10:09:02 AM
AUTHOR	dmishra1@trial61854.us.talend.com	Talend Cloud VERSION	8.0.1.20240524 0800-patch

### **Summary**

Project Description
Description
Preview Picture Settings Context List Component List
Components Description


# **Project Description**

Properties	Values
Name	Airlines
Language	java
Description	

## **Description**

Properties	Values	
Name	Job_acq_to_stg_airports	
Author	dmishra1@trial61854.us.talend.com	
Version	0.1	
Purpose		
Status		
Description		
Creation	Sep 23, 2024, 1:26:14 PM	
Modification	Sep 23, 2024, 8:03:02 PM	

### **Preview Picture**

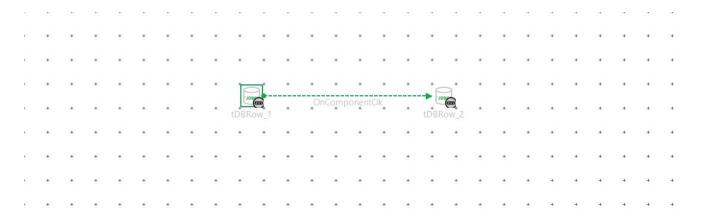

## **Settings**

#### Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false

Generated documentation

Implicit tContextLoad	false

### Status & Logs

	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

## **Context List**

#### ContextDefault

Name Prompt Need Prompt? Type Value Source						
	Name	Prompt	Need Prompt?	Туре	Value	Source

# **Component List**

Component Name	Component Type
tDBRow_1	JDBCRow
tDBRow_2	JDBCRow

# **Components Description**

#### Component JDBCRow

	UNIQUE NAME	tDBRow_1	INPUT(S)	none
386	LABEL	UNIQUE NAME	OUTPUT(S)	tDBRow 2

**Component Parameters:** 

Properties	Values
Database	JDBCRow
Unique Name	tDBRow 1
Component Name	Row
Component Name TACOKIT_COMPONENT_ID	bmV3amRiYyNKREJDI1Jvdw
TACOKIT_METADATA_TYPE_ID	
Version	1
Family	ÜDBC
Start	true
Startable	true
SUBTREE START	tue
END OF FLOW	
	true
Activate	true
Help	HELP
Update components	true
REPORT_PATH	
Property Type	Buit-In
Query Type	Built-In
tStatCatcher Statistics	false
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Label format	UNIQUE NAME
Hint format	 VNIQUE NAME  COMMENT
Connection format	row
Show Information	false
Schema	Built-In
Enable database choice	False
Database	rano
Connect with	
Define JDBC URL	true
JDBC URL	dbc:snowflake://srhnwjq-vy05257.snowflakecomputing.com/?db=airlines&schema=stg
	labc.snownake://smmwjq-vyub257.snownakecomputing.com/?db=ammes&scriema=stg
Host	
Port	80
Database	
Parameters	U.
Drivers	[(configuration.dataSet.dataStore.jdbcDriver[].path=mvn:org.talend.libraries/snowflake-jdbc-3.19.0/6.0.0-SNAPSHOT/jar]]
Driver class	net.snowflake.client.jdbc.SnowflakeDriver
User ID	debaduttam999
Password	
Use or register a shared DB connection	false
Shared DB connection name	
Specify a data source alias	false
Data source alias	
Mapping file	mysql id
Authentication type	BASIC
Private key	
Private key password	
OAuth token endpoint	
Client ID	
Client secret	<u> </u>
Grant type	CLIENT CREDENTIALS
OAuth username	COLOR OF COL
OAuth password	
Scope Table	eta cirlinea
Table	stg airlines
Query	TRUNCATE TABLE STG.stg_airports;

in a	
Die on error	true
Use auto-commit	true
Auto-commit	false
Force protocol	false
JDBC driver protocol	
	30
Connection validation timeout	10
	false
Record set column	
Use PreparedStatement	false
configuration.preparedStatementParameters	
Detect error when multiple statements	false
Commit every	10000
Use query timeout	false
Timeout (seconds)	30
	false
Component List	
LAYOUT_MAIN	
LAYOUT_ADVANCED	
configuration.dataSetversion	-1
configuration.dataSet.dataStoreversion	-1
	Built-In
	Built-In
	Built-In
DATASTORE_PATH	configuration.dataSet.dataStore

#### Schema for tDBRow 1:

•	Scrienia ioi ibbito	·w_					
	Column	Key	Type	Length	Precision	Nullable	Comment

#### **Original Function Parameters:** Component JDBCRow

	المالات المالات	UNIQUE NAME	tDBRow_2	INPUT(S)	tDBRow 1
		LABEL	UNIQUE NAME	OUTPUT(S)	none

### **Component Parameters:**

Properties	Values
Database	JDBCRow
Unique Name	tDBRow 2
Component Name	Row
TACOKIT COMPONENT ID	bmV3amRiYyNKREJDI1Jvdw
TAGORIT COMIT CIVELYT ID	DITTO SATINGT YNING CONTOVOW
TACOKIT_METADATA_TYPE_ID	
Version	li I
Family	JDBC
Start	false
Startable	true
SUBTREE_START	
DUBIREE_START	true
END OF FLOW	true
Activate	true
	HELP
Help	
Update components	true
REPORT_PATH	
	D. Clark
Property Type	Built-In
Query Type	Built-In
StatCatcher Statistics	false
Enable parallel execution	false
Number of parallel executions	2
DADALLELIZE VEED EMPTY	folco
PARALLELIZE_KEEP_EMPTY	false
Label format	_UNIQUE_NAME
Hint format	 <b b="" unique_name_<="">  COMMENT_</b>
Connection format	row
Show Information	false
Schema	Built-In
Enable database choice	false
Database	
Connect with	
Define JDBC URL	true
JDBC URL	jdbc:snowflake://srhnwjq-vy05257.snowflakecomputing.com/?db=airlines&schema=stg
Heat	passion of the state of the sta
Host	
Port	80
Database	
Parameters	
Drivers	[(configuration.dataSet.dataStore.jdbcDriver[].path=mvn:org.talend.libraries/snowflake-jdbc-3.19.0/6.0.0-SNAPSHOT/jar}]
DIIVOIS	Rouniguration.databet.cdatablec.jabet/verjj.patri-mvn.org.talend.iib/anes/snownake-jabe-5.15.0/0.0-0444 0/10/1/jar
Driver class	net.snowflake.client.jdbc.SnowflakeDriver
User ID	debaduttam999
Password	************
Password	
Use or register a shared DB connection	false
Shared DB connection name	
	CI.
Specify a data source alias	false
Data source alias	
Mapping file	myeal id
Authentication type	mysql id BASIC
	BASIC
Private key	BASIC
Private key Private key password	BASIC
Private key Private key password	BASIC
Private key Private key password OAuth token endpoint	BASIC
Private key Private key password OAuth token endpoint Client ID	BASIC
Private key Private key password OAuth token endpoint Client ID Client secret	
Private key Private key password OAuth token endpoint Client ID Client secret	
Private key Private key password OAuth token endpoint Client ID Client secret Grant type	BASIC  CLIENT CREDENTIALS
Private key Private key password  OAuth token endpoint Client ID Client Secret Grant type OAuth username	
Private key Private key password  OAuth token endpoint Client ID  Client secret Grant type  OAuth username  OAuth password	
Private key Private key password  OAuth token endpoint Client ID  Client secret Grant type  OAuth username  OAuth password	
Private key Private key password  DAuth token endpoint  Client ID  Client secret  Srant type  OAuth username  DAuth password  Scope	CLIENT CREDENTIALS
Private key Private key password OAuth token endpoint Client to Client secret Grant type OAuth username OAuth password Scope Table	CLIENT CREDENTIALS  stg. airlines
Private key Private key password  DAuth token endpoint  Client ID  Client secret  Srant type  OAuth username  DAuth password  Scope	CLIENT CREDENTIALS
Private key Private key password OAuth token endpoint Client to Cl	CLIENT CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports;
Private key Private key password OAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; true
Private key Private key password  DAuth token endpoint Client ID Client secret Grant type  DAuth username  DAuth password Scope  Table  Query Die on error Jis e auto-commit	CLIENT CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; true true
Private key Private key password OAuth token endpoint Client to Client to Client to Client to Client secret Grant type OAuth username OAuth password Scope Table Query Die on error Jse auto-commit Auto-commit	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true true false
Private key Private key password OAuth token endpoint Client to Client to Client to Client to Client secret Grant type OAuth username OAuth password Scope Table Query Die on error Jse auto-commit Auto-commit	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true true false
Private key Private key password  OAuth token endpoint Client ID Client secret Grant type OAuth username OAuth password Scope Table Query Die on error Jise auto-commit Auto-commit Force protocol	CLIENT CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; true true
Private key Private key password OAuth token endpoint Client to Client to Client to Client to Client to Client to OAuth password Scope Table Query Die on error Jse auto-commit Force protocol JDBC driver protocol	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue fraise faise
Private key Private key password  OAuth token endpoint Client ID Client secret Srant type OAuth username OAuth password Scope Table Query Die on error Die auto-commit Auto-commit Force protocol DBCG driver protocol Connection timeout	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true true false
Private key Private key password  OAuth token endpoint Client ID Client secret Srant type OAuth username OAuth password Scope Table Query Die on error Die auto-commit Auto-commit Force protocol DBCG driver protocol Connection timeout	CLIENT CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; Irue Irue False False False False 70 70 70 70 70 70 70 70 70 70 70 70 70
Private key Private key password OAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue false false 30
Private key Private key password  DAuth token endpoint  Client Is Client ID  Client secret  Srant type  DAuth username  DAuth username  DAuth password  Scope  Table  Table  Je auto-commit  Force protocol  JDBC driver protocol  Connection timeout  Connection validation timeout  Concert of the protogate record set	CLIENT CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; Irue Irue False False False False 70 70 70 70 70 70 70 70 70 70 70 70 70
Private key Private key password  DAuth token endpoint  Client Is Client ID  Client secret  Srant type  DAuth username  DAuth username  DAuth password  Scope  Table  Table  Je auto-commit  Force protocol  JDBC driver protocol  Connection timeout  Connection validation timeout  Concert of the protogate record set	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue false false 30
Private key Private key password OAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines stg_airlines iNSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue false false 30 10 false
Private key Private key password DAuth token endpoint Client ID Client secret Srant type DAuth username DAuth username DAuth password Scope Table Table Table Table Table Topenomit Auto-commit Auto-commit Force protocol DIBC driver protocol Connection timeout Connection validation timeout Record set Column Juse Prepagate record set Record set Column Juse Prepagate Statement	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue false false 30
Private key Private key password DAuth token endpoint Client ID Client secret Srant type DAuth username DAuth username DAuth password Scope Table Table Table Table Table Table Toping Tabl	CLIENT_CREDENTIALS  stg_airlines stg_airlines iNSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue false false 30 10 false
Private key Private key password OAuth token endpoint Client to Client C	CLIENT_CREDENTIALS  stg_airlines stg_airlines iNSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue faise faise 30 10 faise faise faise faise 11
Private key Private key password OAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; True True False False 10 10 10 10 false false false false false false false false
Private key Private key password OAuth token endpoint Client to Client to Client to Client to Client to Client to OAuth password Scope OAuth password Scope Table Query Die on error Jse auto-commit Auto-commit Force protocol DIBC driver protocol Connection validation timeout Fropagate record set Record set column Jse PreparedStatement Jse PreparedStatement Detect error when multiple statements Detect error when multiple statements Detect error when multiple statements	CLIENT_CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true frue faise faise 30 10 16 faise 11 faise 11 faise 11 faise 11 faise 11 faise 11 faise
Private key Private key password OAuth token endpoint Client to Client to Client to Client to Client to Client to OAuth password Scope OAuth password Scope Table Query Die on error Jse auto-commit Auto-commit Force protocol DIBC driver protocol Connection validation timeout Fropagate record set Record set column Jse PreparedStatement Jse PreparedStatement Detect error when multiple statements Detect error when multiple statements Detect error when multiple statements	CLIENT_CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true frue faise faise 30 10 16 faise 11 faise 11 faise 11 faise 11 faise 11 faise 11 faise
Private key Private key password DAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; True True True Talse Jaise
Private key Private key password OAuth token endpoint Client to Client secret Grant type OAuth username OAuth password Scope Table Query Die on error Jse auto-commit Force protocol DIBC driver protocol Connection validation timeout Propagate record set Record set column Jse PreparedStatement Jse Configuration preparedStatement profiguration profiguration prepared Statements Detect error when multiple statements	CLIENT CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true true faise faise 30 10 faise faise 11 faise 10 faise 11 faise 10 faise
Private key Private key password DAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; True True True Talse Jaise
Private key Private key password OAuth token endpoint Client to Cl	CLIENT CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true true faise faise 30 10 faise faise 11 faise 10 faise 11 faise 10 faise
Private key password OAuth token endpoint Client to Client Table Dought to Client to C	CLIENT CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true true faise faise 30 10 faise faise 11 faise 10 faise 11 faise 10 faise
Private key Private key password OAuth token endpoint Client to Cl	CLIENT CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true true faise faise 30 10 faise faise 11 faise 10 faise 11 faise 10 faise
Private key password OAuth token endpoint Client to Client Table Dought to Client to C	CLIENT CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true true faise faise 30 10 faise faise 11 faise 10 faise 11 faise 10 faise
Private key Private key password OAuth token endpoint Client to Client Table Dougry Die on error Use auto-commit Force protocol Die on error Use auto-commit Force protocol Connection timeout Connection validation timeout Propagate record set Record set Column Use PreparedStatement Dietoct error when multiple statements Detect error when multiple statements Det	CLIENT_CREDENTIALS  stg_airlines stg_airlines iNSERT INTO STG_stg_airports SELECT * FROM ACQ_ACQ_airports; true frue false false  30 10 false false 11 false 11 false 13 false 30 false 30 false 30 false 51 false 53 63 64 65 65 65 66 66 66 66 66 66 66 66 66 66
Private key Private key password OAuth token endpoint Client to Cl	CLIENT CREDENTIALS  stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACQ.ACQ_airports; true true faise faise 30 10 faise faise 11 faise 10 faise 11 faise 10 faise
Private key password OAuth token endpoint Client to Client Table Dought to Client to C	Stg_airlines stg_airlines stg_airlines stg_airlines SELECT*FROMACO.ACO_airports; true true faise 10 10 faise 11 10 faise 13 10 faise 10 76 76 76 76 76 76 76 76 76 76 76 76 76
Private key password OAuth token endpoint Client to Client Table Dought to Client to C	Stg_airlines stg_airlines stg_airlines stg_airlines SELECT*FROMACO.ACO_airports; true true faise 10 10 faise 11 10 faise 13 10 faise 10 76 76 76 76 76 76 76 76 76 76 76 76 76
Private key Private key password OAuth token endpoint Client to Cl	CLIENT_CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; true true false false false  10 10 110 1alse 11   11   12   13   14   14   14   14   14   14   14
Private key Private key password OAuth token endpoint Client to Client Table OAuth password Scope Table Ouery Die on error Jse auto-commit Auto-commit Force protocol DIBC driver protocol Connection timeout Connection validation timeout Propagate record set Record set Column Jse PreparedStatement Die Configuration preparedStatement Parameters Detect error when multiple statements Commit every Jse query timeout Timeout (seconds) Jse an existing connection Component List AYOUT ADVANCED configuration dataSet. version configuration dataSet. version Schema MERGE	Stg_airlines stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACO.ACO_airports; true frue faise 10 10 faise 11 11 11 11 Built-In B
Private key password OAuth token endpoint Client to Client Table Dought to Client to C	CLIENT_CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; Tue
Private key password OAuth token endpoint Client to Client Table Dought to Client to C	CLIENT_CREDENTIALS  stg_airlines INSERT INTO STG.stg_airports SELECT * FROM ACQ.ACQ_airports; Tue
Private key Private key password OAuth token endpoint Client to Cl	Stg_airlines stg_airlines stg_airlines stg_airlines stg_airports SELECT * FROM ACO.ACO_airports; true frue faise 10 10 faise 11 11 11 11 Built-In B

# Schema for tDBRow\_2 :

		Column	Key	Type	Length	Precision	Nullable	Comment
--	--	--------	-----	------	--------	-----------	----------	---------

Original Function Parameters: