



Lua Interpreter

User's Manual

Version 7.12

The logo for Quik, consisting of the word "quik" in a white, lowercase, sans-serif font, centered within a solid green circle.

quik

Contents

1. About.....	5
1.1 Capabilities	5
1.2 Getting Started	5
1.3 Working With the Program	5
2. Workstation Functions Accessible from Lua Scripts.....	7
2.1 Service functions	7
2.2 Callback Functions.....	10
3. Functions for Interactions between Lua Scripts and QUIK Workstation.....	21
3.1 Functions for Accessing Rows in QUIK Tables	21
3.2 Functions for Accessing Available Parameters Lists	24
3.3 Function for Obtaining Cash Data	25
3.4 Function for Obtaining Security Limit Information	26
3.5 Function for Obtaining Futures Limits Information	26
3.6 Function for Obtaining Futures Positions Information.....	27
3.7 Function for Obtaining Instrument Information	27
3.8 Function for Obtaining a trading session date	27
3.9 Function for Obtaining Level II Quotes Table for Specified Class and Security.....	28
3.10 Functions for Working with Charts.....	28
3.11 Functions for Working with Orders	33
3.12 Function for Obtaining Values from Quotes Table	35
3.13 Functions for Obtaining Parameters of Client Portfolio Table.....	36
3.14 Functions for Obtaining Parameters from 'Buy/Sell' Table.....	41
3.15 Functions for Working with QUIK Workstation Tables	44
3.16 Function for Working with Labels	51
3.17 Functions for Ordering Level II Quotes Table.....	53
3.18 Functions for Ordering Quotes Table Parameters	54
4. Data Structures	55

4.1	Classes.....	55
4.2	Firms	56
4.3	Anonymous Trades	56
4.4	Trades.....	57
4.5	Orders	60
4.6	Current Positions for Client Accounts.....	62
4.7	Current Positions for Instruments.....	63
4.8	Stop Orders.....	63
4.9	Futures Limits	65
4.10	Client Account Positions (Futures).....	66
4.11	Cash Limits.....	67
4.12	Removing Cash Limit	68
4.13	Deleting Security Limit	68
4.14	Deleting Futures Limit	69
4.15	Limits for Securities.....	69
4.16	Cash Positions.....	70
4.17	Negotiated Deal Orders	71
4.18	Trades for Execution	73
4.19	Trading accounts	76
4.20	Reports on Trades for Execution.....	76
4.21	Instruments	77
4.22	Chart Candlesticks.....	78
4.23	Date and Time Format Used in Tables	78
4.24	Transactions	79
4.25	Asset Commitments and Claims	80
4.26	Currency: commitments and demands on assets	81
5.	Description of Bit Flags.....	82
5.1	Flags for the Orders, Negdeal Orders, Trades, and Trades for Execution Tables.....	82
5.2	Flags for Anonymous Trades Table.....	82
5.3	Flags for Stop Orders Table.....	83

5.4	Additional Flags for Stop Orders Table	83
6.	Functions for Working with Bit Masks in Data Structures	84
6.1	bit.tohex.....	84
6.2	bit.bnot	84
6.3	bit.band.....	84
6.4	bit.bor	84
6.5	bit.bxor.....	84
6.6	bit.test.....	85
7.	Indicators of the Technical Analysis	85
7.1	General Information.....	85
7.2	Functions and Global Variables of Script's Indicator	86
8.	Thred-safe Functions for Working With Lua Tables	96
9.	Appendixes.....	97
9.1	Appendix 1. Example of a Lua Script.....	97
9.2	Appendix 2. Examples of sorting in tables	104
9.3	Appendix 3. Examples of Processing Table Events	105
9.4	Appendix 4. Examples of Using the 'params' Parameter in the 'SearchItems' Function.....	115

Send your feedback and comments regarding this Instruction to: quiksupport@arqatech.com

1. About

Lua Interpreter (**QLua**) is a library that allows users to interact with a QUIK Workstation using scripts written in Lua. For further details on Lua, visit www.lua.org.

1.1 Capabilities

QLua provides access to internal data of a QUIK Workstation and can send client transactions from a Lua script to the QUIK sever. **QLua** enables (unlike the QPILE language) asynchronous processing in a script as it receives data, as well as the capability to constantly request new data from a client workstation. Asynchronous processing is based on the use of special callback functions defined in the script.

QLua can process the following events from QUIK Workstations:

- reception of new data;
- connection to the QUIK server;
- disconnection from the QUIK server;
- a script stops;
- a QUIK Workstation is closed.

All of these events might call an appropriate callback in the script.

QLua also provides the possibility of loading libraries written in other programming languages unto scripts.

Incorrect operation of third party libraries loaded into a script can cause errors in QUIK Workstation operation.

1.2 Getting Started

QLua is an optional component of a QUIK Workstation.

QLua is provided in the qlua.dll file, which must be in the working directory of the QUIK Workstation, for example, C:\Program Files\QUIK.

1.3 Working With the Program


QLua functions are available from the program main menu. When the component is installed, new item **Services / Lua scripts** appears in the program menu.

1.3.1 Purpose

In the **Available scripts** form, you can add, remove, reload or launch scripts.

1.3.2 Window settings


The window has the following control elements:

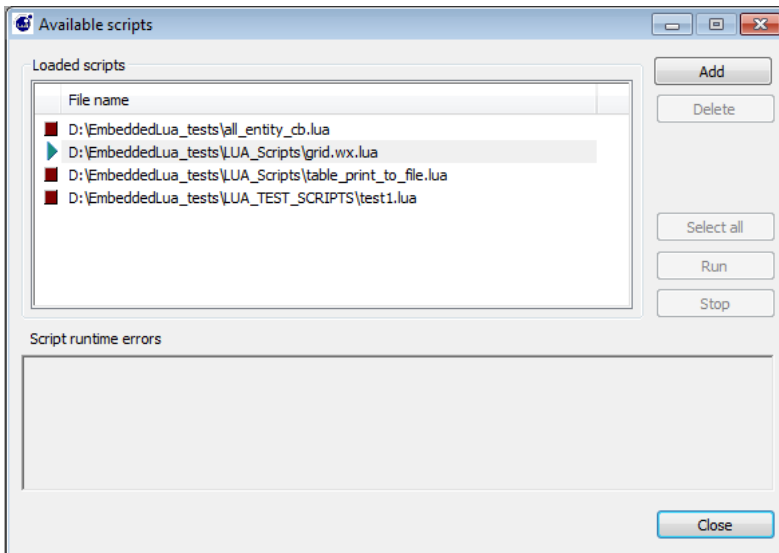

- Click **Add** to load a new script from a file;
- Click **Delete** to delete loaded scripts;
- Click **Select all** to select all available scripts;
- Click **Start** to run a loaded scripts;
- Click **Stop** to stop execution of a selected script.

The **Start** and **Stop** buttons are enabled depending on a script's current state.

Example of the result of a script execution:

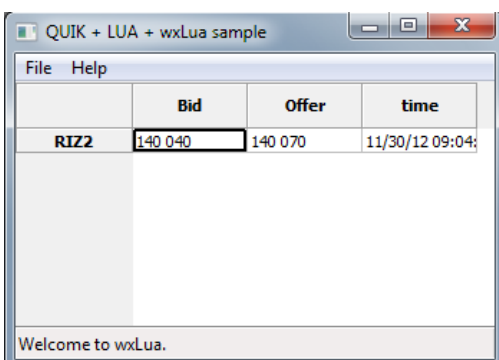

Errors occurred during script execution are displayed in the error area.

2. Workstation Functions Accessible from Lua Scripts

2.1 Service functions

2.1.1 isConnected

This function is used to get the connection status between the workstation and the server. The function returns '1' if a connection is established and '0' otherwise.

Function call syntax:

```
NUMBER isConnected()
```

2.1.2 getScriptPath

This function returns the path of the script from which it is called, without the final backslash ('\'). For example, C:\QuikFront\Scripts.

Function call syntax:

```
STRING getScriptPath()
```

Example:

```
path = getScriptPath()
```

2.1.3 getInfoParam

This function returns the values of the settings in the information window (menu **System / About program / Information window**).

Function call syntax:

```
STRING getInfoParam (STRING param_name)
```

The param_name parameter can take the values presented in the following table.

Parameter value	Description
VERSION	Program version
TRADEDATE	Trading date
SERVERTIME	Server time
LASTRECORDTIME	Time of last record

Parameter value	Description
NUMRECORDS	Number of records
LASTRECORD	Last record
LATERECORD	Delayed record
CONNECTION	Connection

Parameter value	Description
IPADDRESS	Server IP address
IPPORT	Server port
IPCOMMENT	Connection description
SERVER	Server info
SESSIONID	Trade session identifier
USER	User
USERID	User ID
ORG	Organisation
MEMORY	Memory in use
LOCALTIME	Current time
CONNECTIONTIME	Connection time
MESSAGESENT	Messages sent
ALLSENT	Bytes sent
BYTESENT	Bytes sent (only with data)

Parameter value	Description
BYTESPERSECSSENT	Sent per second
MESSAGESRECV	Messages received
BYTESRECV	Bytes received (only with data)
ALLRECV	Bytes received (total)
BYTESPERSECRECV	Received per second
AVGSENT	Average transfer rate
AVGRECV	Average receive rate
LASTPINGTIME	Last successfull ping time
LASTPINGDURATION	Data delay
AVGPINGDURATION	Average ping time
MAXPINGTIME	Maximum ping time
MAXPINGDURATION	Maximum ping duration

Example:

```
function main( )
    params = {"VERSION", "TRADEDATE", "SERVERTIME",
              "LASTRECORDTIME", "NUMRECORDS", "LASTRECORD", "LATERECORD",
              "CONNECTION", "IPADDRESS", "IPPORT", "IPCOMMENT",
              "SERVER", "SESSIONID", "USER", "USERID", "ORG", "MEMORY",
              "LOCALTIME", "CONNECTIONTIME", "MESSAGESENT", "ALLSENT",
              "BYTESENT", "BYTESPERSECSSENT", "MESSAGESRECV", "BYTESRECV",
              "ALLRECV", "BYTESPERSECRECV", "AVGSENT", "AVGRECV",
              "LASTPINGTIME", "LASTPINGDURATION", "AVGPINGDURATION",
              "MAXPINGTIME", "MAXPINGDURATION"}

    file = io.open("res.txt", "w+t")
    for key,v in ipairs(params) do
        file:write(v .. " = " .. getInfoParam (v) .. "\n")
    end
    file:close()
end
```


2.1.4 message




This function displays messages in a QUIK Workstation. The function returns 'nil' in case of an exception or when input parameters are incorrect. Otherwise, the function returns '1'.

The maximum length of messages about errors arising when executing the script and strings translated to the message() function cannot exceed 900 symbols.

Function call syntax:

NUMBER message(String message, NUMBER icon_type)

Parameters:

Parameter	Type	Description
message	STRING	String displayed in a QUIK Workstation message window
icon_type	NUMBER	The icon displayed in the message. Valid values and icons are: <ul style="list-style-type: none">– 1 (by default) – ;– 2 – ;– 3 – ; Optional parameter

Example:

```
message("test message")
message("test message", 1)
message("test\nmessage", 2)
message("connection state is " .. tostring(isConnected()), 3)
```

2.1.5 sleep

This function pauses a script. The function returns 'nil' if input parameters are incorrect. If successful, the function returns the timeout specified by the 'time' parameter.

Function call syntax:

NUMBER sleep(NUMBER time)

Parameters:

Parameter	Type	Description
time	NUMBER	The length of time to sleep in milliseconds

Example:

```
sleep(1000)    a script is paused for one second
```

Using the sleep function in callback functions is not recommended.

2.1.6 getWorkingFolder

This function returns the path to **info.exe** that executes the script, without a backslash ('\') at the end. For example, c:\QuikFront.

Function call syntax:

```
STRING getWorkingFolder()
```

Example:

```
path = getWorkingFolder()
```

2.1.7 PrintDbgStr

This function displays debug information.

Function call syntax:

```
PrintDbgStr(STRING s)
```

Example:

```
function main()
    PrintDbgStr("test1")
    PrintDbgStr("test2")
    PrintDbgStr("dbg from " .. getScriptPath())
End
```

2.2 Callback Functions

The functions described in this section are called when a QUIK terminal receives data from the server or to handle other external events.

IMPORTANT! Callback functions are processed in the main thread of the QUIK terminal. Therefore, users should optimize execution time of these functions.

Trading data is only passed to the script, if parameters for this security are requested from the server (as a part of a smart request or manually through the **System/ Data request / Available securities** dialogue) or if the corresponding Level II quotes table is opened.

Data can be requested from server by using QLua functions (see [3.17](#) about requesting a Level II Quotes table, and [3.18](#) about requesting the Quotes table's parameters).

2.2.1 OnFirm

A QUIK terminal calls this function when it receives the description of a new firm from the server.

Function call syntax:

```
OnFirm(TABLE firm)
```

Parameters:

Parameter	Type	Description
firm	TABLE	Firms

2.2.2 OnAllTrade

A QUIK terminal calls this function when an anonymous trade is received.

Function call syntax:

```
OnAllTrade(TABLE alltrade)
```

Parameters:

Parameter	Type	Description
alltrade	TABLE	Anonymous Trades

2.2.3 OnTrade

This function is called by a QUIK terminal when a trade is received or when changing parameters of the existing trade.

Function call syntax:

```
OnTrade(TABLE trade)
```

Parameters:

Parameter	Type	Description
trade	TABLE	Trade parameters table

2.2.4 OnOrder

This function is called by a QUIK terminal when it receives a new order or when the parameters of an existing order are changed.

Function call syntax:

```
OnOrder(TABLE order)
```

Parameters:

Parameter	Type	Description
order	TABLE	Table of orders parameters

2.2.5 OnAccountBalance

This function is called by a QUIK terminal when it receives changes in a current position for an account.

Function call syntax:

```
OnAccountBalance(TABLE acc_bal)
```

Parameters:

Parameter	Type	Description
acc_bal	TABLE	Current Positions for Client Accounts

2.2.6 OnFuturesLimitChange

This function is called by a QUIK terminal when it receives changes in derivatives market limits.

Function call syntax:

```
OnFuturesLimitChange(TABLE fut_limit)
```

Parameters:

Parameter	Type	Description
fut_limit	TABLE	Futures Limits

2.2.7 OnFuturesLimitDelete

This function is called by a QUIK terminal when a derivatives market limit is deleted.

Function call syntax:

```
OnFuturesLimitDelete(TABLE lim_del)
```

Parameters:

Parameter	Type	Description
lim_del	TABLE	Deleting Futures Limit

2.2.8 OnFuturesClientHolding

This function is called by a QUIK terminal when a derivatives market position is changed.

Function call syntax:

```
OnFuturesClientHolding(TABLE fut_pos)
```

Parameters:

Parameter	Type	Description
fut_pos	TABLE	Client Account Positions (Futures)

2.2.9 OnMoneyLimit

This function is called by a QUIK terminal when it receives changes in a client's cash limit.

Function call syntax:

```
OnMoneyLimit(TABLE mlimit)
```

Parameters:

Parameter	Type	Description
mlimit	TABLE	Cash Limits

2.2.10 OnMoneyLimitDelete

This function is called by a QUIK terminal when a cash limit is removed.

Function call syntax:

```
OnMoneyLimitDelete(TABLE mlimit_del)
```

Parameters:

Parameter	Type	Description
mlimit_del	TABLE	Removing Cash Limit

2.2.11 OnDepoLimit

This function is called by a QUIK terminal when it receives changes in a limit for securities.

Function call syntax:

```
OnDepoLimit(TABLE dlimit)
```

Parameters:

Parameter	Type	Description
dlimit	TABLE	Limits for Securities

2.2.12 OnDepoLimitDelete

This function is called by a QUIK terminal when a client's limit for securities is removed.

Function call syntax:

```
OnDepoLimitDelete(TABLE dlimit_del)
```

Parameters:

Parameter	Type	Description
dlimit_del	TABLE	Deleting Security Limit

2.2.13 OnAccountPosition

This function is called by a QUIK terminal when an account cash position changes.

Function call syntax:

```
OnAccountPosition(TABLE acc_pos)
```

Parameters:

Parameter	Type	Description
acc_pos	TABLE	Cash Positions

2.2.14 OnNegDeal

This function is called by a QUIK terminal when receiving a negdeal order or when changing parameters of the existing one.

Function call syntax:

```
OnNegDeal(TABLE neg_deals)
```

Parameters:

Parameter	Type	Description
neg_deals	TABLE	Negotiated Deal Orders

2.2.15 OnNegTrade

This function is called by a QUIK terminal when it receives a trade for execution or when changing parameters of the existing one.

Function call syntax:

```
OnNegTrade(TABLE neg_trade)
```



Parameters:

Parameter	Type	Description
neg_trade	TABLE	Trades for Execution

2.2.16 OnStopOrder

This function is called by a QUIK terminal when it receives a new stop order or when the parameters of an existing stop order are changed.

Function call syntax:

```
OnStopOrder(TABLE stop_order)
```

Parameters:

Parameter	Type	Description
stop_order	TABLE	Current Positions for Instruments

2.2.17 OnTransReply

This function is called by a QUIK terminal when it receives a response for a user transaction sent by means of Trans2quik.dll, QPILE, QLua or dynamical transactions loading from file. The function cannot be called when sending transactions manually via the interface of QUIK Workstation.

Function call syntax:

```
OnTransReply(TABLE trans_reply)
```

Parameters:

Parameter	Type	Description
trans_reply	TABLE	Transactions

2.2.18 OnParam

This function is called by a QUIK terminal when current parameters change.

```
OnParam (STRING class_code, STRING sec_code)
```


Parameters:

Parameter	Type	Description
class_code	STRING	Class code
sec_code	STRING	Security code

In this function, the user can call the `getParamEx()` function to obtain the value of the desired parameter.

Example:

```
function OnParam( class, sec )
    if class == "SPBFUT" and sec == "RIZ2" then
        tbid = getParamEx(class, sec, "bid")
        if tbid.param_value >= 130000 then
            message("Bid " .. tbid.param_image)
        end
    end
end
```

2.2.19 OnQuote

This function is called by a QUIK terminal when it receives changes in Level II quotes table.

`OnQuote(STRING class_code, STRING sec_code)`

Parameters:

Parameter	Type	Description
class_code	STRING	Class code
sec_code	STRING	Security code

To obtain the desired Level II Quotes table, call `getQuoteLevel2()`.

Example:

```
function OnQuote(class, sec )
    if class == "SPBFUT" and sec == "RIZ2" then
```

```

        ql2 = getQuoteLevel2(class, sec)
    end
end

```

2.2.20 OnDisconnected

This function is called by a QUIK terminal when it is disconnected from the QUIK server.

OnDisconnected()

2.2.21 OnConnected

This function is called by a QUIK terminal when upon establishing a connection to the QUIK server and receiving description at least of one class by terminal. If the terminal received a new class during the trading day the function is called again, at that the call parameter 'flag' takes value 'false'.

OnConnected(BOOLEAN flag)

2.2.22 OnCleanUp

This function is called by a QUIK terminal when the session changes or when qlua.dll is unloaded.

OnCleanUp()

Change of session is understood as changed identifier of session when connecting to QUIK server.

2.2.23 OnClose

This function is called by QUIK terminal in the following situations:

- Change of the QUIK server inside the trading session.
- Change of user who connects to the QUIK server inside the trading session.
- Change of session.

OnClose()

When performing several of the following conditions, the function OnCleanUp() is called by the QUIK terminal for each of them.

Uploading of qlua.dll file is understtod as getting disabled plygin QLua in dialog 'Component and plugin versions' (see 1.8. of Section 1 of User's manual for QUIK).

2.2.24 OnStop

This function is called by a QUIK terminal when the script is stopped from the control dialogue and when the QUIK terminal is closed.

[NUMBER time_out] OnStop(NUMBER signal)

The function returns the quantity of milliseconds that is available for a script to finish its operation. If the function doesn't return a number, timeout for script termination will be equal to 5 seconds.

After the time interval given to a script to terminate expires, the main() function is terminated. This might cause a loss of system resources.

Example:

```
function OnStop(s)
    stopped = true
    return 3000 - timeout of 3 seconds is set
end
function OnStop(s)
    stopped = true
    return '3000' - return value is not a number, timeout is 5 seconds
end
```

2.2.25 OnInit

This function is called by a QUIK terminal before calling the **main()** function. It receives the full path to the script being launched as an input parameter.

OnInit(STRING script_path)

In this function, the user can initialize all required variables and libraries before launching the main() thread.

2.2.26 main

Implements the main thread of execution of a script. The QUIK terminal creates a separate thread for this function. The script is running as long as the main() function is running. After the function exits, the script's status changes to 'stopped'. When the script is stopped, the event callback functions defined in the script are not called.

main()

Example:

```
function main()
    while true do
        message(os.date()) --displays the current date and time once a second
        sleep(1000)
    end
end
```

3. Functions for Interactions between Lua Scripts and QUIK Workstation

3.1 Functions for Accessing Rows in QUIK Tables

The functions from this group are used to access data contained in QUIK tables.

3.1.1 **getItem**

This function returns a Lua table with the data on the row with number 'Index' from the table named 'TableName'.

```
TABLE getItem (STRING TableName, DOUBLE Index)
```

Index of elements in a table begins from 0.

3.1.2 **getOrderByNumber**

This function returns a Lua table with the description of the parameters of [Orders table](#) and an order's index in the terminal's repository.

```
TABLE order NUMBER indx getOrderByNumber(STRING class_code, NUMBER order_id)
```

If there is no order with the specified number, the function returns nil.

3.1.3 **getNumberOf**

This function returns the number of rows in the table named 'TableName'.

```
NUMBER getNumberOf(STRING TableName)
```

3.1.4 **SearchItems**

This function allows for quick selection of elements from the terminal's repository and returns a table with indices of elements that match the search criteria.

```
TABLE SearchItems(STRING table_name, NUMBER start_index, NUMBER end_index, FUNCTION  
fn [, STRING params])
```

If an error occurs in fn function, SearchItems function stops working and returns "nil".

Parameters:

- **table_name** – the table name to search in;
- **start_index** – the index of the first element to be searched;
- **end_index** – the index of the last element to be searched;

- **fn** – a callback function that returns one of the following values:
 - true – current index is considered in the result;
 - false – current index is not considered in the result;
 - nil – the search stops, SearchItems function returns the table with indices found earlier including the current index.
- **params** defines the fields of an element of the **table_name** table that will be passed to the **fn** function. The fields should be separated by commas; spaces are ignored. If **params** is not set, the entire element will be passed to **fn**. An optional parameter.
For the examples of use of **params**, refer to [Appendix 4](#).

3.1.5 The tables used in the functions 'getItem', 'getNumberOf', and 'SearchItems'

TableName	Table
firms	Firms
classes	Classes
securities	Instruments
trade_accounts	Trading accounts
client_codes	Client codes*
all_trades	Anonymous Trades
account_positions	Cash Positions
orders	Orders
futures_client_holding	Client Account Positions (Futures)
futures_client_limits	Futures Limits
money_limits	Cash Limits
depo_limits	Limits for Securities
trades	Trades

TableName	Table
stop_orders	Stop Orders
neg_deals	Negotiated Deal Orders
neg_trades	Trades for Execution
neg_deal_reports	Reports on Trades for Execution
firm_holding	Current Positions for Instruments
account_balance	Current Positions for Client Accounts
ccp_holdings	Asset Commitments and Claims
rm_holdings	Currency: commitments and demands

* – `getNumberOf("client_codes")` returns the number of client codes available in the terminal;
`getItem("client_codes", i)` returns a string that contains a client code with index `i`, where `i` can have values from 0 to `getNumberOf("client_codes") - 1`

Example:

```
function main()
  n = getNumberOf("orders")
  order={}
  message("total ".. tostring(n) .. " of all orders", 1)
  for i=0,n-1 do
    order = getItem("orders", i)
    message("order: num=" .. tostring(order["order_num"]) .. " qty=" ..
tostring(order["qty"]) .. " value=" .. tostring(order["value"]), 1)
  end
end
```

This script displays information about all orders.

3.2 Functions for Accessing Available Parameters Lists

3.2.1 `getClassesList`

Returns a list of codes of classes that were transferred from the server during a connection session. Class codes in this list are separated by a comma, ','. The character ',' is always added to the end of a received string.

```
STRING getClassesList ()
```

Example:

```
list = getClassesList ()
```

In this example, the list variable will contain the following string:

```
OPTEXP,USDRUB,PSOPT,PSFUT,SPBFUT,
```

3.2.2 `getClassInfo`

Returns information about a class.

```
TABLE getClassInfo (STRING)
```

Returns a Lua table with a class description:

Parameter	Type	Description
firmid	NUMBER	Firm code
name	STRING	Class name
code	STRING	Class code
npars	NUMBER	Number of parameters in the class
nsecs	NUMBER	Number of securities in the class

3.2.3 `getClassSecurities`

This function returns a list of security codes for a specified list of class codes. Security codes in the list are separated by a comma, ','. The character ',' is always added to the end of a received string.

```
STRING getClassSecurities (STRING)
```

Example:


```
sec_list = getClassSecurities""SPBFU")
```

In this example, the `sec_list` variable will contain the following string:

```
RSH3,VBZ2,O4Z2,O2Z2,SiM3,SiH3,SiF3,RIH3,RIM3,LKH3,LKZ2,GDZ2,GMZ2,GZH3,GZZ2,EuZ2,EDZ2,  
SiZ2,RIZ2,
```

3.3 Function for Obtaining Cash Data

3.3.1 `getMoney`

Returns cash limit information.

TABLE `getMoney` (STRING `client_code`, STRING `firmid`, STRING `tag`, STRING `currcode`)

The function returns a Lua table with the following parameters:

Parameter	Type	Description
<code>money_open_limit</code>	NUMBER	Open cash limit
<code>money_limit_locked_nonmarginal_value</code>	NUMBER	Value of non-margin securities in buy orders
<code>money_limit_locked</code>	NUMBER	Cash volume locked in buy orders
<code>money_open_balance</code>	NUMBER	Open cash balance
<code>money_current_limit</code>	NUMBER	Current cash limit
<code>money_current_balance</code>	NUMBER	Current cash balance
<code>money_limit_available</code>	NUMBER	Available cash value

3.3.2 `getMoneyEx`

Returns the information on cash limits of a specified type.

TABLE `getMoneyEx`(STRING `firmid`, STRING `client_code`, STRING `tag`, STRING `currcode`,
NUMBER `limit_kind`)

The function returns a Lua table with the Cash limits table parameters. If an error occurs, the function returns 'nil'.

3.4 Function for Obtaining Security Limit Information

3.4.1 getDepo

Returns security limit information.

```
TABLE getDepo (STRING client_code, STRING firmid, STRING sec_code, STRING trdaccid )
```

The function returns a Lua table with the following parameters:

Parameter	Type	Description
depo_limit_locked_buy_value	NUMBER	Value of instruments locked for buying
depo_current_balance	NUMBER	Current securities balance
depo_limit_locked_buy	NUMBER	Number of lots of securities locked for buying
depo_limit_locked	NUMBER	Number of locked lots of securities
depo_limit_available	NUMBER	Quantity of available securities
depo_current_limit	NUMBER	Current limit for securities
depo_open_balance	NUMBER	Opening balance for securities
depo_open_limit	NUMBER	Open limit for securities

3.4.2 getDepoEx

Returns the information on security limits of a specified type.

```
TABLE getDepoEx(STRING firmid, STRING client_code, STRING sec_code, STRING trdaccid,  
NUMBER limit_kind)
```

The function returns a Lua table with the [Securities limits table](#) parameters. If an error occurs, the function returns 'nil'.

3.5 Function for Obtaining Futures Limits Information

3.5.1 getFuturesLimit

Returns the information on Futures Limits.

```
TABLE getFuturesLimit(STRING firmid, STRING trdaccid, NUMBER limit_type, STRING  
currcode)
```

When it is necessary to obtain information on a futures limit without currency, curr_code value must be a blank row.

The function returns a Lua table with the parameters of a [futures limit](#). If an error occurs, the function returns 'nil'.

3.6 Function for Obtaining Futures Positions Information

3.6.1 getFuturesHolding

Returns the information on Futures Positions.

TABLE getFuturesHolding(String firmid, String trdaccid, String sec_code, NUMBER type)

The function returns a Lua table with the parameters of the [Table of futures positions](#). If an error occurs, the function returns 'nil'.

3.7 Function for Obtaining Instrument Information

3.7.1 getSecurityInfo

This function returns information on a security.

TABLE getSecurityInfo (String class_code, String sec_code)

The function returns a Lua [Instruments table](#).

3.8 Function for Obtaining a trading session date

3.8.1 getTradeDate

Returns the date of the current trading session.

TABLE getTradeDate ()

The function returns a Lua table with the following parameters:

Parameter	Type	Description
date	STRING	Trading date in the form of <DD.MM.YYYY>
year	NUMBER	Year
month	NUMBER	Month
day	NUMBER	Day

3.9 Function for Obtaining Level II Quotes Table for Specified Class and Security

3.9.1 getQuoteLevel2

This function returns Level II quotes table for the specified class and security.

TABLE getQuoteLevel2 (STRING class_code, STRING sec_code)

The function returns a Lua table with the following parameters:

In the absence of bid and offer the function returns table without bid and offer parameters.

Parameter	Type	Description
bid_count	STRING	Number of bids. In the absence of bid, 0 value is returned
offer_count	STRING	Number of offers. In the absence of offer, 0 value is returned
bid	TABLE	Bids (buying). In the absence of bid, a blank row is returned
offer	TABLE	Offers (selling). In the absence of offer, a blank row is returned

The 'bid' and 'offer' tables have the following structure:

Parameter	Type	Description
price	STRING	Buy/Sell price
quantity	STRING	Quantity in lots

3.10 Functions for Working with Charts

3.10.1 getLinesCount

This function returns the number of lines on a chart (indicator) for a specified identifier.

NUMBER getLinesCount (STRING tag)

Returns the number of lines on a chart.

3.10.2 getNumCandles

This function returns the number of candlesticks for a specified identifier.

NUMBER getNumCandles (STRING tag)

Returns the number of candlesticks for a specified identifier.

3.10.3 getCandlesByIndex

This function returns information about candlesticks for an identifier (this plug-in does not request data for chart plotting; therefore, to get access to the chart, it must be open):

Function call syntax:

```
TABLE t, NUMBER n, STRING l getCandlesByIndex (STRING tag, NUMBER line, NUMBER
first_candle, NUMBER count)
```

Parameters:

- **tag** - a string identifier of a chart or an indicator;
- **line** - a line number in a chart or an indicator. The number of the first line is 0;
- **first_candle** - the index of the first candlestick. The index of the first (leftmost) candlestick is 0;
- **count** - the number of candlesticks to be returned.

Returns:

- **t** – the table that contains requested candlesticks;
- **n** – the number of candlesticks in **t**;
- **l** – the chart legend (caption).

3.10.4 CreateDataSource

The function is intended to create a Lua table and provides working with candlesticks received from QUIK server and reacting to its changes.

Function call syntax:

```
TABLE data_source, STRING error_desc CreateDataSource (STRING class_code, STRING
sec_code, NUMBER interval [, STRING param])
```

Parameters:

- **class_code** – code of a class;
- **sec_code** – code of a security;
- **interval** – interval of the required chart;
- **param** – optional parameter. If not specified, the data is required on the basis of Time and Sales table; if the parameter is specified then data is required on this parameter.

The function returns **data_source** table if executed successfully. If incorrect class code or parameter is specified than the function returns “nil”. At that **data_sourc** contains description of the error.

List of constants for transmission to parameter **interval**:

Parameter	Value of interval	Parameter	Value of interval
INTERVAL_TICK	Tick data	INTERVAL_M20	20 minutes
INTERVAL_M1	1 minute	INTERVAL_M30	30 minutes
INTERVAL_M2	2 minutes	INTERVAL_H1	1 hour
INTERVAL_M3	3 minutes	INTERVAL_H2	2 hours
INTERVAL_M4	4 minutes	INTERVAL_H4	4 hours
INTERVAL_M5	5 minutes	INTERVAL_D1	1 day
INTERVAL_M6	6 minutes	INTERVAL_W1	1 week
INTERVAL_M10	10 minutes	INTERVAL_MN1	1 month
INTERVAL_M15	15 minutes		

Function **CreateDataSource** returns Lua table with parameters:

Parameter	Type	Description
SetUpdateCallback	function	Allows a user to set callback function for processing changed candlesticks
O	function	Get value Open for the selected candlestick
H	function	Get value High for the selected candlestick
L	function	Get value Low for the selected candlestick
C	function	Get value Close for the selected candlestick
V	function	Get value Volume for the selected candlestick
T	function	Get value Time for the selected candlestick
Size	function	Returns the current size (number of candlesticks in the data source)
Close	function	Deletes the data source, unsubscribes from the received data
SetEmptyCallback	function	Allows a user to receive data from server without specifying the callback function

For example:

```
ds1 = CreateDataSource("SPBFUT", "RIU3", INTERVAL_M1, "last")
ds2 = CreateDataSource("SPBFUT", "RIU3", INTERVAL_M1)
ds3 = CreateDataSource("SPBFUT", "RIU3", INTERVAL_M1, "bid")
```

Detailed description of all functions is given below.

Function SetUpdateCallback

Function call syntax:

```
BOOLEAN res SetUpdateCallback (FUNCTION callback_function)
```

As a parameter takes the callback function:

Format of callback function:

```
function call_back(NUMBER index)
```

Parameters:

- **index** – number of changes candlestick. Candlestick indexes start from 1.

The function returns “true” is executed successfully, otherwise “false”.

Example of receiving time from a candlestick:

```
function cb( index )
local t = ds:T(index)
local _str = string.format("#%d of %d\t%.4f\t%.4f\t%.4f\t%.4f\t%.4f %02d.%02d.%04d
%02d.%02d.%02d.%04",
index, ds:Size(), ds:O(index), ds:H(index), ds:L(index),
ds:C(index), ds:V(index),
t.day, t.month, t.year, t.hour, t.min, t.sec, t.ms)
Log(file, _str)
end
ds: SetUpdateCallback (cb)
```

Functions O, H, L, C, V, T

Functions as a parameter takes a candlestick index and return a corresponding value. Time of candlestick returns within milliseconds in the form of a table with fields:

```
{year, month, day, week_day, hour, min, sec, ms, count }
```

Where:

- **count** – a quantity of tick intervals per second. Must be a value between 1 and 10000 inclusively.

For example:

```
Open = ds:O(1)
High = ds:H(1)
Low = ds:L(1)
Close = ds:C(1)
Volume = ds:V(1)
week_day = ds:T(1).week_day
count = ds:T(1).count
```

Function Size

Function returns a current number of candlesticks in the data source. Function call syntax:

NUMBER Size()

For example:

```
ds:Size()
```

Function Close

Function closes the data source and the terminal stops receiving the data from server.

Function call syntax:

BOOLEAN Close()

For example:

```
ds:Close()
```

The function returns “true” if executed successfully.

Function SetEmptyCallback

Function allows to receive the data from the server.

Function call syntax:

BOOLEAN SetEmptyCallback()

The function returns “true” if executed successfully, otherwise “false”.

For example:

```
ds:SetEmptyCallback()
```

3.11 Functions for Working with Orders

These functions are intended for creating orders and sending them into the trading system.

3.11.1 sendTransaction

The function is intended to send transactions to trading system.

Function call syntax:

```
STRING result sendTransaction(TABLE transaction)
```

Parameters:

- **result** – row containing an error text, if it happened when processing a transaction.
- **transaction** – table with parameters of transaction.

This function sends a transaction to the QUIK server. If an error occurs during processing a transaction in the QUIK terminal, the function returns the description of the error. Otherwise, the transaction will be sent to the server.

The result of the transaction is returned in the **OnTransReply** callback function.

The input parameter for this function is a table in which the names and values of the fields correspond to the parameters used in the .tri file (see QUIK User's Manual, Section 6: Working with other programs, paragraph 6.11.3).

IMPORTANT! For correct data processing, numeric values (price, quantity, transaction identifier, etc) must be passed as strings.

Example of filling in fields of **transaction** table:

```
transaction = {  
  ACCOUNT="YY0070001234",  
  CLIENT_CODE="XXX",  
  TYPE="M",  
  TRANS_ID="7",  
  CLASSCODE="TQBR",  
  SECCODE="HYDR",  
  ACTION="NEW_ORDER",  
}
```

```
OPERATION="B",  
PRICE="0",  
QUANTITY="15"  
}
```

3.11.2 CalcBuySell

The function is intended to calculate the maximum possible number of lots in order.

Function call syntax:

```
TABLE NUMBER qty, NUMBER comission CalcBuySell(String class_code, String sec_code,  
String client_code, String account, NUMBER price, BOOLEAN is_buy, BOOLEAN is_market)
```

Parameters:

- **class_code** – class code;
- **sec_code** – security code;
- **client_code** – client code;
- **account** – depo account;
- **price** – price;
- **is_buy** – attribute of a buy order ("true" – to buy, otherwise – to sell);
- **is_market** – attribute of a market order ("true" – market order, otherwise limit order). Optional parameter, value by default: "false".

If is_market=true, then establish price=0, otherwise the maximum possible number of lots will be calculated in order at price of 'price' parameter.

Example:

```
function main()  
    local bs = CalcBuySell  
    assert(bs, "No function!!")  
    while not stopped do  
        qty, comiss = bs("BQUOTE", "AFLT", "Q3", "S01-00000F00", 10, true, false)  
        message("qty = " .. qty .. ", COM = " .. comiss, 2)  
        sleep(1000)  
    end  
end
```

3.12 Function for Obtaining Values from Quotes Table

3.12.1 `getParamEx`

This function returns all exchange parameters from a Quotes Table. This function can be used to obtain any value from a Quotes Table for specified class and security codes.

Function call syntax:

```
TABLE getParamEx (STRING class_code, STRING sec_code, STRING param_name)
```

The function returns a Lua table with the following parameters:

Parameter	Type	Description
-----------	------	-------------

param_type	STRING	The data type of a parameter from the Quotes Table. Valid values: <ul style="list-style-type: none">– 1 – DOUBLE;– 2 – LONG;– 3 – CHAR;– 4 – enumerable type;– 5 – time;– 6 – date
param_value	STRING	Parameter value. For param_type = 3, value of the parameter is equal to 0, in other cases numerical data type. For enumerable types, the value equals sequence number in the enumeration
param_image	STRING	The string value of the parameter as it is presented in the tables. The string representation takes into account numeric and decimal separators. For enumerable types, their corresponding string values are returned
result	STRING	Result of executing operation. Valid values: <ul style="list-style-type: none">– 0 – error;– 1 – parameter is found

3.12.2 `getParamEx2`

This function returns all exchange parameters from a Quotes Table with a possibility to deny particular parameters requested by function [ParamRequest](#). To deny receiving a parameter, use function [CancelParamRequest](#).

Function call syntax:

```
TABLE getParamEx2 (STRING class_code, STRING sec_code, STRING param_name)
```

Parameters:

- **class_code** – class code;
- **sec_code** – security code;

- **param_name** – parameter code.

The function returns a Lua table with parameters analogous to those returned by function `getParamEx` (see [3.12.1](#)).

3.12.3 Getting the values of Quotes table

To get the values of the Quotes table, use functions `getParamEx()` or `getParamEx2()`. Current values of parameters can be received if the data was requested. To request the data, use the following methods:

- Select **System / Data request / Available securities...** menu items and specify the required parameters and instruments for a class;
- Select the **According to settings of tables opened by the user** option in the QUIK workstation (**System / Settings / General settings...** menu items, **Program / Receiving data** sections) and open the Quotes table the required parameters and instruments for a class;
- Automatically from Lua script using the [ParamRequest](#) or [CreateDataSource](#) functions, if the **According to settings of tables opened by the user** option in the QUIK workstation (**System / Settings / General settings...** menu items, **Program / Receiving data** sections) is selected.

The QUIK workstation automatically requests parameters required to correctly calculate the limits if the “According to settings of tables opened by the user” option is selected in the QUIK workstation (System / Settings / General settings... menu items, Program / Receiving data sections).

3.13 Functions for Obtaining Parameters of Client Portfolio Table

3.13.1 getPortfolioInfo

This function is used for obtaining parameter values from the ‘Client portfolio’ table for the specified firm identifier ‘firm_id’ and client code ‘client_code’.

Function call syntax:

```
TABLE getPortfolioInfo (STRING firm_id, STRING client_code)
```

The function returns a Lua table with the following parameters:

Nº	Parameter	Type	Description	
1	is_leverage	STRING	Attribute of monitoring positions type. Valid values: <ul style="list-style-type: none"> – MLim: scheme of monitoring a position “by leverage” is used, the leverage is calculated based on the Incoming limit value; – MP: scheme of monitoring a position “by leverage” is used when the leverage is expressly stated; – Mpos: positions monitoring scheme “open position limit” is used; – MD: position monitoring scheme “by discounts” is used; – F: position monitoring scheme “futures market” scheme is used. For clients of derivatives market without the unified cash position; – <blank>: positions monitoring scheme “by limit” is used 	Client type
2	in_assets	STRING	Estimation of a client’s assets before beginning of trading	Open assets
3	leverage	STRING	Leverage If it is not specified explicitly, the value equals the ratio of Opening limit to Opening assets	Leverage
4	open_limit	STRING	Estimation of the maximum value of borrowed assets before beginning of trading	Open limit
5	val_short	STRING	Estimated value of short positions This value is always negative	ValShort
6	val_long	STRING	Estimated value of long positions	ValLong
7	val_long_margin	STRING	Estimated value of long positions for marginal securities used as collateral	ValLongMargin
8	val_long_asset	STRING	Estimated value of long positions for non-marginal securities included as collateral	ValLongAsset
9	assets	STRING	Estimated value of a client’s assets for current positions and prices	Cur. assets
10	cur_leverage	STRING	Current leverage	Cur. leverage
11	margin	STRING	Margin ratio as a percentage	Margin ratio
12	lim_all	STRING	Current estimated value of maximum quantity of borrowed assets	Cur. Limit
13	av_lim_all	STRING	Estimated value of borrowed assets available for further opening of positions	AvLimAll
14	locked_buy	STRING	Estimated value of assets in buy orders	Lock. buy

Nº	Parameter	Type	Description	
15	locked_buy_margin	STRING	Estimated value of assets in buy orders for marginal securities used as collateral	Lock. margin. buy
16	locked_buy_asset	STRING	Value of assets in buy orders for non-marginal securities accepted as collateral	Lock. coll. buy
17	locked_sell	STRING	Estimated value of assets in sell orders for marginal securities	Lock. sell
18	locked_value_coef	STRING	Value of assets in buy orders for non-marginal securities	Lock. non-margin. buy
19	in_all_assets	STRING	Value of all client positions adjusted to the closing prices from the preceding trading session including positions for non-marginal securities	InAllAssets
20	all_assets	STRING	Current estimated value for all positions of a client	AllAssets
21	profit_loss	STRING	Absolute value of change in price of all positions of a client	ProfitLoss
22	rate_change	STRING	Relative value of change in price of all positions of a client	RateChange
23	lim_buy	STRING	Estimated cash volume available for buying marginal securities	LimBuy
24	lim_sell	STRING	Estimated value of marginal securities available for selling	LimSell
25	lim_non_margin	STRING	Estimated cash volume available for buying non-marginal securities	LimNonMargin
26	lim_buy_asset	STRING	Estimated cash assets available for purchasing securities used as collateral	LimBuyAsset
27	val_short_net	STRING	Estimated value of short positions The discount coefficient is not used in calculations**	Short (net)
28	val_long_net	STRING	Estimated value of long positions. The discount coefficient is not used in calculations**	Long (net)
29	total_money_bal	STRING	Sum of funds balance for all limits, excluding funds locked for commitments, in the selected settlement currency	Total cash balance
30	total_locked_money	STRING	Sum of locked funds from all cash limits of a client calculated in the settlement currency using cross rates from the server	Total locked cash

Nº	Parameter	Type	Description	
31	haircuts	STRING	Total discounts on the value of long (only for collateral securities) and short security positions, discounts of the correlation between instruments, as well as discounts on owed currencies not covered by security collateral in the same currencies	Haircuts
32	assets_without_hc	STRING	Total value of cash balances, prices of long positions for the securities held as collateral, and prices of short positions, without taking into account discount factors, netting of securities value within a unified position or correlation between instruments	Assets w/o HC
33	status_coef	STRING	Ratio between the sum of discounts and current assets without discounts	Status coef.
34	varmargin*	STRING	Current variation margin for a client's positions for all instruments	Variat. margin
35	go_for_positions*	STRING	Cash paid to cover all open positions on the derivatives market	Curr. clear pos.
36	go_for_orders*	STRING	Estimated value of assets in orders on the derivatives market	Curr. clear ord.
37	rate_futures	STRING	Ratio between disposal value of a portfolio and collateral on the derivatives market	Assets/Curr. clear pos.
38	is_qual_client	STRING	This attribute shows that the client is a 'qualified' client who can borrow assets with leverage of 1:3. Valid values: 'HighRisk' means qualified, <blank> means not qualified	HighRisk
39	is_futures	STRING	Client account on FORTS, if there is a unified position; otherwise this field will be empty	Fut. trade account
40	curr_tag	STRING	Actual current settlement parameters for this row in the format <Currency>-<Settlement tag>. Example: 'SUR-EQTV'	Calc. parameters

* – parameter is filled in for clients with the configured unified cash position and for clients of derivatives market without the unified cash position.

** – for details on discount factors, see Section 7 of Administrator's manual for Limits calculation library.

3.13.2 getPortfolioInfoEx

This function is used for obtaining parameters from the 'Client portfolio' table for the specified firm identifier 'firm_id', client code 'client_code' and limit type 'limit_kind'. Function call syntax:

TABLE getPortfolioInfoEx (STRING firm_id, STRING client_code, NUMBER limit_kind)

To receive parameters of Client portfolio table for clients of derivatives market without the unified cash position, use trading account on derivatives market as value of 'client_code' and 0 as value of 'limit_kind'.

Returns a Lua table with the parameters from the 'Client portfolio' table. For the description of parameters, see [3.13.1](#). The function also returns the following parameters:

Nº	Parameter	Type	Description	
1	init_margin	STRING	Value of the initial margin. The parameter is filled for MD clients	Init.margin
2	min_margin	STRING	Value of the minimum margin. The parameter is filled for MD clients	Min.margin
3	corrected_margin	STRING	Value of the corrected margin. The parameter is filled for MD clients	Corr.margin
4	client_type	STRING	Client type	Client type
5	portfolio_value	STRING	Portfolio value. For MD clients the value for rows with the maximum limit kind returns	Portfolio value
6	*start_limit_open_pos	STRING	Open positions limit for beginning of day	OpenPosLimBegin
7	*total_limit_open_pos	STRING	Open positions limit	OpenPosLim
8	*limit_open_pos	STRING	Planned net positions	PlanNetPos
9	*used_lim_open_pos	STRING	Current net positions	CurrNetPos
10	*acc_var_margin	STRING	Accrued variation margin	AccVarMarg
11	*cl_var_margin	STRING	Variation margin on the basis of intermediate clearing	AccVarMargIntCl
12	*opt_liquid_cost	STRING	Options liquidation value	OptLiquidVal
13	*fut_asset	STRING	Amount of estimated client's assets on derivatives market	FutMrkAssets
14	*fut_total_asset	STRING	Total amount of own client's assets on stock and derivatives markets	TotalMrkAssets
15	*fut_debt	STRING	Current debt on derivatives market	CurrDebdtFut
16	*fut_rate_asset	STRING	Funds adequacy	FundsAdeq
17	*fut_rate_asset_open	STRING	Funds adequacy (for open positions)	FundsAdeq (OpenPos)

Nº	Parameter	Type	Description	
18	*fut_rate_go	STRING	Liquidity coefficient of collateral	ColLiquidCoef
19	*planned_rate_go	STRING	Expected liquidity coefficient of collateral	ExColLiquidCoef
20	*cash_leverage	STRING	Cash Leverage	Cash Leverage
21	*fut_position_type	STRING	Type of position on derivatives market. Valid values: _ 0 – no position; _ 1 – futures; _ 2 – options; _ 3 – futures and options	PosTypeFutMrk
22	*fut_accured_int	STRING	Accrued interest with consideration of premium on options and exchange fees	AccruedInt

* – parameter is filled in for clients with the configured unified cash position and for clients of derivatives market without the unified cash position.

3.14 Functions for Obtaining Parameters from 'Buy/Sell' Table

3.14.1 getBuySellInfo

This function is used for obtaining parameters from the 'Buy/Sell' table. Function call syntax:

```
TABLE getBuySellInfo (STRING firm_id, STRING client_code, STRING class_code, STRING sec_code, NUMBER price)
```

This functions returns a Lua table that contains parameters from the 'Buy/Sell' QUIK table which indicate the possibility of buying or selling the specified security 'sec_code' of class 'class_code' by the client 'client_code' of the firm 'firmid' at the price 'price'. If the price is '0', the best bid/offer values are used.

Parameters:

Nº	Parameter	Type	Description
1	is_margin_sec	STRING	This attribute specifies if the instrument is marginal. Valid values: _ 0 – non margin; _ 1 – margin
2	is_asset_sec	STRING	This attribute shows if the instrument belongs to the list of securities used as collateral. Valid values: _ 0 – is not used; _ 1 – is used

Nº	Parameter	Type	Description
3	balance	STRING	Current instrument position, in lots
4	can_buy	STRING	Estimated number of lots available for buying at the specified price *
5	can_sell	STRING	Estimated number of lots available for selling at the specified price *
6	position_valuation	STRING	Valuation of an instrument position according to bid/offer prices
7	value	STRING	Evaluated position value according to last trade price
8	open_value	STRING	Evaluated client's position value calculated according to the closing price of the previous trading session
9	lim_long	STRING	Maximum position size for this instrument that can be accepted as collateral for long positions
10	long_coef	STRING	Discount factor for long positions for this instrument
11	lim_short	STRING	The maximum size of a short position for this instrument
12	short_coef	STRING	Discount factor for short positions for this instrument
13	value_coef	STRING	Evaluated position value according to the last trade price taking into account the discount factor
14	open_value_coef	STRING	Evaluated value of client's position calculated according to the closing price of the previous trading session taking into account discount factors
15	share	STRING	Percentage of the position value for this instrument to the total value of the client's assets calculated according current prices
16	short_wa_price	STRING	Weighted average price of short positions for instruments
17	long_wa_price	STRING	Weighted average price of long positions for instruments
18	profit_loss	STRING	Difference between the weighted average price of buying securities and their market price
19	spread_hc	STRING	Coefficient of correlation between instruments
20	can_buy_own	STRING	Maximum number of securities in a buy order for this instrument in this class using client's own assets at the best offer price
21	can_sell_own	STRING	Maximum number of securities in a sell order for this instrument in this class from client's own assets at the best bid price

(*) Depending on QUIK server settings, this value can be expressed in lots or in units Contact your broker for information about the unit of measurement.

3.14.2 getBuySellInfoEx

This function is used for obtaining parameters from the 'Buy/Sell' table. Function call syntax:

```
TABLE getBuySellInfoEx (STRING firm_id, STRING client_code, STRING class_code, STRING  
sec_code, NUMBER price)
```

This function returns a Lua table that contains parameters from the 'Buy/Sell' QUIK table which indicate the possibility of buying or selling the specified security 'sec_code' of class 'class_code' by the client 'client_code' of the firm 'firmid' at the price 'price'. If the price is '0', the best bid/offer values are used. For the description of returned parameters, see [3.14.1](#).

The function also returns the following parameters:

Nº	Parameter	Type	Description
1	limit_kind	NUMBER	Limit type Valid values: positive integers, starting from 0, corresponding to limit kinds from the Limits for securities table: 0 – T0; 1 – T1; 2 – T2, etc.
2	d_long	STRING	Effective initial discount for a long position. The parameter is filled for MD clients
3	d_min_long	STRING	Effective minimum discount for a long position. The parameter is filled for MD clients
4	d_short	STRING	Effective initial discount for a short position. The parameter is filled for MD clients
5	d_min_short	STRING	Effective minimum discount for a short position. The parameter is filled for MD clients
6	client_type	STRING	Client type. Valid values: <ul style="list-style-type: none">– 1 – MLim;– 2 – MLev;– 3 – Mpos;– 4 – MD
7	is_long_allowed	STRING	Attribute of a security allowed to be bought at borrowed funds. Valid values: <ul style="list-style-type: none">– 1 – allowed;– 0 – not allowed. The parameter is filled for MD clients
8	is_short_allowed	STRING	Attribute of a security allowed to be sold at borrowed funds. Valid values: <ul style="list-style-type: none">– 1 – allowed;– 0 – not allowed. The parameter is filled for MD clients

3.15 Functions for Working with QUIK Workstation Tables

QUIK Workstation tables created with Lua scripts provide the following features:

- drag-and-drop mode;
- user filters;
- conditional formatting;
- tabs;
- searching within a table;
- previewing and printing.

Below is the list of features that are not supported for the tables created in Lua:

- tables cannot be saved into a configuration file;
- editing dialogue window is not available;
- no table context menu (except for the **Move to tab** item);
- tables cannot be copied;
- a default table window title cannot be set;
- data from tables cannot be exported;
- tables do not support hotkeys.

3.15.1 AddColumn

This function adds columns to a table with the 't_id' identifier.

Function call syntax:

```
NUMBER AddColumn (NUMBER t_id, NUMBER iCode, STRING name, BOOLEAN is_default,  
NUMBER par_type, NUMBER width)
```

Parameters:

- **iCode** – code of the parameter displayed in a column;
- **name** – the name of a column;
- **is_default** – this parameter is not used;
- **par_type** – data type in a column; the value can be one of the following constants:
 - QTABLE_INT_TYPE – integer;
 - QTABLE_DOUBLE_TYPE – double;
 - QTABLE_INT64_TYPE – 64-bit integer;
 - QTABLE_CACHED_STRING_TYPE – cached string;

- _ QTABLE_TIME_TYPE – time;
- _ QTABLE_DATE_TYPE – date;
- _ QTABLE_STRING_TYPE – string.

- **width** – width in nominal units.

This function returns '1' if the column is added to a table and '0' otherwise.

3.15.2 AllocTable

This function creates a structure that defines a table.

Function call syntax:

```
NUMBER AllocTable()
```

This function returns an integer table identifier that can be used to work with this table.

3.15.3 Clear

This function deletes the content of the table with the id 't_id'.

Function call syntax:

```
BOOLEAN Clear (NUMBER t_id)
```

The function returns 'true' if completed successfully, otherwise 'false'.

3.15.4 CreateWindow

This function creates a window for the table with the id 't_id'.

Function call syntax:

```
NUMBER CreateWindow(NUMBER t_id)
```

This function returns '1' if a window is created successfully, and '0' otherwise.

3.15.5 DeleteRow

This function deletes the row with the specified key from the table with the id 't_id'.

Function call syntax:

```
BOOLEAN DeleteRow(NUMBER t_id, NUMBER key)
```

The function returns 'true' if completed successfully, otherwise 'false'.

3.15.6 DestroyTable

This function closes the window of the table with the specified id.

Function call syntax:

```
BOOLEAN DestroyTable(NUMBER t_id)
```

All display data is deleted when a window is closed.

This function returns 'true' if executed successfully and 'false' otherwise.

3.15.7 InsertRow

This function inserts a row with the specified key to the table with the id 't_id'.

Function call syntax:

```
NUMBER InsertRow(NUMBER t_id, NUMBER key)
```

To add data to a new table, first execute this function with the 'key' parameter equal to '-1'. The row will be added to the end of the table.

The function returns the index of the added row if executed successfully and -1 otherwise.

If the key is larger than the current number of rows, the new row will be added to the end of the table.

3.15.8 IsWindowClosed

This function returns 'true' if the window with the table 't_id' is closed.

The IsWindowClosed function will return "false" if it is called inside the callback function which is set using SetTableNotificationCallback().

Function call syntax:

```
BOOLEAN IsWindowClosed(NUMBER t_id)
```

The function returns 'nil' in case of failure.

The window can be opened again with the **CreateWindow** function (for further details, see [3.15.4](#)).

3.15.9 GetCell

This function returns a table with the data from a cell with the specified row key and column code in the table 't_id'.

Function call syntax:

```
TABLE GetCell(NUMBER t_id, NUMBER key, NUMBER code)
```

Table parameters:

- **image** – string representation of the cell value,
- **value** – the numeric cell value.

If input parameters were set incorrectly, the function returns 'nil'.

3.15.10 GetTableSize

This function returns the number of rows and columns in the table with the id 't_id'.

Function call syntax:

```
NUMBER rows, NUMBER col GetTableSize (NUMBER t_id)
```

User filters applied to the table do not affect the number of rows returned. Headers and the first fixed column are not included in the returned values. The function returns 'nil' in case of failure.

3.15.11 GetWindowCaption

This function gets a current window caption.

Function call syntax:

```
STRING GetWindowCaption(NUMBER t_id)
```

The function returns 'nil' in case of failure.

3.15.12 GetWindowRect

This function returns the coordinates of the upper left and lower right corners of the window that contains the table 't_id'.

Function call syntax:

```
NUMBER top, NUMBER left, NUMBER bottom, NUMBER right GetWindowRect(NUMBER t_id)
```

The function returns 'nil' in case of failure.

3.15.13 SetCell

This function sets the value of the cell with the specified row key and column code in the table 't_id'.

Function call syntax:

```
BOOLEAN SetCell(NUMBER t_id, NUMBER key, NUMBER code, STRING text, NUMBER value)
```

The 'text' parameter is the string representation of the 'value' parameter. The 'value' parameter is optional and equals '0' by default. The 'value' parameter is not set for columns with string data types.

If the 'value' parameter is not set for cells of other types, then sorting, filtering and conditional formatting will not work correctly for columns that contain such cells (see [Appendix 2](#)).

If successful, this function returns 'true' and 'false' otherwise.

3.15.14 SetWindowCaption

This function sets a new window caption.

Function call syntax:

```
BOOLEAN SetWindowCaption(NUMBER t_id, STRING str)
```

This function returns 'true' if executed successfully and 'false' otherwise.

3.15.15 SetWindowPos

This function sets the position for the window with the table 't_id'. The coordinates of the upper left corner are set to x and y, and the sizes of the window are set to dx, dy.

Function call syntax:

```
BOOLEAN SetWindowPos(NUMBER t_id, NUMBER x, NUMBER y, NUMBER dx, NUMBER dy)
```

This function returns 'true' if executed successfully and 'false' otherwise.

3.15.16 SetTableNotificationCallback

Defines a callback function to process table events.

IMPORTANT! Calling Clear and DestroyTable functions for t_id inside the callback function f_cb, assigned for the table with this t_id is not allowed.

Function call syntax:

```
NUMBER SetTableNotificationCallback (NUMBER t_id, FUNCTION f_cb)
```

Parameters:

- **t_id** – a table identifier;
- **f_cb** – a callback function to process table events.

This function returns '1' if executed successfully and '0' otherwise.

Table event callback call syntax:

```
FUNCTION (NUMBER t_id, NUMBER msg, NUMBER par1, NUMBER par2)
```

Parameters:

- **t_id** – the identifier of the table whose message is to be processed;
- **par1** and **par2** – the values of these parameters are determined by the message type;
- **msg** – a message code.

Possible event codes:

- **QTABLE_LBUTTONDOWN** – the table is clicked; par1 contains the row number, and par2 contains the column number;
- **QTABLE_RBUTTONDOWN** – the table is right-clicked; par1 contains the row number, and par2 contains the column number;
- **QTABLE_LBUTTONDBLCLK** – the table is double-clicked; par1 contains the row number, and par2 contains the column number;
- **QTABLE_RBUTTONDBLCLK** – the table is right double-clicked, par1 contains the row number, and par2 contains the column number;
- **QTABLE_SELCHANGED** – the current (highlighted) row is changed; par1 is the number of the new highlighted row;
- **QTABLE_CHAR** – a character key is pressed; par2 contains the key code and par1 contains the current highlighted row;
- **QTABLE_VKEY** – a key is pressed; par2 contains the key code and par1 contains the current highlighted row;
- **QTABLE_MBUTTONDOWN** – the middle mouse button is clicked; par1 contains the row number, and par2 contains the column number;
- **QTABLE_MBUTTONDBLCLK** – the middle mouse button is double-clicked, par1 contains the row number, and par2 contains the column number;
- **QTABLE_LBUTTONUP** – the left mouse button is released, par1 contains the row number, and par2 contains the column number;
- **QTABLE_RBUTTONUP** – the right mouse button is released, par1 contains the row number, and par2 contains the column number;
- **QTABLE_CLOSE** – the table is closed; par1 and par2 are equal to 0.

3.15.17 RGB

This function transforms RGB components (red, green, blue) into a single number for further use in the SetColor function (see [3.15.18](#)).

Function call syntax:

```
NUMBER RGB(NUMBER red, NUMBER green, NUMBER blue)
```

3.15.18 SetColor

This function sets the colour for a cell, column or row in the table with the id 't_id'.

Function call syntax:

BOOLEAN SetColor(NUMBER t_id, NUMBER row, NUMBER col, NUMBER b_color, NUMBER f_color, NUMBER sel_b_color, NUMBER sel_f_color)

Parameters returned by this function:

- **b_color** – background colour;
- **f_color** – text colour;
- **sel_b_color** – background colour of the selected cell;
- **sel_f_color** – text colour of the selected cell.

Depending on the **row** and **col** parameters, you can change colour of the entire table or of a specific column, row or cell.

If the colour parameter is set to `QTABLE_DEFAULT_COLOR`, the colour specified in the Windows colour scheme is used. The function uses the `QTABLE_NO_INDEX` constant equal to '-1'.

Colour setting options for tables are as follows:

row	col	Result
Number of lines from 1 to N	Number of columns from 1 to M	A cell is highlighted with the specified colour
Number of lines from 1 to N	<code>QTABLE_NO_INDEX</code>	A row is highlighted with the specified colour
<code>QTABLE_NO_INDEX</code>	Number of columns from 1 to M	A column is highlighted with the specified colour
<code>QTABLE_NO_INDEX</code>	<code>QTABLE_NO_INDEX</code>	The entire table is highlighted with the specified colour

3.15.19 Highlight

This function highlights a selected cell range in the table 't_id' with the background and text colour for a specified period; then, highlighting gradually fades out. Function call syntax:

BOOLEAN Highlight(NUMBER t_id, NUMBER row, NUMBER col, NUMBER b_color, NUMBER f_color, NUMBER timeout)

Parameters:

- **b_color** – background colour;
- **f_color** – text colour;
- **timeout** – highlighting time in milliseconds.

To cancel highlighting, call this function with the timeout of 0. In this case, the parameters 'b_color' and 'f_color' can have any values.

Options for highlighting cells in a table are the same as the colour parameters used in the SetColor function (see [3.15.18](#)).

3.15.20 SetSelectedRow

Function selects a certain row of table.

```
NUMBER row SetSelectedRow((NUMBER table_id, NUMBER row)
```

Parameters:

- **table_id** – table identifier;
- **row** – row number.

If the set value is row=-1 the last visible row of table is selected.

If executed successfully the function returns number of the selected row, otherwise "-1".

The function works with visible presentation of table considering user filters and sorting.

3.16 Function for Working with Labels

Functions are intended to form labels and its setting up on graph.

3.16.1 AddLabel

Function adds a label with specified parameters.

```
NUMBER AddLabel(String chart_tag, TABLE label_params)
```

Parameters:

- **chart_tag** – tag of the graph to which the label is bound (for more details see 4.2.4 of Section 4 of User's manual for QUIK, setting Magic);
- **label_params** – table with label parameters.

The function returns the numerical identifier of label. If executed unsuccessfully, the function returns "nil". Format of table with label parameters:

No.	Parameter	Type	Description
1	TEXT	STRING	Label signature (if not required, this is an empty string)

No.	Parameter	Type	Description
2	IMAGE_PATH	STRING	Path to the image displayed as a label (if the image is not required, this is an empty string). Use images in format *.bmp or *.jpeg
3	ALIGNMENT	STRING	Text position relative to the image (four variants are possible: LEFT, RIGHT, TOP, BOTTOM)
4	YVALUE	NUMBER	Y-axis value of the parameter to which the label is bound
5	DATE	NUMBER	YYYYMMDD date format to which the label is bound
6	TIME	NUMBER	HHMMSS time format to which the label is bound
7	R	NUMBER	Red color component in RGB format, which is a number within an interval [0;255]
8	G	NUMBER	Green color component in RGB format, which is a number within an interval [0;255]
9	B	NUMBER	Blue color component in RGB format, which is a number within an interval [0;255]
10	TRANSPARENCY	NUMBER	Label transparency as a percentage. The value should fall within a range [0; 100]
11	TRANSPARENT_BACKGROUND	NUMBER	Transparency of image background. Valid values 0 for transparency disabled or 1 for transparency enabled
12	FONT_FACE_NAME	STRING	Font name (e.g., Arial)
13	FONT_HEIGHT	NUMBER	Font size
14	HINT	STRING	Popup hint

3.16.2 DelLabel

Function deletes a label with specified parameters.

```
BOOLEAN DelLabel(STRING chart_tag, NUMBER label_id)
```

Parameters:

- **chart_tag** – tag of the graph to which the label is bound;
- **label_id** – label identifier.

If executed successfully the function returns “true”, otherwise “false”.

3.16.3 DelAllLabels

Function deletes all labels on chart with the specified graph.

BOOLEAN DelAllLabels(String chart_tag)

Parameters:

- **chart_tag** – tag of the graph to which the label is bound.

If executed successfully the function returns “true”, otherwise “false”.

3.16.4 GetLabelParams

Function allows getting label parameters

TABLE GetLabelParams(String chart_tag, NUMBER label_id)

Parameters:

- **chart_tag** – tag of the graph to which the label is bound;
- **label_id** – label identifier.

Functions returns the table with label parameters. If executed unsuccessfully, the function returns “nil”.

Names of parameter labels in the returned table are specified in lowercase, all values are of STRING type.

3.16.5 SetLabelParams

Function sets parameters for label with specified identifier.

BOOLEAN SetLabelParams(String chart_tag, NUMBER label_id, TABLE label_params)

Parameters:

- **chart_tag** – tag of the graph to which the label is bound;
- **label_id** – label identifier;
- **label_params** – table with parameters of new label.

If executed successfully the function returns “true”, otherwise “false”.

3.17 Functions for Ordering Level II Quotes Table

3.17.1 Subscribe_Level_II_Quotes

This function orders receiving the Level II Quotes table from the server for a specified class and security.

BOOLEAN Subscribe_Level_II_Quotes(String class_code, String sec_code)

Parameters:

- **class_code** – class code;
- **sec_code** – security code.

If executed successfully the function returns “true”.

3.17.2 Unsubscribe_Level_II_Quotes

This function cancels the order for receiving the Level II Quotes table from the server for a specified class and security.

```
BOOLEAN Unsubscribe_Level_II_Quotes(STRING class_code, STRING sec_code)
```

Parameters:

- **class_code** – class code;
- **sec_code** – security code.

If executed successfully the function returns “true”.

3.17.3 IsSubscribed_Level_II_Quotes

This function allows to know whether the Level II Quotes table for a specified class and security is ordered from the server.

```
BOOLEAN IsSubscribed_Level_II_Quotes (STRING class_code, STRING sec_code)
```

Parameters:

- **class_code** – class code;
- **sec_code** – security code.

This function returns ‘true’ if the Level II Quotes table for **class_code** class and **sec_code** security has already been ordered.

3.18 Functions for Ordering Quotes Table Parameters

3.18.1 ParamRequest

This function orders receiving the Quotes table parameters.

```
BOOLEAN ParamRequest(STRING class_code, STRING sec_code, STRING db_name)
```

For correct work of the function, enable the attribute ‘According to settings of tables opened by the user’ in settings of QUIK Workstation (menu System / Settings / General settings..., section Program / Receiving data).

Parameters:

- **class_code** – class code;
- **sec_code** – security code;
- **db_name** – parameter code.

If executed successfully the function returns “true”, otherwise “false”.

3.18.2 CancelParamRequest

This function cancels a request for receiving the Quotes table parameters.

```
BOOLEAN CancelParamRequest(String class_code, String sec_code, String db_name)
```

For correct work of the function, enable the attribute 'According to settings of tables opened by the user' in settings of QUIK Workstation (menu System / Settings / General settings..., section Program / Receiving data).

Parameters:

- **class_code** – class code;
- **sec_code** – security code;
- **db_name** – parameter code.

If executed successfully the function returns “true”, otherwise “false”.

**When using the ParamRequest() and CancelParamRequest() functions, it is possible to refuse from the requested parameters of the Quotes table if there is getParamEx2() function in the script.
If getParamEx() function is used, then CancelParamRequest() function will not refuse from receiving parameters of the Quotes table.**

4. Data Structures

4.1 Classes

Class table parameters

Parameter	Type	Description
firmid	STRING	Firm ID
name	STRING	Class name

Parameter	Type	Description
class_code	STRING	Class code
npars	NUMBER	Number of parameters in the class
nsecs	NUMBER	Number of securities in the class

Example:

```
t={
  ["firmid"]="NC0038900000",
  ["name"]="Broker quotes",
  ["code"]="BQUOTE",
  ["npars"]=38,
  ["nsecs"]=28
}
```

See also the descriptions of [getItem](#) and [getNumberOf](#).

4.2 Firms

Firm table parameters

Parameter	Type	Description
firmid	STRING	Firm ID
firm_name	STRING	Firm name
status	NUMBER	Status
exchange	STRING	Trading venue

See also the descriptions of [getItem](#) and [getNumberOf](#).

4.3 Anonymous Trades

Anonymous trades table parameters

Parameter	Type	Description
trade_num	NUMBER	Trade identifier

Parameter	Type	Description
flags	NUMBER	Flags for Anonymous Trades Table
price	NUMBER	Price
qty	NUMBER	Volume
value	NUMBER	Trade volume
accruedint	NUMBER	Accrued interest
yield	NUMBER	Yield
settlecode	STRING	Settlement code
reporate	NUMBER	REPO rate
repovalue	NUMBER	REPO sum
repo2value	NUMBER	REPO buyback volume
repoterm	NUMBER	REPO period in days
sec_code	STRING	Security code
class_code	STRING	Class code
datetime	TABLE	Date and Time Format Used in Tables
period	NUMBER	Period of trading session. Valid values: <ul style="list-style-type: none"> _ 0 – opening; _ 1 – normal; _ 2 – closing
open_interest	NUMBER	Open interest
exchange_code	STRING	Exchange code in trading system

4.4 Trades

Trades table parameters

Parameter	Type	Description
trade_num	NUMBER	Trade number in the trading system
order_num	NUMBER	Order number in the trading system
brokerref	STRING	Comment, usually: <client code>/<order number>

Parameter	Type	Description
userid	STRING	Trader identifier
firmid	STRING	Dealer identifier
canceled_uid	NUMBER	ID of the user who has refused from trade
account	STRING	Trading account
price	NUMBER	Price
qty	NUMBER	Number of instruments in the last trade, lots
value	NUMBER	Volume in cash
accruedint	NUMBER	Accrued interest
yield	NUMBER	Yield
settlecode	STRING	Settlement code
cpfirmid	STRING	Partner's firm code
flags	NUMBER	Flags for the Orders, Negdeal Orders, Trades, and Trades for Execution Tables
price2	NUMBER	Buyback price
reporate	NUMBER	REPO rate (%)
client_code	STRING	Client code
accrued2	NUMBER	Profit (%) of the buyback date
repoterm	NUMBER	REPO term, in calendar days
repovalue	NUMBER	REPO sum
repo2value	NUMBER	REPO buyback value
start_discount	NUMBER	Start discount (%)
lower_discount	NUMBER	Lower discount (%)
upper_discount	NUMBER	Upper discount (%)
block_securities	NUMBER	Indicates if collateral is locked (Yes/No)
clearing_comission	NUMBER	Clearing commission of the exchange
exchange_comission	NUMBER	Exchange commission
tech_center_comission	NUMBER	Technical centre commission

Parameter	Type	Description
settle_date	NUMBER	Settlement date
settle_currency	STRING	Settle currency
trade_currency	STRING	Currency
exchange_code	STRING	Exchange code in the trading system
station_id	STRING	Workstation identifier
sec_code	STRING	Code of the instrument in an order
class_code	STRING	Class code
datetime	TABLE	Date and Time Format Used in Tables
bank_acc_id	STRING	Settlement account id/clearing organization code
broker_comission	NUMBER	Brokerage commission, accurate to 2 digits. This field is reserved for use in the future
linked_trade	NUMBER	Number of showcase trade in the trading system for REPO trades with CCP and SWAP
period	NUMBER	Period of trading session. Valid values: _ 0 – opening; _ 1 – normal; _ 2 – closing
trans_id	NUMBER	Identifier of transaction
kind	NUMBER	Trade type. Valid values: _ 1 – Common; _ 2 – Negotiated; _ 3 – Initial placement; _ 4 – Transter of cash/securities; _ 5 – Negotiated trade with first REPO part; _ 6 – Settlement trade with SWAP operation; _ 7 – Settlement trade with OTC SWAP operation; _ 8 – Settlement trade with dual currency busket; _ 9 – Settlement OTC trade with dual currency busket; _ 10 – REPO with CCP tarde; _ 11 – First part of REPO with CCP tarde; _ 12 – Second part of REPO with CCP tarde; _ 13 – Negotiated REPO with CCP tarde; _ 14 – First part of negotiated REPO with CCP tarde; _ 15 – Second part of negotiated REPO with CCP tarde; _ 16 – Technical trade to return assets REPO with CCP; _ 17 – Trade with a spread between futures of different terms with the same asset; _ 18 – Technical trade of the first part of spread between futures; _ 19 – Technical trade of the second part of spread between

Parameter	Type	Description
		futures; – 20 – Negotiated trade with the first part of REPO basket; – 21 Negotiated trade with the second part of REPO basket; – 22 – rollover positions of derivatives market
clearing_bank_accid	STRING	Account identifier in NCC (settlement code)
canceled_datetime	TABLE	Date and time of order cancellation
clearing_firmid	STRING	Identifier of firm – clearing participant
system_ref	STRING	Additional information on trade transmitted by the trading system
uid	NUMBER	Identifier of user on QUIK Server

4.5 Orders

Orders table parameters

Parameter	Type	Description
order_num	NUMBER	Order number in the trading system
* flags	NUMBER	Flags for the Orders, Negdeal Orders, Trades, and Trades for Execution Tables
brokerref	STRING	Comment, usually: <client code>/<order number>
userid	STRING	Trader identifier
firmid	STRING	Firm ID
account	STRING	Trading account
price	NUMBER	Price
qty	NUMBER	Quantity in lots
balance	NUMBER	Balance
value	NUMBER	Volume in cash
accruedint	NUMBER	Accrued interest
yield	NUMBER	Yield
trans_id	NUMBER	Transaction identifier

Parameter	Type	Description
client_code	STRING	Client code
price2	NUMBER	Buyback price
settlecode	STRING	Settlement code
uid	NUMBER	User identifier
exchange_code	STRING	Exchange code in the trading system
canceled_uid	NUMBER	ID of the user who withdrew the order
activation_time	NUMBER	Time of activation
linkedorder	NUMBER	Order number in the trading system
expiry	NUMBER	Order expiry date
sec_code	STRING	Code of the instrument in an order
class_code	STRING	Order class code
datetime	TABLE	Date and Time Format Used in Tables
withdraw_datetime	TABLE	Date and Time Format Used in Tables of order cancellation
bank_acc_id	STRING	Settlement account id/clearing organization code
value_entry_type	NUMBER	Methods of specifying an order volume Valid values: _ 0 – by quantity; _ 1 – by volume
repoterm	NUMBER	REPO period in calendar days
repovalue	NUMBER	REPO amount as of the current date, accurate to 2 digits
repo2value	NUMBER	REPO buyback volume, accurate to 2 digits
repo_value_balance	NUMBER	REPO amount excluding the sum of cash raised or borrowed REPO funds in the unfilled amount of the order as of the current date, accurate to 2 digits
start_discount	NUMBER	Start discount, %
reject_reason	STRING	The reason why the broker rejected the order
ext_order_flags	NUMBER	A bit field reserved for specific parameters from western venues.

Parameter	Type	Description
min_qty	NUMBER	The minimum acceptable quantity that can be specified in an order for this instrument. 0 means that the quantity limit is not set
exec_type	NUMBER	Order execution type. Valid values: <ul style="list-style-type: none"> _ 0 – not defined; _ 1 – Fill or Kill; _ 2 – Put in queue; _ 3 – Immediately or Cancel; _ 4 – Good till cancel; _ 5 – Good till date; _ 6 – Session; _ 7 – Open; _ 8 – Close; _ 9 – At the closing auction price; _ 11 – Till next session; _ 13 – While connected; _ 15 – Till time; _ 16 – Next scheduled intra-day auction
side_qualifier	NUMBER	A field reserved for the parameters of western trading venues 0 means that the value is not set
acnt_type	NUMBER	A field reserved for the parameters of western trading venues 0 means that the value is not set
capacity	NUMBER	A field reserved for the parameters of western trading venues 0 means that the value is not set
passive_only_order	NUMBER	A field reserved for the parameters of western trading venues If it has the value of 0, then the value is not set
visible	NUMBER	Visible quantity. Parameter of iceberg orders, 0 value is displayed for common orders

4.6 Current Positions for Client Accounts

Description of the Table of current positions for accounts:

Parameter	Type	Description
firmid	STRING	Firm ID
sec_code	STRING	Security code
trdaccid	STRING	Trading account
depaccid	STRING	Depo account
openbal	NUMBER	Opening position
currentpos	NUMBER	Current position

Parameter	Type	Description
plannedpossell	NUMBER	Planned selling
plannedposbuy	NUMBER	Planned buying
planbal	NUMBER	Check balance of a simple clearing, equals to the opening balance minus the volume of the planned sell position included in that simple clearing
usqtyb	NUMBER	Buy
usqtys	NUMBER	Sell
planned	NUMBER	Planned balance, equals to the current balance minus the volume of the planned sell position
settlebal	NUMBER	Planned position after settlements
bank_acc_id	STRING	Settlement account id/clearing organization code
firmuse	NUMBER	Indicates a collateral account. Valid values: <ul style="list-style-type: none"> _ '0' refers to normal accounts; _ '1' refers to a collateral account

4.7 Current Positions for Instruments

Description of the Table of current positions for instruments:

Parameter	Type	Description
firmid	STRING	Firm
seccode	STRING	Security code
openbal	NUMBER	Opening position
currentpos	NUMBER	Current position
plannedposbuy	NUMBER	Volume of active buy orders, in securities
plannedpossell	NUMBER	Volume of active sell orders, in securities
usqtyb	NUMBER	Buy
usqtys	NUMBER	Sell

4.8 Stop Orders

Description of the Stop orders table parameters:

Parameter	Type	Description
order_num	NUMBER	Registration number of a stop order on the QUIK server
ordertime	NUMBER	Creation time
flags	NUMBER	Flags for Anonymous Trades Table
brokerref	STRING	Comment, usually: <client code>/<order number>
firmid	STRING	Dealer identifier
account	STRING	Trading account
condition	NUMBER	Stop price direction Valid values: <ul style="list-style-type: none"> – 4 means '<='; – 5 means '>='
condition_price	NUMBER	Stop price
price	NUMBER	Price
qty	NUMBER	Quantity in lots
linkedorder	NUMBER	Order number in the trading system placed after a stop price is reached
expiry	NUMBER	Order expiry date
trans_id	NUMBER	Transaction identifier
client_code	STRING	Client code
co_order_num	NUMBER	Linked order
co_order_price	NUMBER	Linked order price
stop_order_type	NUMBER	Stop order type. Valid values: <ul style="list-style-type: none"> – 1 – stop limit; – 2 – condition by another instrument; – 3 – with a linked order; – 6 – take-profit; – 7 – 'if done' stop limit; – 8 – 'if done' take profit; – 9 – take-profit and stop limit
orderdate	NUMBER	Creation date
alltrade_num	NUMBER	Trade of the primary order
stopflags	NUMBER	Additional Flags for Stop Orders Table
offset	NUMBER	Offset from min/max

Parameter	Type	Description
spread	NUMBER	Protective spread
balance	NUMBER	Active amount
uid	NUMBER	User identifier
filled_qty	NUMBER	Filled quantity
withdraw_time	NUMBER	Order cancellation time
condition_price2	NUMBER	Stop limit price (for orders of the 'Take profit and stop limit' type)
active_from_time	NUMBER	Time when an order of the 'Take profit and stop limit' type becomes active
active_to_time	NUMBER	Time when an order of the 'Take profit and stop limit' type expires
sec_code	STRING	Code of the instrument in an order
class_code	STRING	Order class code
condition_sec_code	STRING	Stop price instrument code
condition_class_code	STRING	Stop price class code
canceled_uid	NUMBER	Identifier of user who cancelled a stop order
order_date_time	TABLE	Time of stop order submission
withdraw_datetime	TABLE	Time of stop order cancellation

4.9 Futures Limits

Description of a futures limit parameters:

Parameter	Type	Description
firmid	STRING	Firm ID
trdaccid	STRING	Trading account
limit_type	NUMBER	Type of limit. Valid values: <ul style="list-style-type: none"> – 0 – Cash; – 1 – Secured funds; – 2 – By combined assets; – 3 – Clearing cash; – 4 – Clearing collateral cash; – 5 – Limit for open positions on the spot market; – 6 – Total deposit funds in foreign currency (in roubles); – 7 – Deposit funds in foreign currency

Parameter	Type	Description
liquidity_coef	NUMBER	Liquidity coefficient
cbp_prev_limit	NUMBER	Previous limit for open positions
cbplimit	NUMBER	Limit for open positions
cbplused	NUMBER	Current net positions
cbplplanned	NUMBER	Planned net positions
varmargin	NUMBER	Variation margin
accruedint	NUMBER	Accrued interest
cbplused_for_orders	NUMBER	Current net positions (for orders)
cbplused_for_positions	NUMBER	Current net positions (for open orders)
options_premium	NUMBER	Options premium
ts_comission	NUMBER	Exchange commission
kgo	NUMBER	Client collateral coefficient
currcode	STRING	Currency in which a limit is transmitted
real_varmargin	NUMBER	Actual variation margin calculated during clearing, accurate to 2 digits. The 'varmargin' transmits a variation margin calculated taking into account the set price alteration limits

4.10 Client Account Positions (Futures)

Description of the Table of positions for futures:

Parameter	Type	Description
firmid	STRING	Firm ID
trdaccid	STRING	Trading account
sec_code	STRING	Futures contract code
type	NUMBER	Type of limit Valid values: _ 0 – not defined; _ 1 – main account; _ 2 – client and additional accounts; _ 4 – Accounts of all traders
startbuy	NUMBER	Opening long positions
startsell	NUMBER	Opening short positions

Parameter	Type	Description
startnet	NUMBER	Opening net positions
todaybuy	NUMBER	Current long positions
todaysell	NUMBER	Current short positions
totalnet	NUMBER	Current net positions
openbuys	NUMBER	Open for buying
opensells	NUMBER	Open for selling
cbplused	NUMBER	Estimated current net positions
cbplplanned	NUMBER	Planned net positions
varmargin	NUMBER	Variation margin
avrposnprice	NUMBER	Effective price of positions
positionvalue	NUMBER	Position value
real_varmargin	NUMBER	Actual variation margin calculated during clearing, accurate to 2 digits. The existing 'varmargin' field contains a variation margin calculated with regard to the specified price variation limits
total_varmargin	NUMBER	Total variation margin after main clearing calculated for all positions, accurate to 2 digits
session_status	NUMBER	Actual status of trading session. Valid values: <ul style="list-style-type: none"> – 0 – not defined; – 1 – main / evening session; – 2 – intermediate clearing started; – 3 – intermediate clearing finished; – 4 – main clearing started; – 5 – main clearing, new session is fixed; – 6 – main clearing finished; – 7 – evening session finished

4.11 Cash Limits

Cash limits table parameters:

Parameter	Type	Description
currcode	STRING	Currency code
tag	STRING	Settlement tag
firmid	STRING	Firm ID

Parameter	Type	Description
client_code	STRING	Client code
openbal	NUMBER	Opening cash balance
openlimit	NUMBER	Opening cash limit
currentbal	NUMBER	Current cash balance
currentlimit	NUMBER	Current cash limit
locked	NUMBER	Locked quantity
locked_value_coef	NUMBER	Value of the buy orders for non-marginal securities
locked_margin_value	NUMBER	Value of the buy orders for marginal securities
leverage	NUMBER	Leverage
limit_kind	NUMBER	Type of limit. Valid values: <ul style="list-style-type: none"> – positive integers, starting from 0, corresponding to limit kinds from the Cash limits table: 0 – T0; 1 – T1; 2 – T2, etc.; – negative integers – technological limits (used for internal operation of the QUIK system)

4.12 Removing Cash Limit

Description of the Cash limit removal table

Parameter	Type	Description
currcode	STRING	Currency code
tag	STRING	Settlement tag
client_code	STRING	Client code
firmid	STRING	Firm ID
limit_kind	NUMBER	Type of limit Valid values: <ul style="list-style-type: none"> – positive integers, starting from 0, corresponding to limit kinds from the Cash limits table: 0 – T0; 1 – T1; 2 – T2, etc.; – negative integers – technological limits (used for internal operation of the QUIK system)

4.13 Deleting Security Limit

Description of the Deleting security limit table

Parameter	Type	Description
sec_code	STRING	Security code
trdaccid	STRING	Trading account code
firmid	STRING	Firm ID
client_code	STRING	Client code
limit_kind	NUMBER	Type of limit Valid values: <ul style="list-style-type: none"> – positive integers, starting from 0, corresponding to limit kinds from the Llimits for securities table: 0 – T0; 1 – T1; 2 – T2, etc.; – negative integers – technological limits (used for internal operation of the QUIK system)

4.14 Deleting Futures Limit

Description of the Deleting futures limit table:

Parameter	Type	Description
firmid	STRING	Firm ID
limit_type	NUMBER	Type of limit. Valid values: <ul style="list-style-type: none"> – 0 – Cash; – 1 – Secured funds; – 2 – By combined assets; – 3 – Clearing cash; – 4 – Clearing collateral cash; – 5 – Limit for open positions on the spot market; – 6 – Total deposit funds in foreign currency (in roubles); – 7 – Deposit funds in foreign currency

4.15 Limits for Securities

Description of the Limits for securities table

Parameter	Type	Description
sec_code	STRING	Security code
trdaccid	STRING	Depo account
firmid	STRING	Firm ID
client_code	STRING	Client code
openbal	NUMBER	Opening balance for securities

Parameter	Type	Description
openlimit	NUMBER	Open limit for securities
currentbal	NUMBER	Current securities balance
currentlimit	NUMBER	Current limit for securities
locked_sell	NUMBER	Locked for selling a number of lots
locked_buy	NUMBER	Locked for buying a number of lots
locked_buy_value	NUMBER	Value of instruments locked for buying
locked_sell_value	NUMBER	Value of instruments locked for selling
awg_position_price	NUMBER	WA.position price
limit_kind	NUMBER	Type of limit Valid values: <ul style="list-style-type: none"> – positive integers, starting from 0, corresponding to limit kinds from the Llimits for securities table: 0 – T0; 1 – T1; 2 – T2, etc.; – negative integers – technological limits (used for internal operation of the QUIK system)

4.16 Cash Positions

Description of the Cash positions table:

Parameter	Type	Description
firmid	STRING	Firm ID
currcode	STRING	Currency code
tag	STRING	Settlement tag
description	STRING	Description
openbal	NUMBER	Opening position
currentpos	NUMBER	Current position
plannedpos	NUMBER	Planned balance
limit1	NUMBER	External cash limit
limit2	NUMBER	Internal cash limit
orderbuy	NUMBER	In sell orders
ordersell	NUMBER	In buy orders

Parameter	Type	Description
netto	NUMBER	Netto position
plannedbal	NUMBER	Planned position
debit	NUMBER	Debit
credit	NUMBER	BankAccID
bank_acc_id	STRING	Account ID
margincall	NUMBER	Marginal requirement at the beginning of trading
settlebal	NUMBER	Planned position after settlements

4.17 Negotiated Deal Orders

Description of the Negotiated deal orders table:

Parameter	Type	Description
neg_deal_num	NUMBER	Number
neg_deal_time	NUMBER	Time when an order was placed
flags	NUMBER	Flags for the Orders, Negdeal Orders, Trades, and Trades for Execution Tables
brokerref	STRING	Comment, usually: <client code>/<order number>
userid	STRING	Trader
firmid	STRING	Dealer identifier
cpuserid	STRING	Partner's trader
cpfirmid	STRING	Partner's firm code
account	STRING	Account
price	NUMBER	Price
qty	NUMBER	Volume
matchref	STRING	Reference
settlecode	STRING	Settlement code
yield	NUMBER	Yield
accruedint	NUMBER	Coupon rate (%)

Parameter	Type	Description
value	NUMBER	Volume
price2	NUMBER	Buyback price
reporate	NUMBER	REPO rate (%)
refundrate	NUMBER	Refund rate (%)
trans_id	NUMBER	Trans ID
client_code	STRING	Client code
repoentry	NUMBER	REPO order entry type Valid values: _ 0 – not defined; _ 1 – Price1+Rate; _ 2 – Rate+Price2; _ 3 – Price1+Price2; _ 4 – REPO sum+ Volume; _ 5 – REPO sum+Discount; _ 6 – Volume +Discount; _ 7 – REPO sum; _ 8 – Volume
repovalue	NUMBER	REPO sum
repo2value	NUMBER	REPO buyback value
repoterm	NUMBER	REPO period
start_discount	NUMBER	Start discount (%)
lower_discount	NUMBER	Lower discount (%)
upper_discount	NUMBER	Upper discount (%)
block_securities	NUMBER	Indicates if collateral is locked (Yes/No)
uid	NUMBER	User identifier
withdraw_time	NUMBER	Order cancellation time
neg_deal_date	NUMBER	Order placement date
balance	NUMBER	Balance
origin_repoval	NUMBER	Original REPO sum
origin_qty	NUMBER	Original quantity
origin_discount	NUMBER	Original discount percent
neg_deal_activation_date	NUMBER	Order activation date
neg_deal_activation_time	NUMBER	Order activation time

Parameter	Type	Description
quoteno	NUMBER	Non-negotiated counter-order
settle_currency	STRING	Settlement currency
sec_code	STRING	Security code
class_code	STRING	Class code
bank_acc_id	STRING	Settlement account id/clearing organization code
withdraw_date	NUMBER	Data when an negotiated order was cancelled, in the format YYYYMMDD
linkedorder	NUMBER	Number of the previous order Displayed with '0' accuracy
activation_date_time	TABLE	Date and time of order activation
withdraw_date_time	TABLE	Date and time of order cancellation
date_time	TABLE	Date and time of order

4.18 Trades for Execution

Description of the Trades for execution table

Parameter	Type	Description
trade_num	NUMBER	Trade number
trade_date	NUMBER	Trading date
settle_date	NUMBER	Settlement date
flags	NUMBER	Flags for the Orders, Negdeal Orders, Trades, and Trades for Execution Tables
brokerref	STRING	Comment, usually: <client code>/<order number>
firmid	STRING	Dealer identifier
account	STRING	Depo account
cpfirmid	STRING	Partner's firm code
cpaccount	STRING	Partner's DEPO account
price	NUMBER	Price
qty	NUMBER	Volume
value	NUMBER	Volume

Parameter	Type	Description
settlecode	STRING	Settlement code
report_num	NUMBER	Report
cpreport_num	NUMBER	Partner's report
accruedint	NUMBER	Coupon rate (%)
repotradeno	NUMBER	Trade number of the first leg of REPO
price1	NUMBER	Prices of the first leg of REPO
reporate	NUMBER	REPO rate (%)
price2	NUMBER	Buyback price
client_code	STRING	Client code
ts_comission	NUMBER	Trading system's commission
balance	NUMBER	Balance
settle_time	NUMBER	Execution time
amount	NUMBER	Amount of liability
repovalue	NUMBER	REPO sum
repoterm	NUMBER	REPO period
repo2value	NUMBER	REPO buyback value
return_value	NUMBER	REPO return value
discount	NUMBER	Discount (%)
lower_discount	NUMBER	Lower discount (%)
upper_discount	NUMBER	Upper discount (%)
block_securities	NUMBER	Indicates if collateral is locked (Yes/No)
urgency_flag	NUMBER	Execute (Yes/No)
type	NUMBER	Type. Valid values: <ul style="list-style-type: none"> _ 0 – negotiated deal; _ 1 – first leg of REPO; _ 2 – second leg of REPO; _ 3 – compensation payment; _ 4 – defaulter: deferred commitments and claims; _ 5 – aggrieved person: deferred commitments and claims
operation_type	NUMBER	Direction Valid values: <ul style="list-style-type: none"> _ 1 – 'Credit'; _ 2 – 'Write off'

Parameter	Type	Description
expected_discount	NUMBER	Discount after payment (%)
expected_quantity	NUMBER	Quantity after payment
expected_repovalue	NUMBER	REPO sum after payment
expected_repo2value	NUMBER	REPO buyback value after payment
expected_return_value	NUMBER	REPO return sum after payment
order_num	NUMBER	Order number
report_trade_date	NUMBER	Date of settlement
settled	NUMBER	Trade settlement status Valid values: _ 1 – Processed; _ 2 – Not processed; _ 3 – In processing
clearing_type	NUMBER	Type of clearing. Valid values: _ 1 – 'Not set'; _ 2 – 'Simple'; _ 3 – 'Multilateral'
report_comission	NUMBER	Report comission
coupon_payment	NUMBER	Coupon payment
principal_payment	NUMBER	Principal debt payment
principal_payment_date	NUMBER	Date of principal debt payment
nextdaysettle	NUMBER	Date of the next settlement day
settle_currency	STRING	Settle currency
sec_code	STRING	Security code
class_code	STRING	Class code
compval	NUMBER	Amount of compensation in currency of the trade
parenttradenno	NUMBER	Parent trade ID
bankid	STRING	Settlement organization ID
bankaccid	STRING	Position code
precisebalance	NUMBER	Number of securities for execution (in lots)
confirmtime	NUMBER	Time of confirmation in format HHMMSS
ex_flags	NUMBER	Extended flags of a trade for execution. Valid values: _ 1 – Confirmed by counterparty; _ 2 – Confirmed

Parameter	Type	Description
confirmreport	NUMBER	Number of instruction

4.19 Trading accounts

Description of the Trading accounts table:

Parameter	Type	Description
class_codes	STRING	List of class codes separated by the ' ' character
firmid	STRING	Firm ID
trdaccid	STRING	Trading account code
description	STRING	Description
fullcoveredsell	NUMBER	Prohibition for uncovered sell. Valid values: _ 0 – No; _ 1 – Yes
main_trdaccid	NUMBER	Number of main trading account
bankid_t0	STRING	Settlement organization by T0
bankid_tplus	STRING	Settlement organization by T0
trdacc_type	NUMBER	Type of depo account
depunitid	STRING	Section of depo account
status	NUMBER	Status of trading account. Valid values: _ 0 – operations allowed; _ 1 – operations prohibited
firmuse	NUMER	Section type. Valid values: _ 0 – collateral section; _ otherwise – for trading sections
depaccid	STRING	Number of depo account in depository
bank_acc_id	STRING	Code of additional cash position

4.20 Reports on Trades for Execution

Description of the Reports on trades for execution table:

Parameter	Type	Description
-----------	------	-------------

Parameter	Type	Description
report_num	NUMBER	Report
report_date	NUMBER	Report date
flags	NUMBER	Flags for the Orders , Negdeal Orders, Trades, and Trades for Execution Tables
userid	STRING	User identifier
firmid	STRING	Firm ID
account	STRING	Depo account
cpfirmid	STRING	Partner's firm code
cpaccount	STRING	Partner's trading account code
qty	NUMBER	Quantity of securities, lots
value	NUMBER	Trade volume, in roubles
withdraw_time	NUMBER	Order cancellation time
report_type	NUMBER	Report type
report_kind	NUMBER	Report kind
commission	NUMBER	Trade commission, in roubles
sec_code	STRING	Security code
class_code	STRING	Class code
report_time	NUMBER	Report time
report_date_time	TABLE	Report date and time

4.21 Instruments

Description of the Instruments table:

Parameter	Type	Description
code	STRING	Security code
name	STRING	Instrument name
short_name	STRING	Short name for an instrument
class_code	STRING	Instrument class code

Parameter	Type	Description
class_name	STRING	Instrument class name
face_value	NUMBER	Face-value
face_unit	STRING	Face-value currency
scale	NUMBER	Precision (a number of significant digits after a decimal point)
mat_date	NUMBER	Expiration date
lot_size	NUMBER	Lot size
isin_code	STRING	ISIN
min_price_step	NUMBER	Minimum price step

4.22 Chart Candlesticks

Parameters of a chart candlestick:

Parameter	Type	Description
open	NUMBER	Opening price
close	NUMBER	Closing price
high	NUMBER	Highest tolerable price
low	NUMBER	Lowest tolerable price
volume	NUMBER	Last trade volume
datetime	TABLE	Date and time
doesExist	NUMBER	Specifies whether an indicator is calculated if there is a candlestick. Valid values: <ul style="list-style-type: none"> _ 0 – indicator is not calculated; _ 1 – indicator is calculated

4.23 Date and Time Format Used in Tables

The description of date and time format used in some tables:

Parameter	Type	Description
mcs	NUMBER	Microseconds
ms	NUMBER	Milliseconds

Parameter	Type	Description
sec	NUMBER	Seconds
min	NUMBER	Minutes
hour	NUMBER	Hours
day	NUMBER	Day
week_day	NUMBER	Weekday number
month	NUMBER	Month
year	NUMBER	Year

These parameters must be set for correct display of date and time

4.24 Transactions

Transactions parameters description.

Parameter	Type	Description
trans_id	NUMBER	Transaction's user ID
status	NUMBER	<p>Status of transaction. Valid values:</p> <ul style="list-style-type: none"> – 0 – transaction sent to server; – 1 – transaction is received on QUIK server from client; – 2 – error occurred when transferring transaction to the trading system. The transaction is not resent because connection to gateway of MOEX is broken; – 3 – transaction executed; – 4 – transaction is not executed by the trading system. Detailed description of the error is given in 'Message text' field; – 5 – transaction failed the control of QUIK server for certain criterias. For example, the control over user rights for sending transactions of this type; – 6 – transaction failed limits control of QUIK server; – 10 – transaction is not supported by the trading system; – 11 – transaction failed validation control of the digital signature; – 12 – no answer to transaction because the waiting timeout is expired. That may happen when submitting transaction from QPILE; – 13 – transaction is rejected as its execution could result a cross trade (a trade with the same client code); – 14 – transaction failed additional restrictions check; – 15 – transaction is accepted after the violation of additional restrictions; – 16 – transaction is canceled by user during the additional restrictions check

Parameter	Type	Description
result_msg	STRING	Message text
date_time	TABLE	Date and Time Format Used in Tables
uid	NUMBER	Identifier
flags	NUMBER	Transaction's flags (not used)
server_trans_id	NUMBER	Transaction ID on the server
*order_num	NUMBER	Order number
*price	NUMBER	Price
*quantity	NUMBER	Volume
*balance	NUMBER	Balance
*firm_id	STRING	Firm ID
*account	STRING	Trading account
*client_code	STRING	Client code
*brokerref	STRING	Comment
*class_code	STRING	Class code
*sec_code	STRING	Security code

* – the value of this parameter can be **nil**.

4.25 Asset Commitments and Claims

Description of the Asset commitments and claims table:

Parameter	Type	Description
firmid	STRING	Firm ID
depo_account	STRING	Number of the depo account in the Depository (NDC)
account	STRING	Trading account
bank_acc_id	STRING	Settlement account id/clearing organization code
settle_date	NUMBER	Settlement date
qty	NUMBER	Quantity of securities in trades

Parameter	Type	Description
qty_buy	NUMBER	Quantity of security in buy orders
qty_sell	NUMBER	Quantity of security in sell orders
netto	NUMBER	Netto position
debit	NUMBER	Debit
credit	NUMBER	Credit
sec_code	STRING	Code of the instrument in an order
class_code	STRING	Order class code
planned_covered	NUMBER	Planned T+ position
firm_use	NUMBER	Section type. Valid values: _ 0 – trading section; _ 1 – collateral section

4.26 Currency: commitments and demands on assets

Description of the Currency: commitments and demand on assets table:

Parameter	Type	Description
sec_code	STRING	Security code
class_code	STRING	Class code
firmId	STRING	Firm ID
account	STRING	Trading account
bank_acc_id	STRING	Identifier of settlement account in National Clearing Center
date	NUMBER	Settlement date
debit	NUMBER	Commitment value
credit	NUMBER	Claim value
value_buy	NUMBER	Funds amount in buy orders
value_sell	NUMBER	Funds amount in sell orders
margin_call	NUMBER	Refundable amount of the compensation transfer
planned_covered	NUMBER	Planned T+ position

Parameter	Type	Description
debit_balance	NUMBER	Commitment amount at the beginning of the day, with accuracy of two decimal points
credit_balance	NUMBER	Claim amount at the beginning of the day, with accuracy of two decimal points

5. Description of Bit Flags

5.1 Flags for the Orders, Negdeal Orders, Trades, and Trades for Execution Tables

Flag is set	Value
bit 0 (0x1)	The order is active, otherwise it is inactive
bit 1 (0x2)	The order was cancelled. If this flag is not set and the value of the bit 0 equals 0, then this order is filled
bit 2 (0x4)	A sell order; otherwise it is a buy order. This flag determines a trade's direction (BUY/SELL) for trades and trades for execution
bit 3 (0x8)	A limit order; otherwise it is a market order
bit 4 (0x10)	Allow / forbid trades at different prices
bit 5 (0x20)	Fill the order immediately, or cancel it (FILL OR KILL)
bit 6 (0x40)	Market-maker's order For negotiated orders, this means that the order was sent to a counterparty
bit 7 (0x80)	For negotiated orders, this means that the order was received from a counterparty
bit 8 (0x100)	Kill remain
bit 9 (0x200)	An iceberg order

5.2 Flags for Anonymous Trades Table

Flag is set	Value
bit 0 (0x1)	Sell trade
bit 1 (0x2)	Buy trade

If the flags are not set, the order direction is not determined.

5.3 Flags for Stop Orders Table

Flag is set	Value
bit 0 (0x1)	Order is active, otherwise is inactive
bit 1 (0x2)	The order was cancelled. If this flag is not set and the value of the bit 0 equals 0, then this order is filled
bit 2 (0x4)	A sell order; otherwise it is a buy order
bit 3 (0x8)	A limit order
bit 5 (0x20)	A stop order awaiting activation
bit 6 (0x40)	A stop order from another server
bit 8 (0x100)	This flag is set for an 'if done' take-profit order in case when the original order is partially filled and the activation condition of the take-profit order for the filled amount is met
bit 9 (0x200)	A stop order is activated manually
bit 10 (0x400)	A stop order was executed, but rejected by the trading system
bit 11 (0x800)	A stop order was executed, but didn't pass the limit control
bit 12 (0x1000)	A stop order was killed, since the linked order was killed
bit 13 (0x2000)	A stop order is killed, since the linked order was filled
bit 15 (0x8000)	Calculation of minimum/maximum is in the process

5.4 Additional Flags for Stop Orders Table

Flag is set	Value
bit 0 (0x1)	Use balance of the primary order
bit 1 (0x2)	Kill the stop order if this order is filled partially
bit 2 (0x4)	Activate the stop-order if the linked order is filled partially
bit 3 (0x8)	The offset is specified as a percentage; otherwise, in price points
bit 4 (0x10)	Protective spread is specified as a percentage, otherwise in price points
bit 5 (0x20)	A stop order expires today
bit 6 (0x40)	A stop order's validity interval is set

Flag is set	Value
bit 7 (0x80)	A take profit order is executed at the marked price
bit 8 (0x100)	A stop order is executed at the marked price

6. Functions for Working with Bit Masks in Data Structures

6.1 bit.tohex

This function converts the first argument into a hexadecimal string. A number of characters in the string is defined by the optional second parameter.

Function call syntax:

```
STRING bit.tohex(NUMBER x [, NUMBER n])
```

6.2 bit.bnot

This function returns the result of the bitwise NOT operation performed on the **x** argument.

Function call syntax:

```
NUMBER bit.bnot(NUMBER x)
```

6.3 bit.band

This function returns the result of the bitwise AND operation performed on the arguments. There can be several arguments; the arguments **x1** and **x2** are required. Function call syntax:

```
NUMBER bit.band(NUMBER x1, NUMBER x2, ...)
```

6.4 bit.bor

This function returns the result of the bitwise OR operation performed on the arguments. There can be several arguments; the arguments **x1** and **x2** are required. Function call syntax:

```
NUMBER bit.bor(NUMBER x1, NUMBER x2,...)
```

6.5 bit.bxor

This function returns the result of the bitwise XOR operation (exclusive OR) performed on the arguments. There can be several arguments; the arguments **x1** and **x2** are required.

Function call syntax:

NUMBER bit.bxor(NUMBER x1, NUMBER x2,...)

6.6 bit.test

This function checks the bit specified in a value. Returns **true** if a bit is equal to 1, returns **false** if a bit is equal to 0.

Function call syntax:

BOOLEAN bit.test(NUMBER x, NUMBER n)

where:

- x – value;
- n – bit number. Bit numbering starts from 0.

7. Indicators of the Technical Analysis

7.1 General Information

Technical analysis indicators represent a separate class of scripts that meet certain conditions and are located in **LuaIndicators** folder in the terminal's directory. If the file doesn't exist in the directory create it manually. List of scripts is available in dialogue **Servoces / LUA scripts...**


When a new indicator is added to a chart the **qlua** plugin scans **LuaIndicators** folder and checks the files with lua and luac extention (compiled lua scripts) to meet the following requirements:

- Function Init is defined;
- Function OnCalculate is defined;
- Lua table named Settings that contains Name field.

Example of the minimum correct code for an indicator:

```
Settings={}
Settings.Name = "minimal"
function Init()
    return 1
end
function OnCalculate(index)
    return 1
end
```

List of the available indicators is transmitted in **qchart** module and further it is available in the standard dialogue of adding an indicator to a chart:

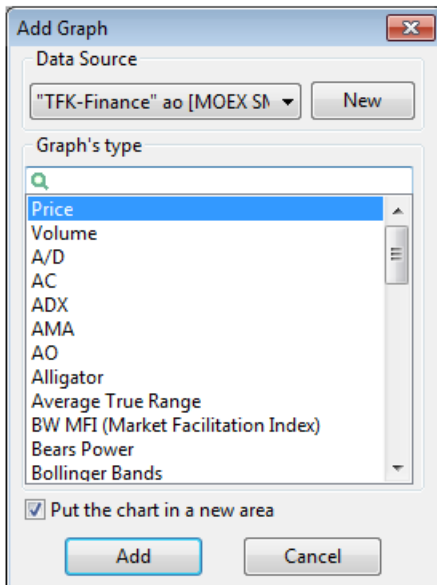

List of chart types is sorted in alphabetical order except of types Price and Volume that are always at the top of the list.

7.2 Functions and Global Variables of Script's Indicator

7.2.1 Init

The function is called when adding an indicator on a chart (when pressing the **Add** button on a chart window), returns the value defining the number of lines in indicator.

The function is called also when rerunning the QUIK Workstation and when loading a .wnd or .tab files that stores the graph with indicator.

Function call syntax:

```
NUMBER Init()
```

For example, for indicator Alligator the function returns the value 3.

7.2.2 OnCalculate

The function is called when appearing a new or changing an existent candlestick in the data source for an indicator. Function call syntax:

```
NUMBER v1 [, NUMBER vn] OnCalculate(NUMBER index)
```

Parameters:

- **index** – index of a candlestick in the data source. Start value is 1.

If the value v_i is not defined then the function returns nil as the value of a line in interval index.

For example:

```
function Init()
    myDEMA = cached_DTEMA()
    return 2
end
function OnCalculate(index)
    x, y = myDEMA(index, Settings.period, Settings.calc_mode) --exponential
    return x, y
end
```

7.2.3 OnDestroy

The function is called when removing an indicator from a chart or when closing the window of a chart. This function is not obligatory for an indicator. Function call syntax:

OnDestroy ()

7.2.4 Functions for Access to the Data Source

- Functions for access to the data source **O**, **H**, **L**, **C**, **V**, **T** take a candlestick index as the value of parameter and return an appropriate value in format:

NUMBER <name of function>(NUMBER index)

- Function **Size** returns a current number of candlesticks in the data source. Function call syntax:

NUMBER Size()

Description the the function's values **O**, **H**, **L**, **C**, **V**, **T**, **Size** is the same as given in [3.10.4](#).

Example of a script realizing Moving Average indicator:

```
Settings={}
Settings.Name = "SimpleMA"
Settings.mode = "C"
Settings.period = 5
Settings.str_field = "STRING field"

function dValue(i,param)
    local v = param or "C"
    if v == "O" then
        return O(i)
    elseif v == "H" then
```

```

        return H(i)
    elseif v == "L" then
        return L(i)
    elseif v == "C" then
        return C(i)
    elseif v == "V" then
        return V(i)
    elseif v == "M" then
        return (H(i) + L(i))/2
    elseif v == "T" then
        return (H(i) + L(i)+C(i))/3
    elseif v == "W" then
        return (H(i) + L(i)+2*C(i))/4
    else
        return C(i)
    end
end

function Init()
    return 1
end

function OnCalculate(idx)
    local per = Settings.period
    local mode = Settings.mode
    local lValue = iValue
    if idx >= per then
        local ma_value=0
        for j = (idx-per)+1, idx do
            ma_value = ma_value+dValue(j, mode)
        end
        return ma_value/per
    else
        return nil
    end
end
end

```

7.2.5 CandleExist

The function is designed to check for the existence of the candle on the price and volume chart:

BOOLEAN CandleExist(NUMBER index)

Parameters:

- **index** – candle index.

The function takes as a parameter the index of the candle and returns “true” if candle exists, otherwise “false”.

The function determines the candles that need not be taken into account in the calculation of the indicator. These candles appear if you add on one chart with the price and volume graph the graph of the parameter values from the Quotes Table or when the graph setting “Show empty intervals” is enabled. For such candles the O, H, L, C, V functions return "nil", and the T function returns empty candle's time.

An example of use of a function for Moving Average indicator at close price:

```
Settings= {
  Name = "Moving Average Lua",
  Period = 9,
  line =
  {
    {
      Name = "Moving Average Lua",
      Color = RGB(90, 110, 200),
      Type = TYPE_LINE,
      Width = 1
    }
  }
}

function Init()
  QUEUE = {}
  SUM = 0
  return 1
end

function OnCalculate(index)
  return Average(index)
end

function Average(indx)
  --if the indicator is recalculated, queue and sum are reset
  if indx == 1 then
    QUEUE = {}
    SUM = 0
  end
  --if the candle is not empty, add it to the queue and sum up the close value
  if CandleExist(indx) then
    table.insert(QUEUE, {C_value = C(indx)})
    SUM = SUM + QUEUE[#QUEUE].C_value
    --if the queue reaches the required period, the average value is calculated
```

```

    if #QUEUE == Settings.Period then
        local avg = SUM/Settings.Period
        SUM = SUM - QUEUE[1].C_value
        table.remove(QUEUE, 1)
        return avg
    end
else
    return nil
end
end
end

```

7.2.6 getDataSourceInfo

The function is intended to get information on the data source for an indicator.

TABLE info getDataSourceInfo()

The function returns the Lua table with parameters:

IMPORTANT! For correct work of the function getDataSourceInfo called from Init function, rerun the QUIK Workstation after having added the indicator on graph.

Parameter	Type	Description
interval	NUMBER	Current interval (time frame) of a chart
class_code	STRING	Class code of the data source
sec_code	STRING	Security code of the data source
param	STRING	Name of the Quotes table parameter on which a chart is created. If the field is empty then a chart is created on the basis of the Time and Sales table

Valid values of Interval field:

Returned value	Interval
0	Tick
1	1 minute
2	2 minutes
3	3 minutes
4	4 minutes

Returned value	Interval
5	5 minutes
6	6 minutes
10	10 minutes
15	15 minutes
20	20 minutes

Returned value	Interval
30	30 minutes
60	1 hour
120	2 hours
240	4 hours

Returned value	Interval
-1	1 day
-2	1 week
-3	1 month

7.2.7 SetValue

The function is intended to set a specified value on a selected line for a certain indicator's candlestick:

```
BOOLEAN SetValue(NUMBER index, NUMBER line_number, NUMBER value)
```

The parameters:

- **index** – candlestick's index. Numbering starts with '1';
- **line_number** – line number. Numbering starts with '1';
- **value** – a value to be set. Numbering starts with 'nil'.

If executed successfully the function returns "true", otherwise "false".

The example is given below.

7.2.8 GetValue

The function is intended to determine the value set on a selected line for a certain indicator's candlestick:

```
NUMBER value GetValue(NUMBER index, NUMBER line_number)
```

The parameters:

- **index** – candlestick's index;
- **line_number** – line number.

The function returns **value** set for a **line_number** of the candlestick **index**. If an error occurs, the function returns 'nil'.

For example:

```
function OnCalculate(i)
    local ret_value = 0
    if i == 1 then
        ret_value = 1
```

```

    else
        ret_value = GetValue(i-1, 1)+2
    end
    if i%3 == 0 then
        ret_value = SetValue(i-1, 1, 2)
    end
    return ret_value
end

```

7.2.9 SetRangeValue

The function is intended to set a specified value on a selected line for a certain indices' interval of the indicator's candlestick:

BOOLEAN SetRangeValue(NUMBER line_number, NUMBER start_index, NUMBER end_index, NUMBER value)

The parameters:

- **line_number** – line number;
- **start_index** – index of the starting interval candlestick;
- **end_index** – index of the ending interval candlestick;
- **value** – a value to be set.

The function sets **value** for a **line_number** from the **start_index** to the **end_index** indices inclusively.

If executed successfully the function returns “true”, otherwise “false”.

For example:

```

function OnCalculate(index)
    local range = Settings.range
    if index >= range then
        SetValue(index-range, 1, nil)
        SetValue(index-range, 2, nil)

        SetValue(index-range+1, 1, H(index-range+1))
        SetValue(index-range+1, 2, L(index-range+1))
        SetRangeValue(1, index-range+2, index-1, nil)
        SetRangeValue(2, index-range+2, index-1, nil)

        --[[
        for i = index-range+2, index-1 do
            SetValue(i, 1, nil)
            SetValue(i, 2, nil)

```

```

        end
        --]]

        return H(index), L(index)
    else
        return nil, nil
    end
end
end

```

7.2.10 Settings Table

Table **Settings** contains settings of an indicator, in the script it is taken as global.

List of predefined fields with examples:

- **STRING Name** – line with name of an indicator;

```
Settings.Name = "Two MA"
```

- **STRING line[n].Name** – line with name of a line with number N. Indexes of lines start with 1;

```
Settings.line[1].Name = "First MA"
Settings.line[2].Name = "Second MA"
```

- **NUMBER line[n].Type** – type of displaying of a line. It is set using predefined constants: TYPE_LINE, TYPE_DASH, TYPE_DOT, TYPE_HISTOGRAM, TYPE_TRIANGLE_UP, TYPE_TRIANGLE_DOWN.

```
Settings.line[1].Type = TYPE_LINE --lines
Settings.line[2].Type = TYPE_DASH -- dashes
Settings.line[3].Type = TYPE_DOT - dots
```

- **NUMBER line[n].Width** – line thickness;

```
Settings.line[1].Width = 5
```

- **NUMBER line[n].Color** – line colour. Result of execution of function RGB;

```
Settings.line[1].Color = RGB(255, 0, 0)
Settings.line[2].Color = RGB(0, 255, 0)
```

Fields in table **Settings** are displayed in settings dialogue in User settings section. Types of user parameters: numbers and lines. Fields not defined in the script will be initialized with default values.

For parameters Settings.Name, Settings.line[n].Name (and any other custom string parameters) multi-string construction is not recommended to be used. When using a multi-string construction, only the first string is accounted, for example for parameter of the following view:

```
Settings.Name = [[Two
MA]]
```

string 'Two' becomes name of the indicator.

7.2.11 Example of Settings Dialogue Linked to Setting Table

The screenshot shows a Lua script in a text editor on the left and a settings dialog box on the right. The script defines a `Settings` table with parameters for two indicators: `DEMA` and `TEMA`. The `DEMA` indicator has a period of 9, a `k` value of 0.01, and a calculation mode of 4. The `TEMA` indicator has a period of 9, a `k` value of 0.01, and a calculation mode of 4. The settings dialog box, titled "Settings SRM4 [DEMA/TEMA]", shows the "General" tab. It includes a legend field, a graph type dropdown set to "Line", a checkbox for "Highlight in color", and color pickers for "Rise" (green), "Fall" (red), and "Line color" (red). There is also a "Thickness" slider. In the "Linking to axes" section, the "to right axis" radio button is selected. At the bottom, there are "Save", "Cancel", and "Help" buttons.

Changing setting in the dialogue leads to changes of the values of Settings table fields on working Lua computer without source code changes.

7.2.12 List of Functions Available from Script

- **getWorkingFolder** – returns the path on which info.exe file executing the script is located;

- **getScriptPath** – returns the path on which the run script is located;
- **getNumberOf** – returns the number of records in TableName table;
- **getItem** – returns the Lua table containing informations on data from a line with number Index from a table with name “TableName”;
- **getParamEx** – receives the values of all exchange data parameters from the Quoted table;
- **message** – displays the values QUIK terminal;
- **isConnected** – defines the state of workstation’s connection to server;
- **getTradeDate** – received the data of a trading session;
- **getInfoParam** – allows receiving parameters for information window (Connection / Information window);
- **getClassSecurities** – receives a list of securities codes for the list of classes set by codes list;
- **getClassInfo** – receives information on a class;
- **getClassesList** – receives a list of classes codes received from server during the session;
- **getSecurityInfo** – receives information on a security;
- **getQuoteLevel2** – receives the Level II quotes table for selected class and security;
- **getMoney** – receives information on cash limits;
- **getDepo** – receives information on securities limits;
- **sendTransaction** – function for working with orders;
- **SearchItems** – allows fast selecting of elements from the terminal storage and returns a table with indexes of elements that meet the search consitions;
- **getPortfolioInfo** – receives the values of parameters of Client portfolio table;
- **getBuySellInfo** – receives the values of parameters of Buy / Sell table;
- **getPortfolioInfoEx** – receives the values of parameters of Client portfolio table accounting the limit kind;
- **getBuySellInfoEx** – receives the values of parameters of Buy / Sell table accounting the limit kind;
- **getOrderByNumber** – returns the Lua table, containing description of parameters of the Orders table and index of an order to the terminal’s storage;
- **RGB** – converts components RGB (red, green, blue) into a single number;
- **AddLabel** – adds label with specified parameters;
- **DelLabel** – deletes label with specified parameters;
- **DelAllLabels** – deletes all labels on chart with the specified graph;
- **GetLabelParams** – gets label parameters;
- **SetLabelParams** – sets parameters for label with the specified identifier;
- **SetValue** – sets a specified value on a selected line for a certain indicator’s candlestick;
- **GetValue** – gets a value set on a selected line for a specified indicator’s candlestick;
- **SetRangeValue** – sets a specified value on a selected line for a certain indices’ interval of the indicator’s candlesticks.

7.2.13 Loading and Saving of an Indicator Configuration to File

When selecting the menu item **System / Save windows configuration to file...** all values from **Settings** table are saved in .wnd file.

When loading configuration from a file **qchart** module receives a list of indicators from **qlua** module and creates an indicator on its name automatically.

If the loaded indicator is not in the list (for example the file is deleted or the value of Settings. Name field is changed) the indicator is not displayed. To avoid disappearing of indicators when changing settings in Lua code the chart displays its legend and the dialogue of settings editing is available.

8. Thred-safe Functions for Working With Lua Tables

Simultaneous work with tables of the callback script functions and main() function can cause uncertain situations. To solve this problem qlua.dll provides thread-safe analogues of standard Lua functions.

Performing thread-safe function blocks execution of code on another thread before the end of the function.

Call format of thread-safe function coincides with call format of the analogic standard Lua function.

The table below shows the standard Lua functions and thread-safe functions corresponding to them:

Standard Lua function	Thred-safe function
-----------------------	---------------------

concat	sconcat
--------	---------

remove	sremove
--------	---------

insert	sinsert
--------	---------

sort	ssort
------	-------

9. Appendixes

9.1 Appendix 1. Example of a Lua Script

This application provides an example of a Lua script that creates a table in a QUIK Workstation.

Table_object.lua:

```
dofile (getScriptPath() .. "\\quik_table_wrapper.lua")
dofile (getScriptPath() .. "\\ntime.lua")
stopped = false
function format1(data)
    return string.format("0x%08X", data)
end

function format2(data)
    return string.format("%06d", data)
end

function OnStop(s)
    stopped = true
end

function main()
    -- turning 'sticks' in the table's heading
    local palochki = {"-", "\\ ", "|", "/" }
    -- create a QTable instance
    t = QTable.new()
    if not t then
        message("error!", 3)
        return
    else
        message("table with id = " .. t.t_id .. " created", 1)
    end

    -- add two columns with formatting functions
    -- the first column is for hex values, the second is for integers
    t:AddColumn("test1", QTABLE_INT_TYPE, 10, format1)
    t:AddColumn("test2", QTABLE_INT_TYPE, 10, format2)
    -- add columns without formatting
    t:AddColumn("test3", QTABLE_CACHED_STRING_TYPE, 50)
    t:AddColumn("test4", QTABLE_TIME_TYPE, 50)
    t:AddColumn("test5", QTABLE_CACHED_STRING_TYPE, 50)
```

```

t:SetCaption("Test")
t:Show()
i=1
-- loop until the user stops the script from the control dialogue
while not stopped do
    -- display the table again if it was closed
    -- all previous data will be purged
    if t:IsClosed() then
        t:Show()
    end
    -- turn the 'stick' by 45 degrees on each iteration
    t:SetCaption("QLUA TABLE TEST " .. palochki[i%4 +1])
    -- this method will add a new row to the table and return its number
    local row = t:AddLine()
    t:SetValue(row, "test1", row, i)
    t:SetValue(row, "test2", row, i)

    -- insert the current table header into the cell
    -- the column has the string type, so the last parameter is ignored
    SetCell(t.t_id, row, 3, GetWindowCaption(t.t_id))

    _date = os.date("*t")
    -- fill out the 4th column with time data (a number in the format
    <HHMMSS>)
    -- the function that returns a string presentation of time is defined
    in ntime.lua
    -- The NiceTime function returns a string
    SetCell(t.t_id, row, 4,
        NiceTime(_date) .. string.format(" (%02d:%02d:%02d)", _date.hour,
        _date.min, _date.sec),
        _date.hour*10000+_date.min*100 +_date.sec)
    -- the fifth column has the string type, and it is filled out with the
    results of the NiceTime function
    -- the function's source code is taken from the Conky Lua widget for
    Ubuntu
    SetCell(t.t_id, row, 5, NiceTime(_date))
    sleep(1000)
    i=i+1
end
message("finished")
end

```

Quik_table_wrapper.lua:

```

-- Reloading the message function with an optional second parameter

```

```

old_message = message
function message(v, i)
    old_message(tostring(v), i or 1)
end

QTable = {}
QTable.__index = QTable

-- Create and initialize a QTable instance
function QTable.new()
    local t_id = AllocTable()
    if t_id ~= nil then
        q_table = {}
        setmetatable(q_table, QTable)
        q_table.t_id=t_id
        q_table.caption = ""
        q_table.created = false
        q_table.curr_col=0
        -- a table with column parameters description
        q_table.columns={}
        return q_table
    else
        return nil
    end
end

function QTable:Show()
    -- display a window with the created table in the terminal
    CreateWindow(self.t_id)
    if self.caption ~= "" then
        -- set the window's caption
        SetWindowCaption(self.t_id, self.caption)
    end
    self.created = true
end

function QTable:IsClosed()
    -- if the table window is closed, 'true' is returned
    return IsWindowClosed(self.t_id)
end

function QTable:delete()
    -- delete the table
    DestroyTable(self.t_id)
end

```

```

function QTable:GetCaption()
    if IsWindowClosed(self.t_id) then
        return self.caption
    else
        -- returns a string that contains the table caption
        return GetWindowCaption(self.t_id)
    end
end

-- Set the table caption
function QTable:SetCaption(s)
    self.caption = s
    if not IsWindowClosed(self.t_id) then
        res = SetWindowCaption(self.t_id, tostring(s))
    end
end

-- Add the description of the <name> column of the <c_type> type into the table
-- <ff> - the function that format data for display
function QTable:AddColumn(name, c_type, width, ff )
    local col_desc={}
    self.curr_col=self.curr_col+1
    col_desc.c_type = c_type
    col_desc.format_function = ff
    col_desc.id = self.curr_col
    self.columns[name] = col_desc
    -- <name> is often used as a table title
    AddColumn(self.t_id, self.curr_col, name, true, c_type, width)
end

function QTable:Clear()
    -- clear the table
    Clear(self.t_id)
end

-- set values in the cell
function QTable:SetValue(row, col_name, data)
    local col_ind = self.columns[col_name].id or nil
    if col_ind == nil then
        return false
    end
    -- if the formatting function is set for this column, it will be used
    local ff = self.columns[col_name].format_function

    if type(ff) == "function" then
        -- the result of the formatting function is used
    end
end

```

```

        -- a string representation
        SetCell(self.t_id, row, col_ind, ff(data), data)
        return true
    else
        SetCell(self.t_id, row, col_ind, tostring(data), data)
    end
end

end

function QTable:AddLine()
    -- adds an empty line to the end of the table and returns its number
    return InsertRow(self.t_id, -1)
end

function QTable:GetSize()
    -- returns the table size
    return GetTableSize(self.t_id)
end

-- Retrieve data from a cell by row and column numbers
function QTable:GetValue(row, name)
    local t={}
    local col_ind = self.columns[name].id
    if col_ind == nil then
        return nil
    end
    t = GetCell(self.t_id, row, col_ind)
    return t
end

-- Set window's coordinates
function QTable:SetPosition(x, y, dx, dy)
    return SetWindowPos(self.t_id, x, y, dx, dy)
end

-- This function returns the window's coordinates
function QTable:GetPosition()
    top, left, bottom, right = GetWindowRect(self.t_id)
    return top, left, right-left, bottom-top
end
end

```

Ntime.lua:

```

words = {"one ", "two ", "three ", "four ", "five ", "six ", "seven ", "eight ",
"nine "}

```

```

levels = {"thousand ", "million ", "billion ", "trillion ", "quadrillion ",
"quintillion ", "sextillion ", "septillion ", "octillion ", [0] = ""}
iwords = {"ten ", "twenty ", "thirty ", "forty ", "fifty ", "sixty ", "seventy ",
"eighty ", "ninety "}
twords = {"eleven ", "twelve ", "thirteen ", "fourteen ", "fifteen ", "sixteen ",
"seventeen ", "eighteen ", "nineteen "}

function digits(n)
    local i, ret = -1
    return function()
        i, ret = i + 1, n % 10
        if n > 0 then
            n = math.floor(n / 10)
            return i, ret
        end
    end
end

level = false
function getname(pos, dig)
    level = level or pos % 3 == 0
    if(dig == 0) then return "" end
    local name = (pos % 3 == 1 and iwords[dig] or words[dig]) .. (pos % 3 == 2 and
"hundred " or "")
    if(level) then name, level = name .. levels[math.floor(pos / 3)], false end
    return name
end

function numberToWord(number)
    if(number == 0) then return "zero" end
    vword = ""
    for i, v in digits(number) do
        vword = getname(i, v) .. vword
    end

    for i, v in ipairs(words) do
        vword = vword:gsub("ty " .. v, "ty-" .. v)
        vword = vword:gsub("ten " .. v, twords[i])
    end
    return vword
end

function _Time(t)
    hour = t.hour
    minute = t.min
    hour = hour % 12

```

```

    if(hour == 0) then
    hour, nextHourWord = 12, "one "
    else
    nextHourWord = numberToWord(hour+1)
    end
    hourWord = numberToWord(hour)
    if(minute == 0 ) then
    return hourWord .. "o'clock"
    elseif(minute == 30) then
    return "half past " .. hourWord
    elseif(minute == 15) then
    return "a quarter past " .. hourWord
    elseif(minute == 45) then
    return "a quarter to " .. nextHourWord
    else
    if(minute < 30) then
    return numberToWord(minute) .. "past " .. hourWord
    else
    return numberToWord(60-minute) .. "to " .. nextHourWord
    end
    end
end

function _Seconds(s)
    return numberToWord(s)
end

function NiceTime(t)
    return _Time(t) .. "and " .. _Seconds(t.sec) .. "second"
end

```

This script creates the following table in a QUIK Workstation:

	test1	test2	test3	test4	test5
1	0x00000001	000001	QLUA TABLE TEST \	twelve to five and eleven second (16:48:11)	twelve to five and eleven second
2	0x00000002	000002	QLUA TABLE TEST	twelve to five and twelve second (16:48:12)	twelve to five and twelve second
3	0x00000003	000003	QLUA TABLE TEST /	twelve to five and thirteen second (16:48:13)	twelve to five and thirteen second
4	0x00000004	000004	QLUA TABLE TEST -	twelve to five and fourteen second (16:48:14)	twelve to five and fourteen second
5	0x00000005	000005	QLUA TABLE TEST \	twelve to five and fifteen second (16:48:15)	twelve to five and fifteen second
6	0x00000006	000006	QLUA TABLE TEST	twelve to five and sixteen second (16:48:16)	twelve to five and sixteen second
7	0x00000007	000007	QLUA TABLE TEST /	twelve to five and seventeen second (16:48:17)	twelve to five and seventeen second
8	0x00000008	000008	QLUA TABLE TEST -	twelve to five and eighteen second (16:48:18)	twelve to five and eighteen second
9	0x00000009	000009	QLUA TABLE TEST \	twelve to five and nineteen second (16:48:19)	twelve to five and nineteen second
10	0x0000000A	000010	QLUA TABLE TEST	twelve to five and twenty second (16:48:20)	twelve to five and twenty second
11	0x0000000B	000011	QLUA TABLE TEST /	twelve to five and twenty-one second (16:48:21)	twelve to five and twenty-one second
12	0x0000000C	000012	QLUA TABLE TEST -	twelve to five and twenty-two second (16:48:22)	twelve to five and twenty-two second

9.2 Appendix 2. Examples of sorting in tables

Examples of sorting in a table's column that contains data of numeric ('test4') and string ('test5') types:

	test1	test2	test3	test4	test5
1	0x00000001	000001	QLUA TABLE TEST \	twelve to five and eleven second (16:48:11)	twelve to five and eleven second
2	0x00000002	000002	QLUA TABLE TEST	twelve to five and twelve second (16:48:12)	twelve to five and twelve second
3	0x00000003	000003	QLUA TABLE TEST /	twelve to five and thirteen second (16:48:13)	twelve to five and thirteen second
4	0x00000004	000004	QLUA TABLE TEST -	twelve to five and fourteen second (16:48:14)	twelve to five and fourteen second
5	0x00000005	000005	QLUA TABLE TEST \	twelve to five and fifteen second (16:48:15)	twelve to five and fifteen second
6	0x00000006	000006	QLUA TABLE TEST	twelve to five and sixteen second (16:48:16)	twelve to five and sixteen second
7	0x00000007	000007	QLUA TABLE TEST /	twelve to five and seventeen second (16:48:17)	twelve to five and seventeen second
8	0x00000008	000008	QLUA TABLE TEST -	twelve to five and eighteen second (16:48:18)	twelve to five and eighteen second
9	0x00000009	000009	QLUA TABLE TEST \	twelve to five and nineteen second (16:48:19)	twelve to five and nineteen second
10	0x0000000A	000010	QLUA TABLE TEST	twelve to five and twenty second (16:48:20)	twelve to five and twenty second
11	0x0000000B	000011	QLUA TABLE TEST /	twelve to five and twenty-one second (16:48:21)	twelve to five and twenty-one second
12	0x0000000C	000012	QLUA TABLE TEST -	twelve to five and twenty-two second (16:48:22)	twelve to five and twenty-two second

	test1	test2	test3	test4	test5
1	0x00000008	000008	QLUA TABLE TEST -	twelve to five and eighteen second (16:48:18)	twelve to five and eighteen second
2	0x00000001	000001	QLUA TABLE TEST \	twelve to five and eleven second (16:48:11)	twelve to five and eleven second
3	0x00000005	000005	QLUA TABLE TEST \	twelve to five and fifteen second (16:48:15)	twelve to five and fifteen second
4	0x00000004	000004	QLUA TABLE TEST -	twelve to five and fourteen second (16:48:14)	twelve to five and fourteen second
5	0x00000009	000009	QLUA TABLE TEST \	twelve to five and nineteen second (16:48:19)	twelve to five and nineteen second
6	0x00000007	000007	QLUA TABLE TEST /	twelve to five and seventeen second (16:48:17)	twelve to five and seventeen second
7	0x00000006	000006	QLUA TABLE TEST	twelve to five and sixteen second (16:48:16)	twelve to five and sixteen second
8	0x00000003	000003	QLUA TABLE TEST /	twelve to five and thirteen second (16:48:13)	twelve to five and thirteen second
9	0x00000002	000002	QLUA TABLE TEST	twelve to five and twelve second (16:48:12)	twelve to five and twelve second
10	0x0000000A	000010	QLUA TABLE TEST	twelve to five and twenty second (16:48:20)	twelve to five and twenty second
11	0x0000000B	000011	QLUA TABLE TEST /	twelve to five and twenty-one second (16:48:21)	twelve to five and twenty-one second
12	0x0000000C	000012	QLUA TABLE TEST -	twelve to five and twenty-two second (16:48:22)	twelve to five and twenty-two second

9.3 Appendix 3. Examples of Processing Table Events

Examples of processing mouse and keyboard events

```

stopped = false
t_id = nil

old_message = message
local fmt = string.format
function message(v, t)
    t= t or 1
    old_message(tostring(v), t)
end

function OnStop(s)
    stopped = true
    if t_id~= nil then
        DestroyTable(t_id)
    end
end

event_table = {
    [QTABLE_LBUTTONDOWN] = 'Left mouse button is clicked',
    [QTABLE_RBUTTONDOWN] = 'Right mouse button is clicked',
    [QTABLE_LBUTTONDBLCLK] = 'Left mouse button is double-clicked',
    [QTABLE_RBUTTONDBLCLK] = 'Right mouse button is double-clicked',
    [QTABLE_SELCHANGED] = 'Row is changed',
    [QTABLE_CHAR] = "Character key",
    [QTABLE_VKEY] = "Some other key",
    [QTABLE_CONTEXTMENU] = "Shortcut menu",
    [QTABLE_MBUTTONDOWN] = "Mouse wheel is clicked",

```

```

        [QTABLE_MBUTTONDBLCLK] = "Mouse wheel is double-clicked",
        [QTABLE_LBUTTONUP] = 'Left mouse button is released',
        [QTABLE_RBUTTONUP] = 'Right mouse button is released',
        [QTABLE_CLOSE] = "Table is closed"
    }
end

function event_callback_str(t_id, msg, par1, par2)
    local str = fmt("%s, par1 = %d, par2 = %d", event_table[msg], par1, par2)
    SetWindowCaption(t_id, str)
    message(str)
end

local p_row = -1
local p_col = -1
function event_callback_color(t_id, msg, par1, par2)
    if par1==3 and par2 == 1 then
        os.exit()
    end
    if msg == QTABLE_LBUTTONDOWN then
        if p_col ~= -1 and p_col ~= -1 then
            SetColor(t_id, p_row, p_col, QTABLE_DEFAULT_COLOR,
QTABLE_DEFAULT_COLOR, QTABLE_DEFAULT_COLOR, QTABLE_DEFAULT_COLOR)
        end
        SetColor(t_id, par1, par2, RGB(240, 128, 128), QTABLE_DEFAULT_COLOR,
QTABLE_DEFAULT_COLOR, QTABLE_DEFAULT_COLOR)
        p_row = par1
        p_col = par2
    end
end

function main()

    data = {
        {"1", 2, 20130530},
        {"4", 5, 20130529},
        {"7", 8, 20130528}
    }

    t_id = AllocTable()
    message (t_id)
    AddColumn(t_id, 1, "string", true, QTABLE_CACHED_STRING_TYPE, 10)
    AddColumn(t_id, 2, "number", true, QTABLE_INT_TYPE, 10)
    AddColumn(t_id, 3, "date", true, QTABLE_DATE_TYPE, 10)
    CreateWindow(t_id)

    for _, v in pairs(data) do

```

```

        row = InsertRow(t_id, -1)
        SetCell(t_id, row, 1, v[1])
        SetCell(t_id, row, 2, string.format("value = %d",v[2]), v[2])
        SetCell(t_id, row, 3, string.format("%04d - %02d - %02d",v[3]/10000,
(v[3]%10000)/100, v[3]%100), v[3])
    end
    SetWindowCaption(t_id, "EXAMPLE")
    SetTableNotificationCallback(t_id, event_callback_str)
    sleep(5000)
    SetTableNotificationCallback(t_id, event_callback_color)
    SetCell(t_id, 3, 1, "DO NOT CLICK ME")
    SetTableNotificationCallback(t_id, dummy)

    while not stopped do
        sleep(100)
    end
end
end

```

Example of the 'Tic tac toe' game's implementation

```

--[[ TIC-TAC-TOE
by Evan Hahn (http://evanhahn.com/how-to-code-tic-tac-toe-and-a-lua-implementation/)
--]]

-----
-- Configuration (change this if you wish!) --
-----

t_id=nil --grid
-- Are they playable by human or computer-controlled?
PLAYER_1_HUMAN = true
PLAYER_2_HUMAN = false

-- Board size
BOARD_RANK = 3      -- The board will be this in both dimensions.

-- Display stuff
PLAYER_1 = "[x]"     -- Player 1 is represented by this. Player 1 goes first.
PLAYER_2 = "[o]"     -- Player 2 is represented by this.
EMPTY_SPACE = "[ ]"  -- An empty space is displayed like this.
DISPLAY_HORIZONTAL_SEPARATOR = "-"      -- Horizontal lines look like this.
DISPLAY_VERTICAL_SEPARATOR = " | "      -- Vertical lines look like this

--[[ #####
####   Don't mess with things below here unless you are brave   ####

```

```

##### --]]

-----
-- More configuration --
-----

MAX_BOARD_RANK = 100-- Won't run above this number. Prevents crashes.

-----
-- Don't run if the board is larger than the maximum --
-----

if BOARD_RANK > MAX_BOARD_RANK then os.exit(0) end

-----
-- Create board (2D table) --
-----

space = {}
for i = 0, (BOARD_RANK - 1) do
    space[i] = {}
    for j = 0, (BOARD_RANK - 1) do
        space[i][j] = nil    -- start each space with nil
    end
end

end

-----
-- Board functions --
-----

-- get the piece at a given spot
function getPiece(x, y)
    return space[x][y]
end

-- get the piece at a given spot; if nil, return " "
-- this is useful for output.
function getPieceNotNil(x, y)
    if getPiece(x, y) ~= nil then
        return getPiece(x, y)
    else
        return EMPTY_SPACE
    end
end

end

-- is that space empty?

```

```

function isEmpty(x, y)
    if getPiece(x, y) == nil then
        return true
    else
        return false
    end
end

-- place a piece there, but make sure nothing is there already.
-- if you can't play there, return false.
function placePiece(x, y, piece)
    if isEmpty(x, y) == true then
        space[x][y] = piece
        return true
    else
        return false
    end
end

-- is the game over?
function isGameOver()
    if checkWin() == false then      -- if there is no win...
        for i = 0, (BOARD_RANK - 1) do  -- is the board empty?
            for j = 0, (BOARD_RANK - 1) do
                if isEmpty(i, j) == true then return false end
            end
        end
        return true
    else  -- there is a win; the game is over
        return true
    end
end

-- create a string made up of a certain number of smaller strings
-- this is useful for the display.
function repeatString(to_repeat, amount)
    if amount <= 0 then return "" end
    local to_return = ""
    for i = 1, amount do
        to_return = to_return .. to_repeat
    end
    return to_return
end

-- display the board.
-- this uses the configuration file pretty much entirely.

```

```

function displayBoard()
    for i = (BOARD_RANK - 1), 0, -1 do
        for j = 0, (BOARD_RANK - 1) do    -- generate that row
            local piece = getPieceNotNil(j, i)
            SetCell(t_id, i+1, j+1, piece)
        end
    end
end

-----
-- Create regions (I admit this is a bit ugly) --
-----

-- declare region and a number to increment
region = {}
region_number = 0

-- vertical
for i = 0, (BOARD_RANK - 1) do
    region[region_number] = {}
    for j = 0, (BOARD_RANK - 1) do
        region[region_number][j] = {}
        region[region_number][j]["x"] = i
        region[region_number][j]["y"] = j
    end
    region_number = region_number + 1
end

-- horizontal
for i = 0, (BOARD_RANK - 1) do
    region[region_number] = {}
    for j = 0, (BOARD_RANK - 1) do
        region[region_number][j] = {}
        region[region_number][j]["x"] = j
        region[region_number][j]["y"] = i
    end
    region_number = region_number + 1
end

-- diagonal, bottom-left to top-right
region[region_number] = {}
for i = 0, (BOARD_RANK - 1) do
    region[region_number][i] = {}
    region[region_number][i]["x"] = i
    region[region_number][i]["y"] = i
end

```

```

region_number = region_number + 1

-- diagonal, top-left to bottom-right
region[region_number] = {}
for i = (BOARD_RANK - 1), 0, -1 do
    region[region_number][i] = {}
    region[region_number][i]["x"] = BOARD_RANK - i - 1
    region[region_number][i]["y"] = i
end
region_number = region_number + 1

-----
-- Region functions --
-----

-- get a region
function getRegion(number)
    return region[number]
end

-- check for a win in a particular region.
-- returns a number representation of the region. occurrences of player 1
-- add 1, occurrences of player 2 subtract 1. so if there are two X pieces,
-- it will return 2. one O will return -1.
function checkWinInRegion(number)
    local to_return = 0
    for i, v in pairs(getRegion(number)) do
        local piece = getPiece(v["x"], v["y"])
        if piece == PLAYER_1 then to_return = to_return + 1 end
        if piece == PLAYER_2 then to_return = to_return - 1 end
    end
    return to_return
end

-- check for a win in every region.
-- returns false if no winner.
-- returns the winner if there is one.
function checkWin()
    for i in pairs(region) do
        local win = checkWinInRegion(i)
        if math.abs(win) == BOARD_RANK then
            if win == math.abs(win) then
                return PLAYER_1
            else
                return PLAYER_2
            end
        end
    end
end

```

```

        end
    end
    return false
end

-----
-- UI Functions --
-----

-- human play
function humanPlay(piece)
    message("Human turn")
    displayBoard()
    local placed = false
    while placed == false do    -- loop until they play correctly
        sleep(100)
        if g_X ~= -1 and g_Y ~= -1 then
            local x = tonumber(g_Y)-1
            local y = tonumber(g_X)-1
            g_X = -1
            g_Y = -1
            message("clicked in " .. x .. " and " .. y)
            placed = placePiece(x, y, piece)
            if placed == false then
                message("I'm afraid you can't play there!")
            end
        end
    end
    end
    displayBoard()

end

-- AI play
function AIPlay(piece)

    -- am I negative or positive?
    local me = 0
    if piece == PLAYER_1 then me = 1 end
    if piece == PLAYER_2 then me = -1 end

    -- look for a region in which I can win
    for i in pairs(region) do
        local win = checkWinInRegion(i)
        if win == ((BOARD_RANK - 1) * me) then
            for j, v in pairs(getRegion(i)) do
                if isEmpty(v["x"], v["y"]) == true then

```



```

        placePiece(v["x"], v["y"], piece)
        return
    end
end
end
end

-- look for a region in which I can block
for i in pairs(region) do
    local win = checkWinInRegion(i)
    if win == ((BOARD_RANK - 1) * (me * -1)) then
        for j, v in pairs(getRegion(i)) do
            if isEmpty(v["x"], v["y"]) == true then
                placePiece(v["x"], v["y"], piece)
                return
            end
        end
    end
end
end

-- play first empty space, if no better option
for i = 0, (BOARD_RANK - 1) do
    for j = 0, (BOARD_RANK - 1) do
        if placePiece(i, j, piece) ~= false then return end
    end
end

end

g_X=-1
g_Y=-1
function event_callback(t_id, msg, par1, par2)
    if msg == QTABLE_LBUTTONDOWN then
        g_X = par1
        g_Y = par2
    end
end

old_message = message
local fmt = string.format
function message(v, t)
    t= t or 1
    old_message(tostring(v), t)
end

function main()
    t_id = AllocTable()

```

```

AddColumn(t_id, 1, "", true, QTABLE_CACHED_STRING_TYPE, 5)
AddColumn(t_id, 2, "", true, QTABLE_CACHED_STRING_TYPE, 5)
AddColumn(t_id, 3, "", true, QTABLE_CACHED_STRING_TYPE, 5)
CreateWindow(t_id)
for i=1, 3 do
    row = InsertRow(t_id, -1)
    SetCell(t_id, row, 1, "[ ]")
    SetCell(t_id, row, 2, "[ ]")
    SetCell(t_id, row, 3, "[ ]")
end
SetTableNotificationCallback(t_id, event_callback)
message("Welcome to Tic-Tac-Toe!")

-- play the game until someone wins
while true do
    sleep(100)
    -- break if the game is won
    if isGameOver() == true then
        break
    end
    -- player 1
    if PLAYER_1_HUMAN == true then
        humanPlay(PLAYER_1)
    else
        AIPlay(PLAYER_1)
    end

    if isGameOver() == true then
        break
    end

    if PLAYER_2_HUMAN == true then
        humanPlay(PLAYER_2)
    else
        AIPlay(PLAYER_2)
    end
end

-- show the final board
displayBoard()

-- write who won, or if there is a tie
win = checkWin()
if win == false then
    message("Tie game!\n")
else

```

```

        message(win)
        message(" wins!\n")
    end
end

```

9.4 Appendix 4. Examples of Using the 'params' Parameter in the 'SearchItems' Function

Example 1

If the last parameter in the **SearchItems** function is not set, an anonymous trade is passed to the **fn** callback function as a Lua table:

```

function fn(t)
    if t.qty == 103 then
        return true
    else
        return false
    end
end

t1 = SearchItems("all_trades", 0, getNumberOf("all_trades")-1, fn)

```

Example 2

If the list of fields is set, the parameters are passed to the **fn** function in the same order in which they are listed in the list of parameters. In this example, par1 contains the qty field, par2 contains class_code, par3 contains sec_code.

If the element doesn't have these fields, 'nil' is passed as a parameter.

```

function fn(par1, par2, par3)
    if par1 == 103 and par2 == "SPBFUT" and par3 == "RIM3" then
        return true
    else
        return false
    end
end

t1 = SearchItems("all_trades", 0, getNumberOf("all_trades")-1, fn, "qty,class_code,sec_code")

```

Example 3

In this example, par1 will be equal nil, par2 – class_code, par3 – sec_code.

```

function fn(par1, par2, par3)
    if par1 == 103 and par2 == "SPBFUT" and par3 == "RIM3" then
        return true
    else
        return false
    end
end
t1 = SearchItems("all_trades", 0, getNumberOf("all_trades")-1, fn, "test,class_code,
sec_code")

```

Example 4

Elements of embedded tables are separated by a period, for example:

```

function fn(par1, par2)
    if par1 == 17 and par2 == 5 then
        return true
    else
        return false
    end
end
t1 = SearchItems("all_trades", 0, getNumberOf("all_trades")-1, fn, "datetime.hour,
datetime.min")

```