3D Vision

Overview

Geometric Deep Learning

What you will learn in this course

Low-Level Vision

Image Processing:
Photometric Image formation
Point Operations
Histogram Equalization
Linear & Non-Linear filters
Convolution & Cross correlation

Feature Detection:
Edge detection
Corner detection
Line detection

Feature Description:
SIFT
Feature Matching
Image Stitching
Panorama

Geometric Vision

Transformation and Camera Mode:
Geometric Image Formation
Pinhole Camera Model

Camera Calibration:
Estimating intrinsics
Estimating extrinsics

Visual Understanding

Object Detection & Tracking:
Single-stage detectors
Two-stage detectors
YOLO
Object tracking

Image Segmentation:
Traditional Image Segmentation
Learning-based Image Segmentation

Machine Learning for CV

Machine Learning for Classification:
k-NN
Linear Classifier

Deep Learning:
Optimization
Neural Network
CNN
CNN architectures:

Generative & Geometric Learning

Generative Models:
AE, VAE, GAN

3D Vision and 3D Deep Learning:
3D shape representations
Geometric deep learning overview
3D Deep Learning models : pointnet

What we will learn today

- 3D Representations
- Point Cloud Processing
- 3D Deep Learning
  - Multiview images
  - Voxels
  - Point Cloud
  - Polygon Mesh
  - Signed Distance Function (SDF)

3D Vision

3D, 3D Everywhere

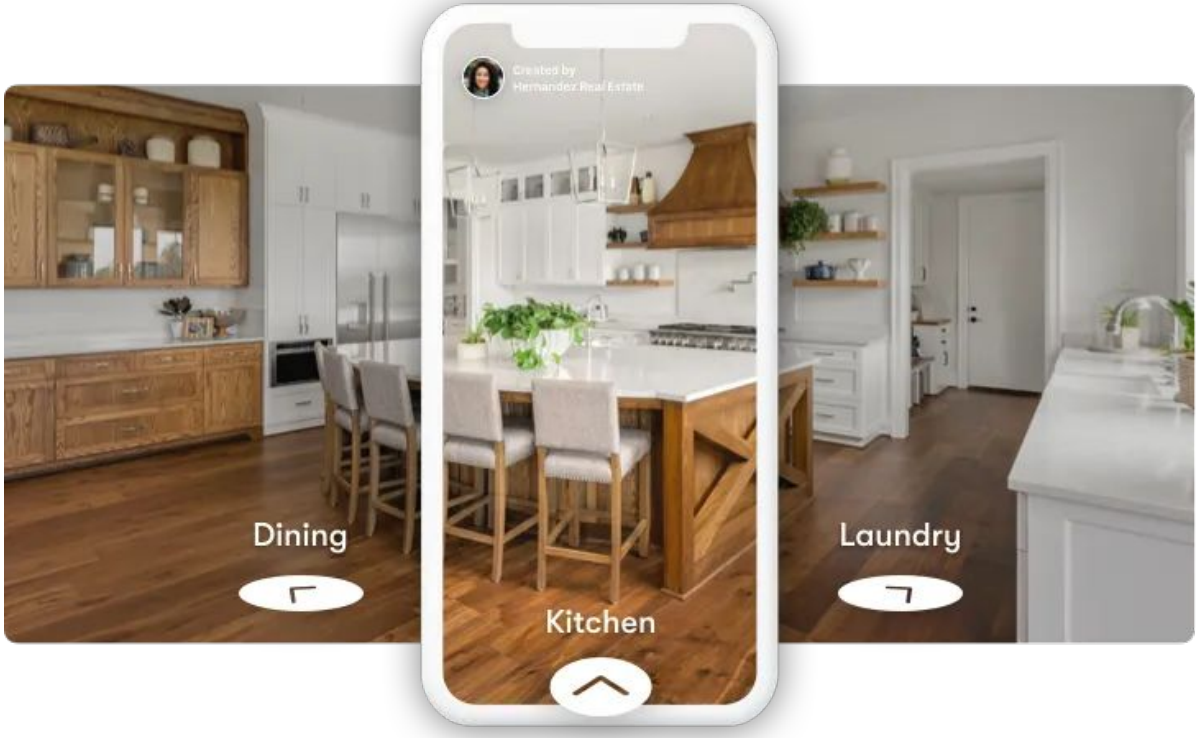

Image from: Zillow, 3D Virtual Tour

3D Vision

3D, 3D Everywhere

Image from: Advice

3D Vision

3D, 3D Everywhere

3D Vision

3D, 3D Everywhere

Image from: Meta Quest

3D Vision

3D, 3D Everywhere



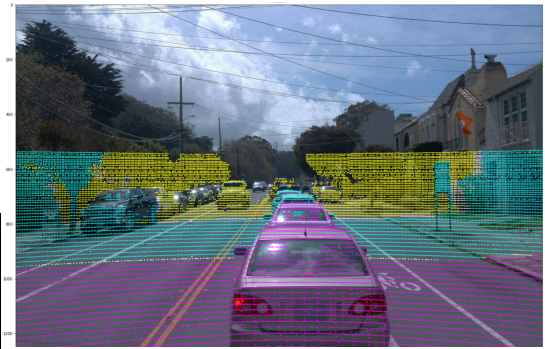

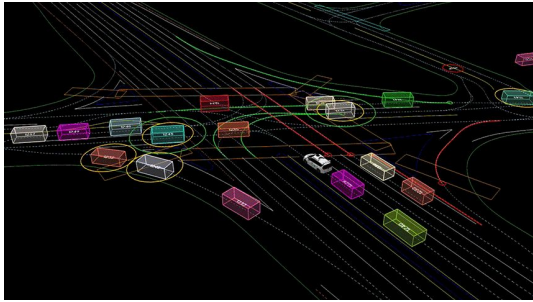

Image from: Waymo

3D Vision

3D, 3D Everywhere

Image from: Creaform3d

3D Representations

3D Representation

Many ways to represent geometry

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Cherdsak Kingkan

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Many ways to represent geometry

But what is the best representation ?

well, depends ..

Acquisition vs Editing vs Animation vs Prediction vs Processing vs Optimization ...

Explicit **Implicit**

Non-parametric





Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

3D Representation

2.5D Representation: Depth Maps

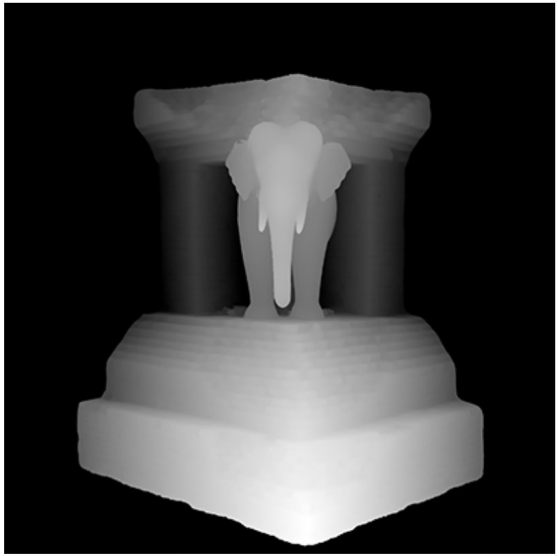

An **image** that represents how far each pixel ***p*** is $D[\mathbf{p}] \in \mathbb{R}^+$

The 'standard' image processing tools can be used

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

3D Representation

2.5D Representation: Depth Maps

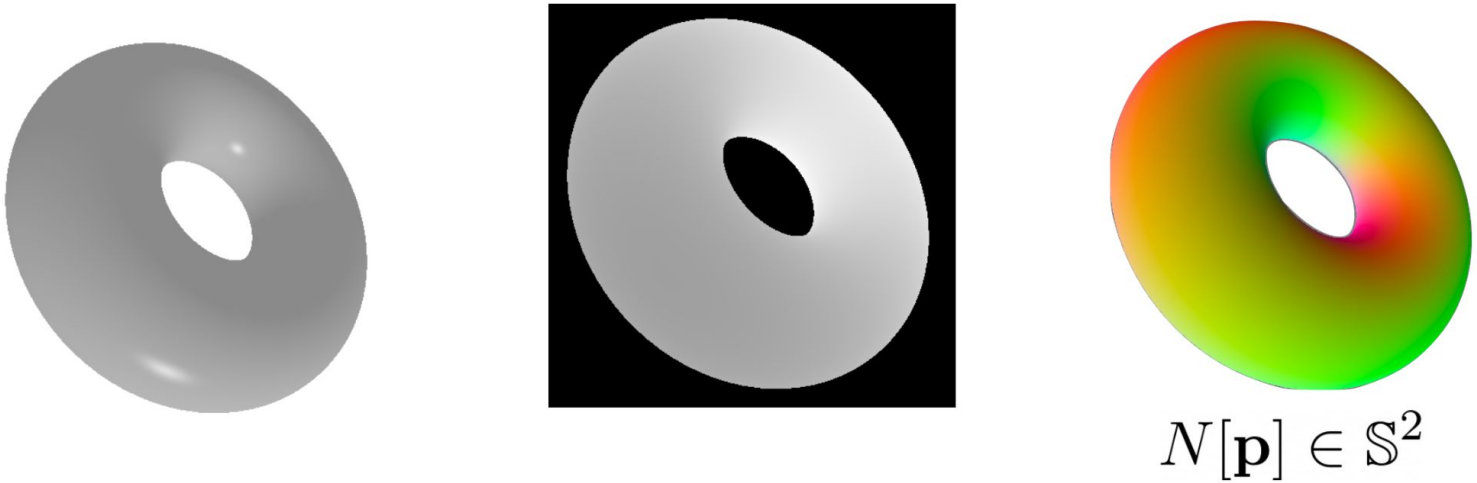

Normal Maps: Can extend to capture other surfaceproperties e.g. surface normals

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

3D Representation

2.5D Representation: Depth Maps

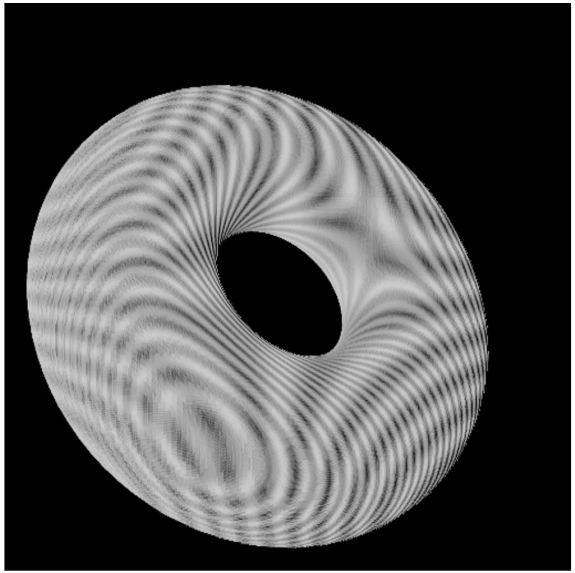

Representing the Visible

- Does not capture the ‘full’ 3D Structure
- ‘2.5D’ representations – properties associated to image pixels

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

3D Representation

Many ways to represent geometry

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Cherdsak Kingkan

3D Representation

Point Cloud

What is Point Cloud?

Point cloud is a set of points which can be represented by its coordinates (x, y, z) in 3D space.

3D Representation

Point Cloud

Organized Point Cloud

- Data is split into rows and columns.
- Advantages
  - Knowing relationship between points
  - Speed up the computation of some algorithm



Unorganized Point Cloud

- The order of points in the data structure is random.

3D Representation

Point Cloud

Why Point Cloud

- Point cloud is close to raw sensor data and **easy to acquired** by low-cost 3D scanning sensors
- Point cloud is **simple, flexible and scalable** representation: only points, no connectivity.
- Point cloud is **canonical**

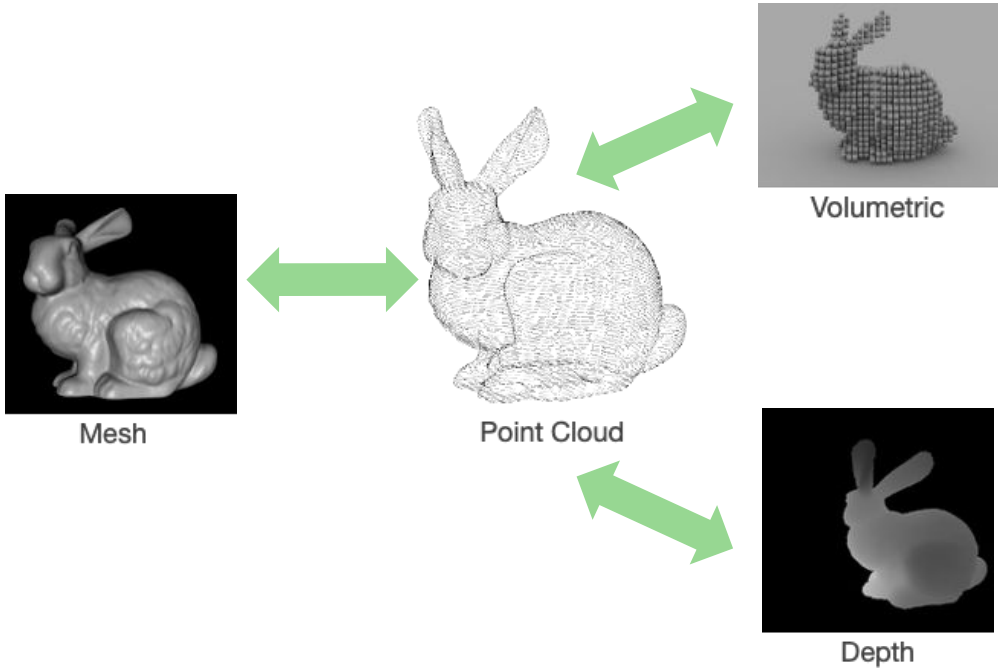

3D Representation

Point Cloud

Why Point Cloud

- Point cloud is close to raw sensor data and **easy to acquired** by low-cost 3D scanning sensors
- Point cloud is **simple, flexible and scalable** representation: only points, no connectivity.
- Point cloud is **canonical**

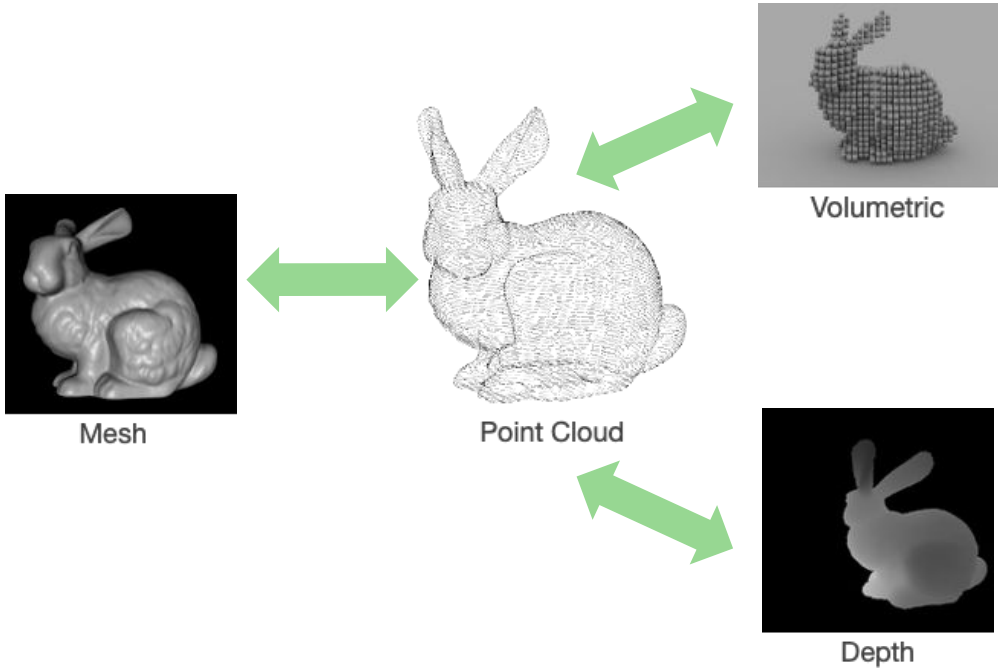

Limitations

- No explicit 'connectivity' information
- No simplification or subdivision
- No direction smooth rendering

3D Representation

Polygonal Meshes

- Consists of vertices and faces
- Boundary representations of objects
- Piecewise linear approximations of underlying surface
- Triangular Meshes: a face consists of **<u>three</u>** vertices

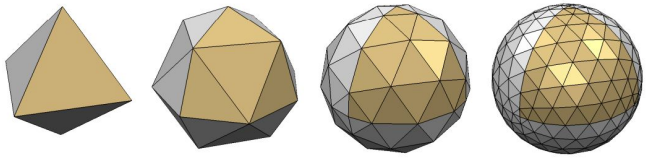

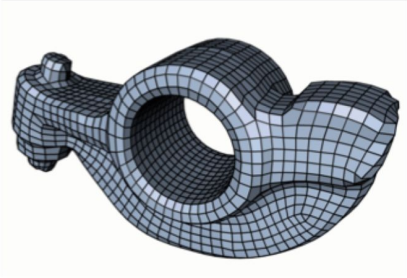

Vertices



Positions of Vertices

Faces



Connectivity (indices of vertices that make a face)

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Polygonal Meshes - Mesh operations

Mesh Upsampling - Subdivision

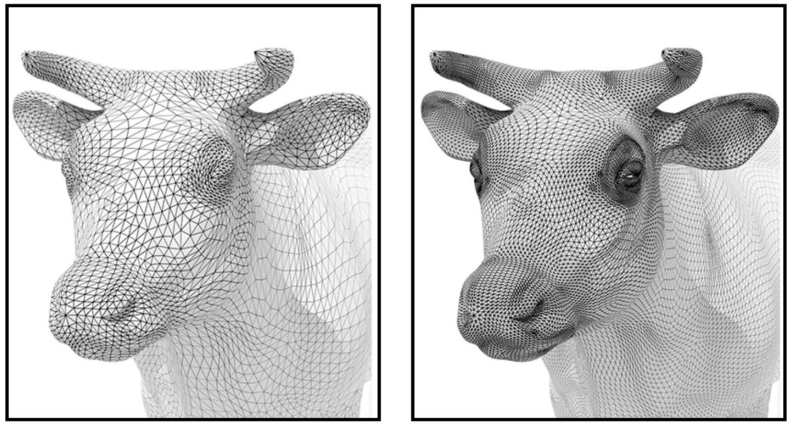

Increase resolution via interpolation

Mesh Downsampling - Simplification

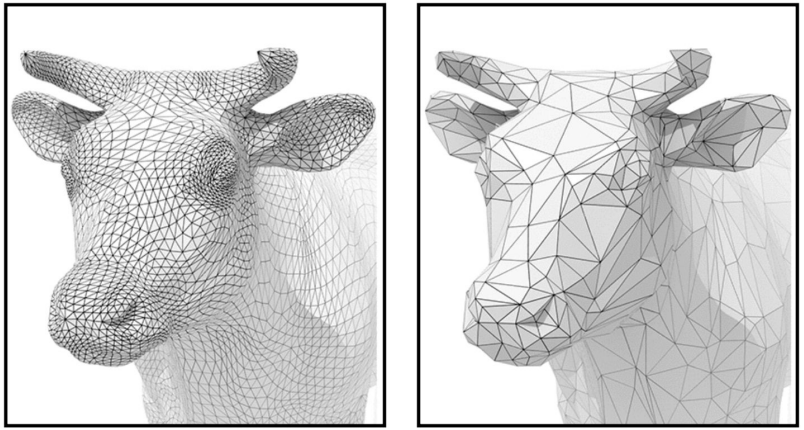

Decrease resolution; try to preserve shape/appearance

Mesh Regularization

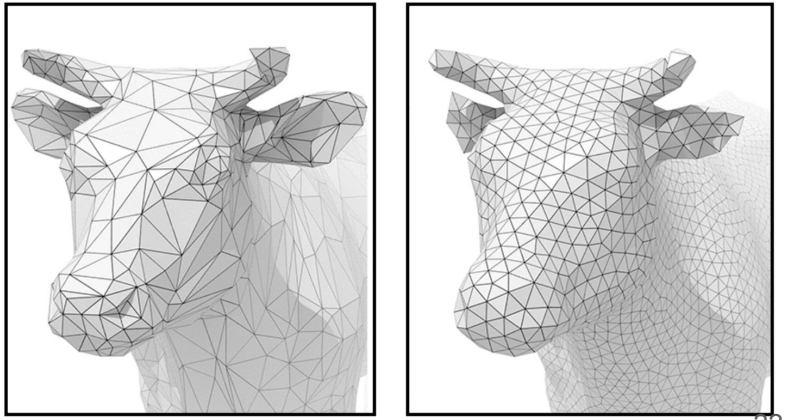

Modify sample distribution to improve quality

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Many ways to represent geometry

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric





Splines

Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Cherdsak Kingkan

3D Representation

Parametric Representation : Parametric Surfaces in 2D

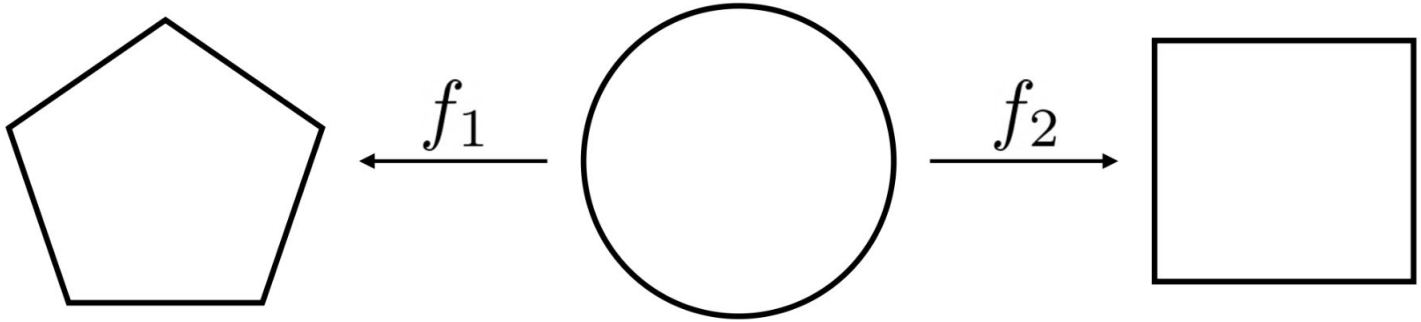

$$f(\mathbf{u}) = \mathbf{p} \in \mathbb{R}^2; \ \mathbf{u} \in \mathbb{S}^1$$

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

3D Representation

Parametric Representation : Parametric Curves

Explicit curve/circle in 2D

$$\mathbf{p} : \mathbb{R} \to \mathbb{R}^2$$

$$t \mapsto \mathbf{p}(t) = (x(t), y(t))$$

$$\mathbf{p}(t) = r\,(\cos(t), \sin(t))$$

$$t \in [0, 2\pi)$$

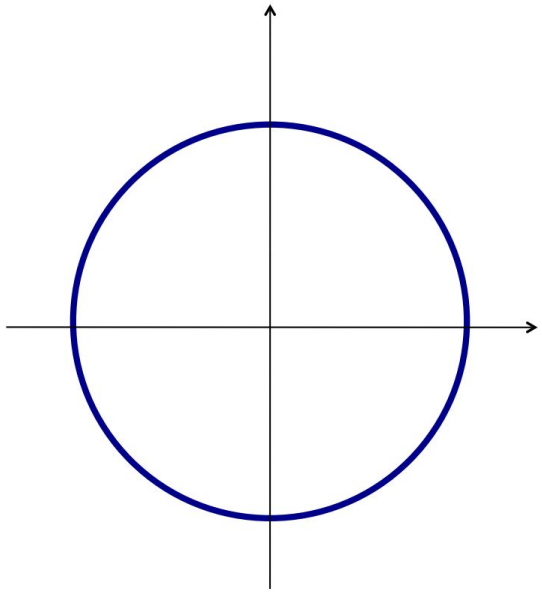

3D Representation

Parametric Representation : Parametric Surfaces

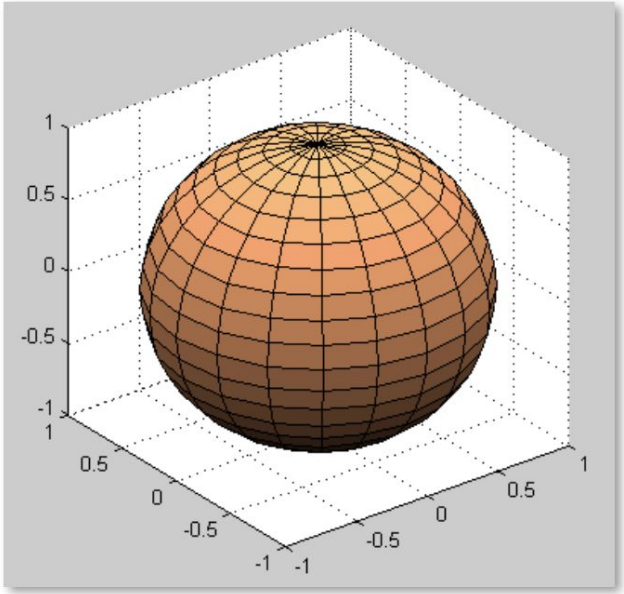

Sphere in 3D

$$s : \mathbb{R}^2 \to \mathbb{R}^3$$

$$s(u, v) = r\left(\cos(u)\cos(v), \sin(u)\cos(v), \sin(v)\right)$$

$$(u, v) \in [0, 2\pi) \times [-\pi/2, \pi/2]$$

3D Representation

Parametric Representation : Parametric Surfaces

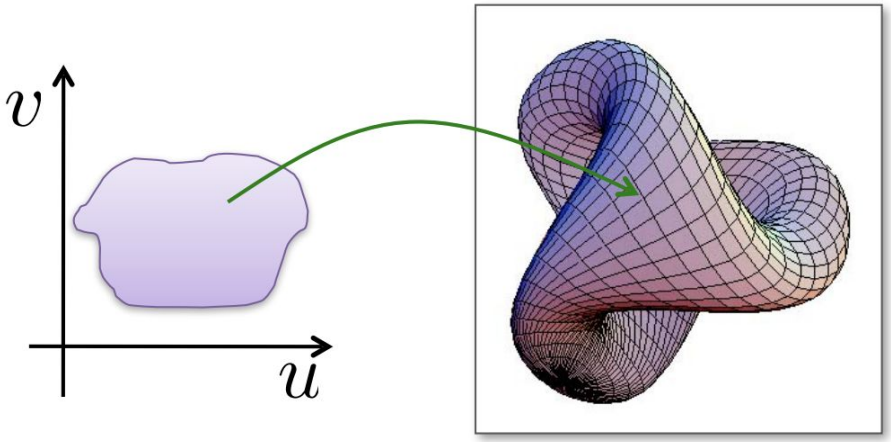

$$s(u,v) = (x(u,v), y(u,v), z(u,v))$$

Range of a function :

$$f : X \to Y, X \subseteq \mathbb{R}^m, Y \subseteq \mathbb{R}^n$$

Surface in 3D : $m = 2, n = 3$

A continuous function *f* over a 2D manifold *M* can parametrize a surface.

```
def f(u):
    '''
    Input:
        u: N-dimenstional vector from a 2D manifold
    Output:
        p: 3D point
    '''
```

Can be fixed analytics functions, parameterized family, or even a neural network!

3D Representation

Parametric Representation : Parametric Surfaces

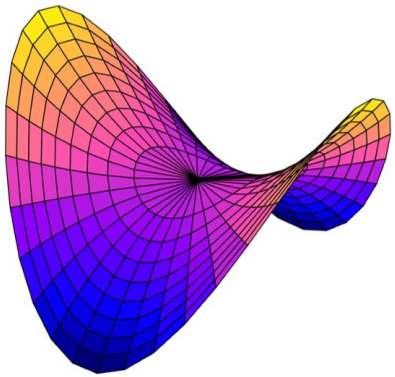

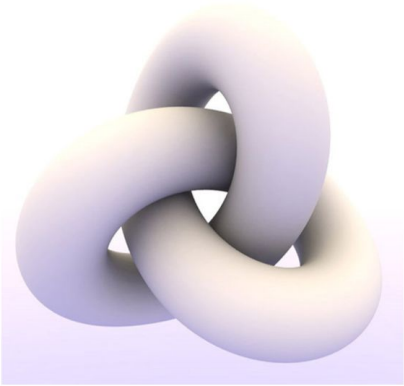

$$f((u,v)) = (u, v, v^2 - u^2)$$

```
def trefoil(u, v):
    x = r * np.sin(3 * u) / (2 + np.cos(v))
    y = r * (np.sin(u) + 2 * np.sin(2 * u)) / (2 + np.cos(v + np.pi * 2 / 3))
    z = r / 2 * (np.cos(u) - 2 * np.cos(2 * u)) * (2 + np.cos(v)) * (2 + np.cos(v + np.pi * 2 / 3)) / 4
```

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

3D Representation

Parametric Representation : Bezier Curves/Surfaces

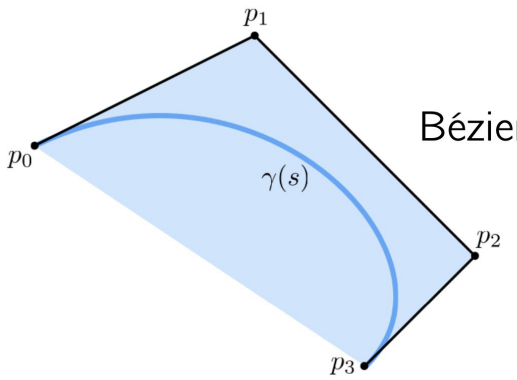

Bézier curves

Piecewise Bézier

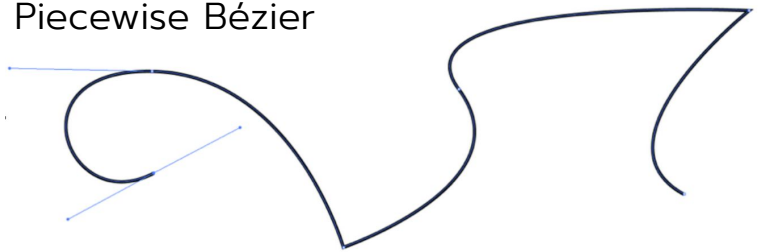

Use tensor product of Bézier curves to get a patch:

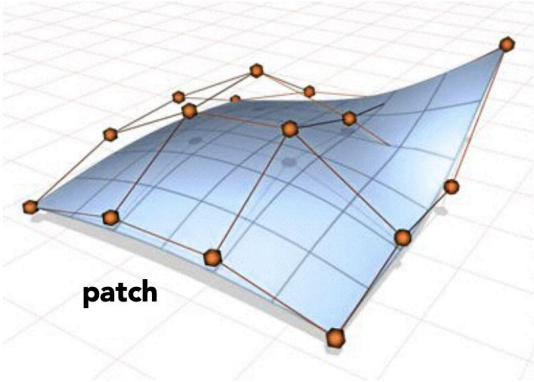

Multiple Bézier patches form a surface.

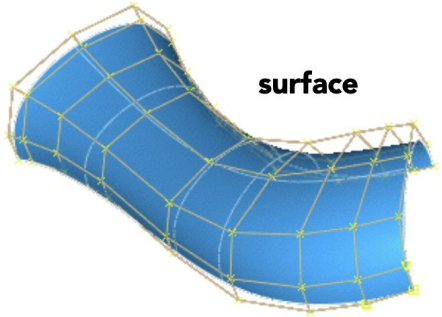

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

3D Representation

Many ways to represent geometry

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Cherdsak Kingkan

3D Representation

Explicit Representation of Geometry

All points are given directly.

Generally: $f : \mathbb{R}^2 \to \mathbb{R}^3; (u, v) \mapsto (x, y, z)$

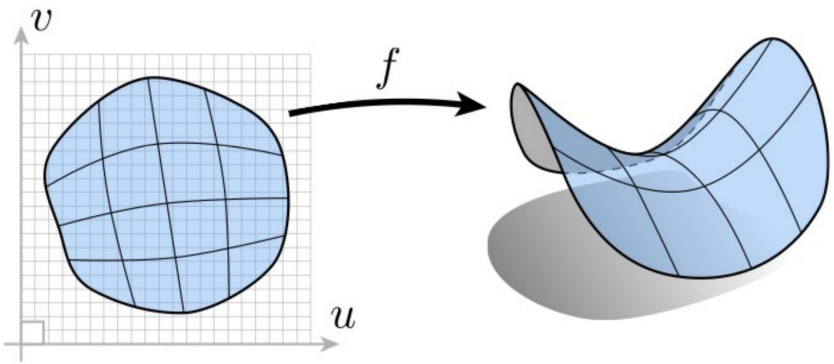

3D Representation

Explicit Representation of Geometry

Sampling is **Easy**.

$$f(u,v) = ((2+\cos u)\cos v, (2+\cos u)\sin v, \sin u)$$

What points lie on this surface?

Just plug in (u, v) values!

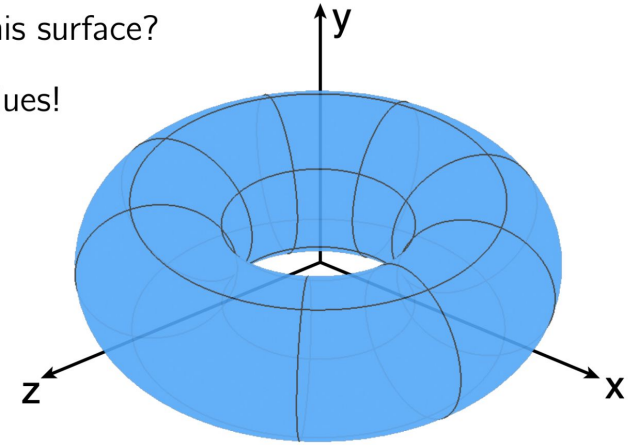

Explicit representations make some tasks easy.

Inside/Outside Test **Hard**.

$$f(u,v) = (\cos u\ \sin v, \sin u\ \sin v, \cos v)$$

Is $(3/4, 1/2, 1/4)$ inside?

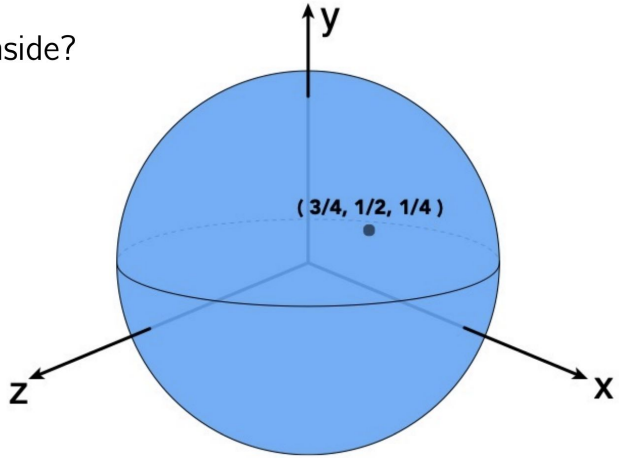

Some tasks are hard with explicit representations.

3D Representation

Many ways to represent geometry

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Cherdsak Kingkan

3D Representation

Implicit Representation of Geometry

Based on classifying points

- Points satisfy some specified relationship.

E.g., sphere: all points in 3D, where

$$x^2 + y^2 + z^2 = 1$$

More generally,

$$f(x, y, z) = 0$$

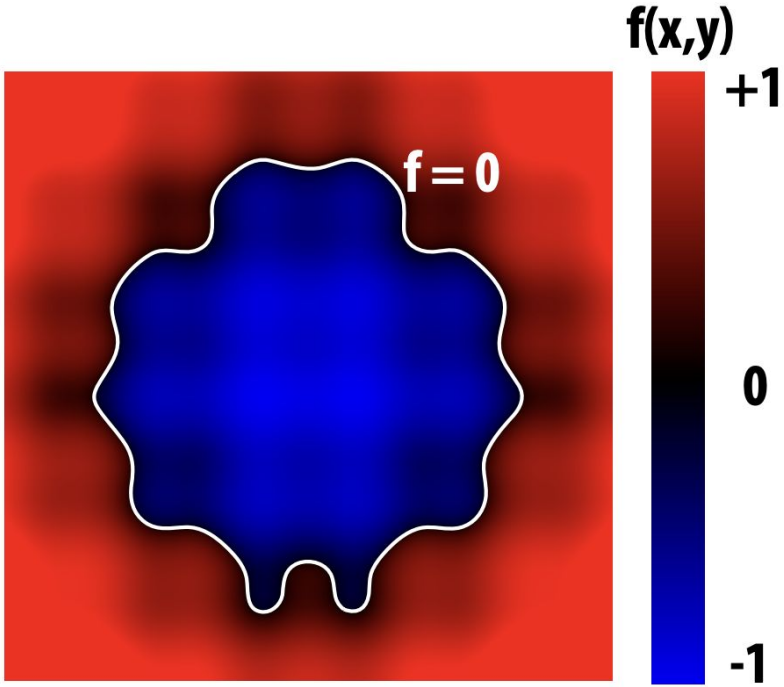

3D Representation

Implicit Representation of Geometry

Sampling can be **Hard**.

$$f(x,y,z) = (2 - \sqrt{x^2 + y^2})^2 + z^2 - 1$$

What points lie on $f(x,y,z) = 0$?

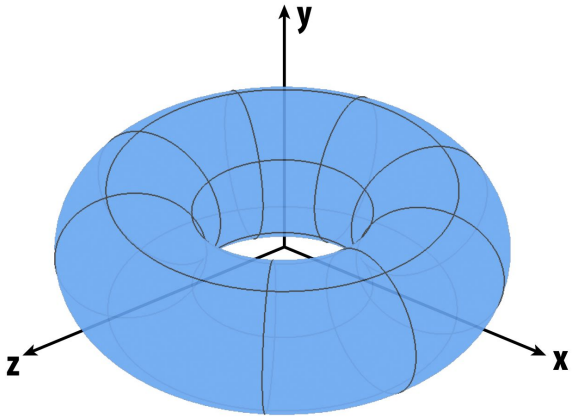

Some tasks are hard with implicit representations.

Inside/Outside Test **Easy**.

$$f(x,y,z) = x^2 + y^2 + z^2 - 1$$

Is (¾, ½, ¼) inside?

Just plug it in:

$$f(x,y,z) = -1/8 < 0$$

Yes, inside.

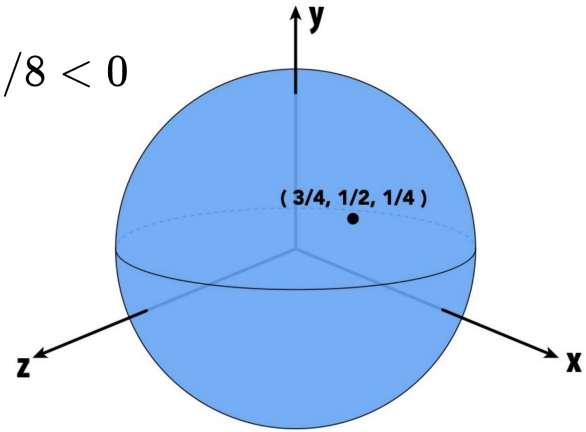

Implicit representations make **some tasks easy**.

3D Representation

Implicit Representation : Algebraic Surfaces

Surface is zero set of a polynomial in *x, y, z.*



$$x^2+y^2+z^2=1$$

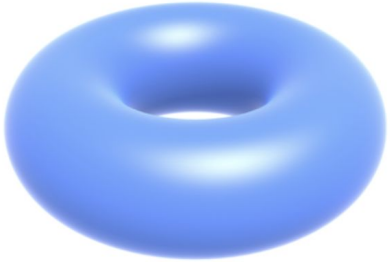

$$(R-\sqrt{x^2+y^2})^2+z^2=r^2$$



$$(x^2+\frac{9y^2}{4}+z^2-1)^3=x^2z^3+\frac{9y^2z^3}{80}$$

More complex shapes??

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Implicit Representation : Algebraic Surfaces

Combine implicit geometry via Boolean operations.

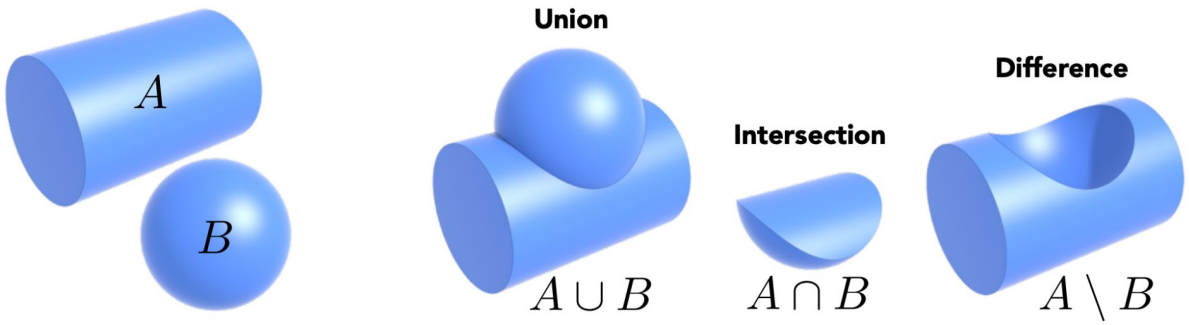

Boolean expressions:

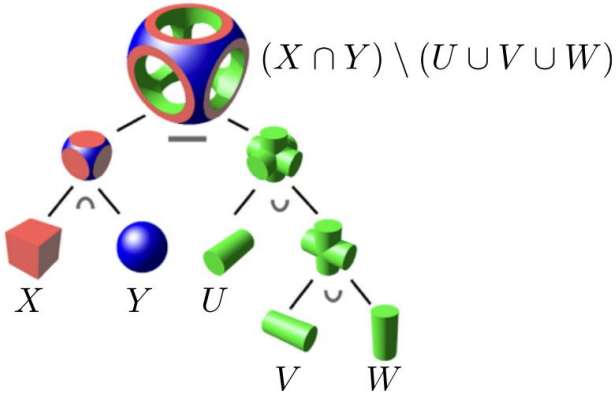

3D Representation

Implicit Representation : Signed Distance Function

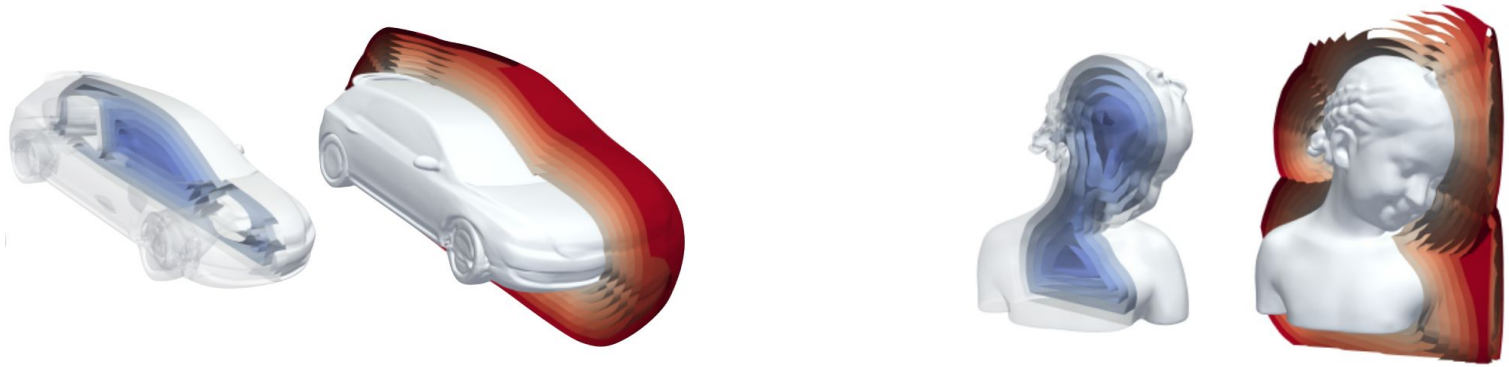

$$\{\mathbf{p} \mid f(\mathbf{p})\} = 0$$

Additional condition that ***f*** represents (signed) distance to surface from point ***p***

3D Representation

Many ways to represent geometry

Explicit

Implicit

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Cherdsak Kingkan

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Implicit Representation : Level Set Methods

$$f(\mathbf{x}) = 0$$

Implicit surfaces have some nice features (e.g., merging/splitting).

But hard to describe complex shapes in closed form.

Alternative: store a grid of values approximating function.

Surface is found where interpolated values equal zero. Provides much more explicit control over shape (like a texture).

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Implicit Representation : Level Set Methods

Level Sets from Medical Data (CT, MRI, etc.)

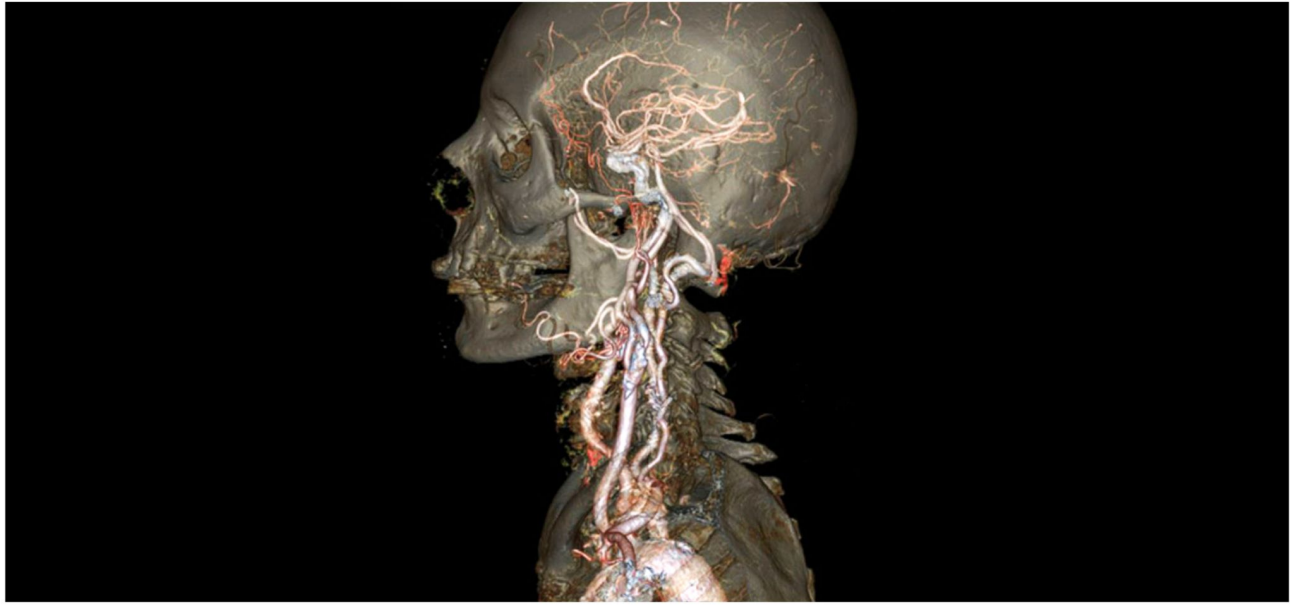

Level sets encode, e.g., constant tissue density

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Implicit Representation : Voxels

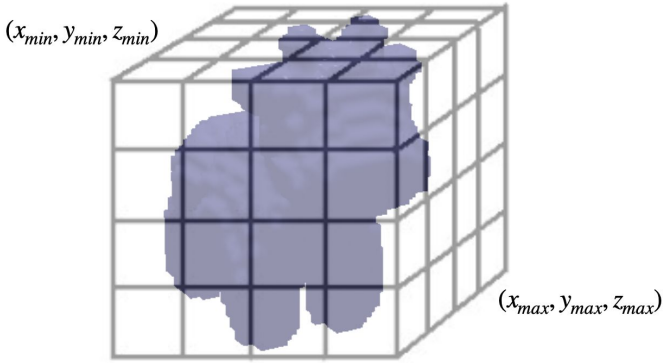

$$V[x, y, z] \in [0,1]$$

Discretized representation of the space demarcated via cuboid endpoints

A (W X H X D) grid representing occupancy (or probability) at each cell





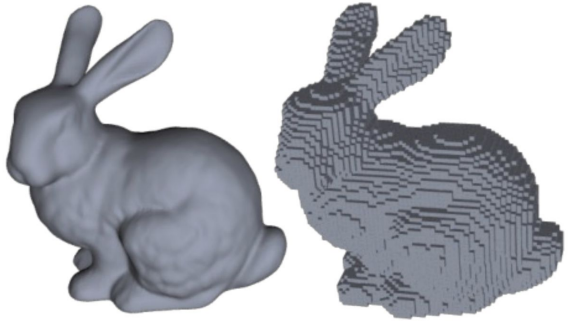

3D Representation

Implicit Representation : Voxels

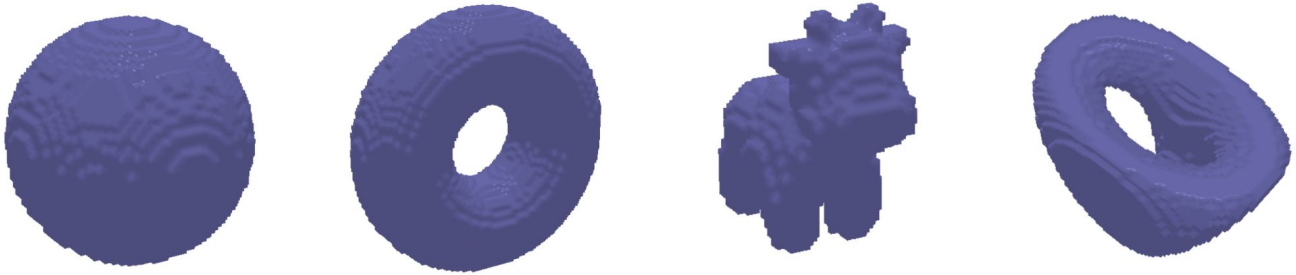

A generic way for representing shapes across topologies

Computationally challenging to scale resolution

32^3 64^3 128^3 256^3 mesh

3D Representation

Many ways to represent geometry

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Cherdsak Kingkan

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Representation

Surface vs. Volume Representations

Surface Representation





Volume Representation

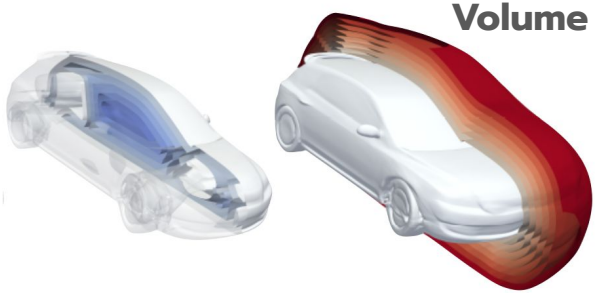

Adopted from: Shubham Tulsiani, Learning for 3D Vision, Fall 2025
Carnegie Mellon University

Point Cloud

Processing

Point Cloud Processing

How point cloud is generated

Point Cloud Processing

How point cloud is generated

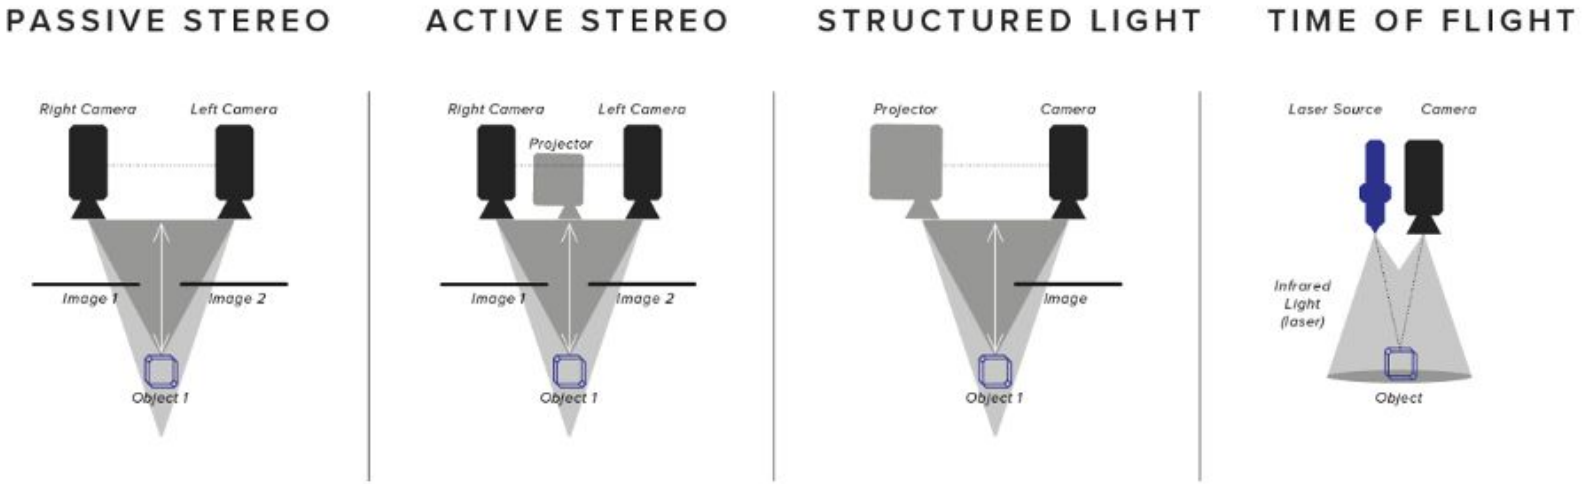

Point Cloud Processing

How point cloud is generated

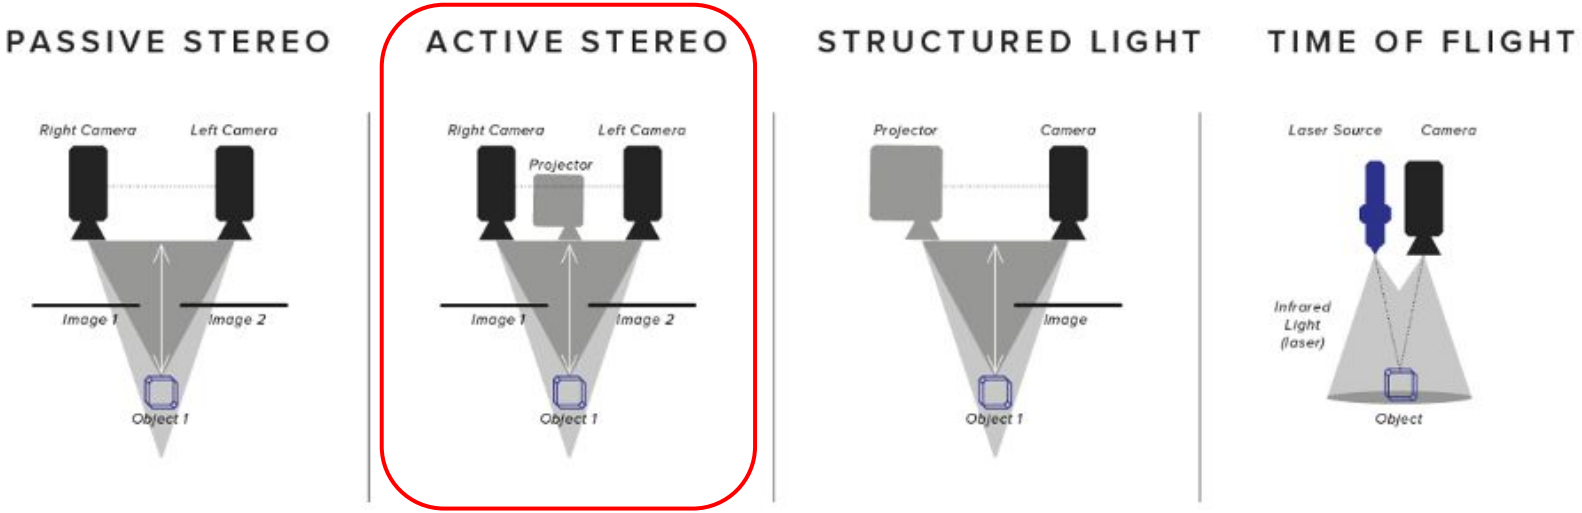

intel REALSENSE™

Point Cloud Processing

How point cloud is generated

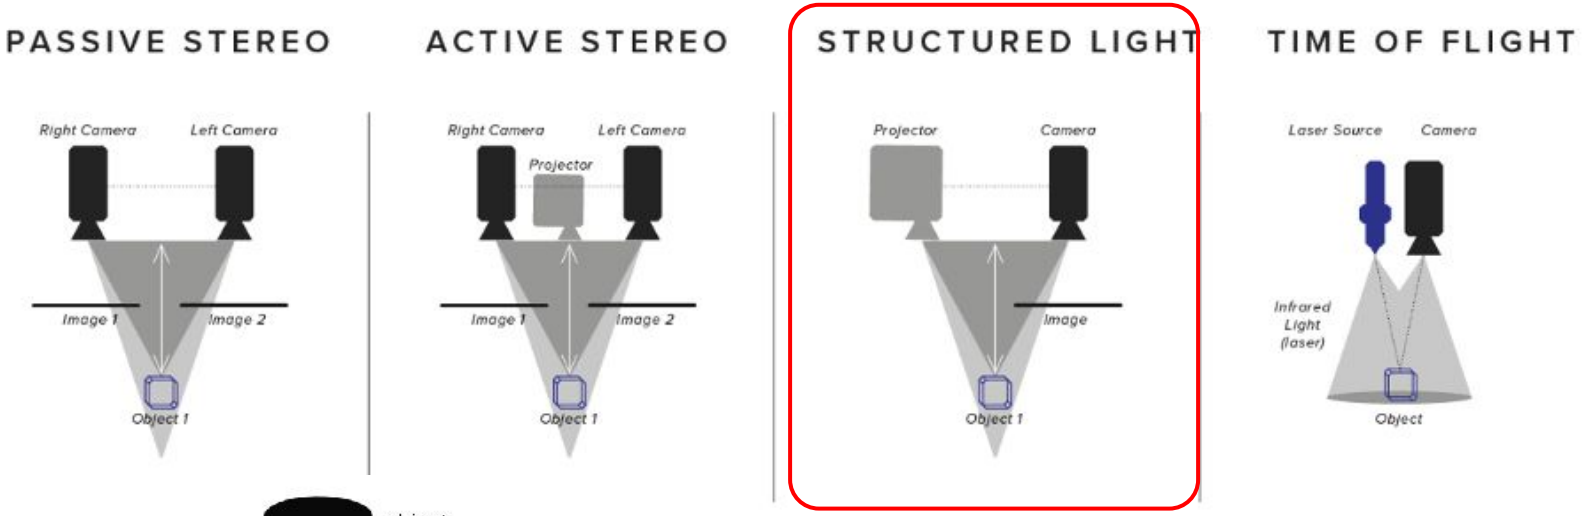

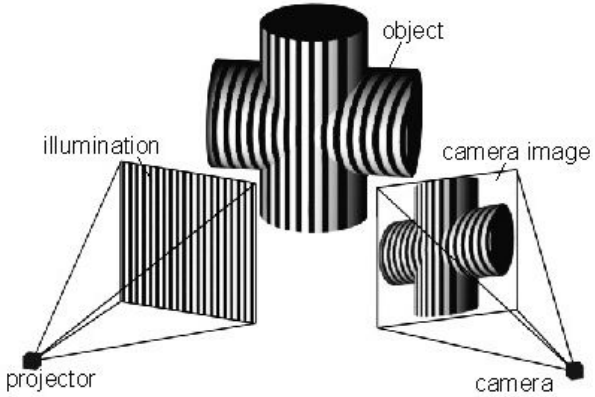

Point Cloud Processing

How point cloud is generated

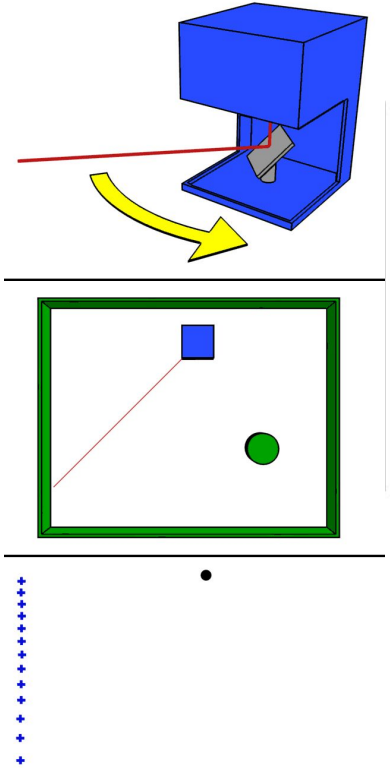

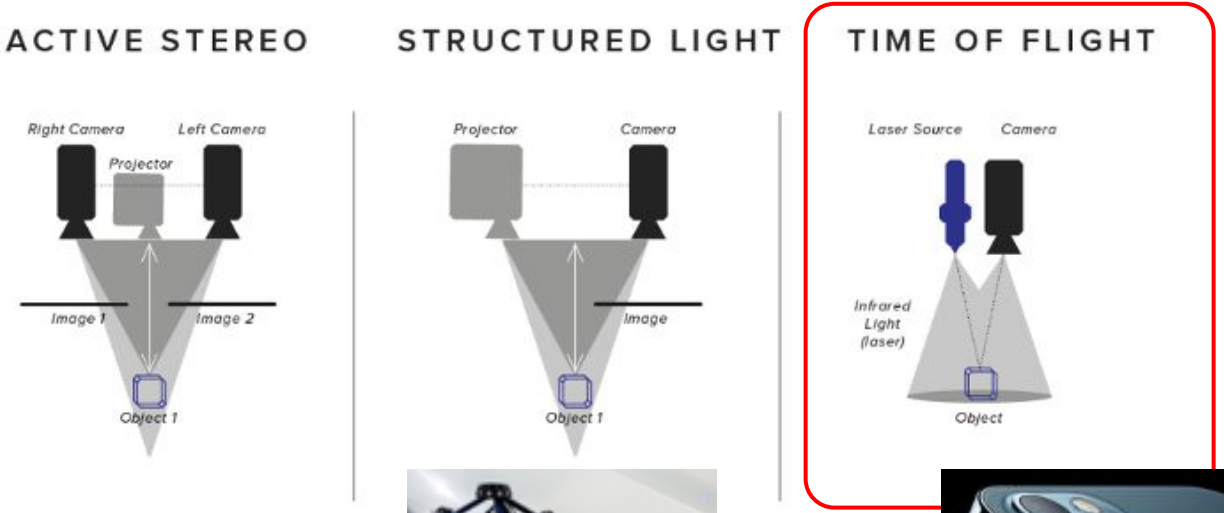



Point Cloud Processing

What format is point cloud stored?

.PCD

```
# .PCD v.7 - Point Cloud Data file format
VERSION .7
FIELDS x y z rgb
SIZE 4 4 4 4
TYPE F F F F
COUNT 1 1 1 1
WIDTH 213
HEIGHT 1
VIEWPOINT 0 0 0 1 0 0 0
POINTS 213
DATA ascii
0.93773 0.33763 0 4.2108e+06
0.90805 0.35641 0 4.2108e+06
0.81915 0.32 0 4.2108e+06
0.97192 0.278 0 4.2108e+06
0.944 0.29474 0 4.2108e+06
0.98111 0.24247 0 4.2108e+06
0.93655 0.26143 0 4.2108e+06
0.91631 0.27442 0 4.2108e+06
0.81921 0.29315 0 4.2108e+06
0.90701 0.24109 0 4.2108e+06
0.83239 0.23398 0 4.2108e+06
0.99185 0.2116 0 4.2108e+06
0.89264 0.21174 0 4.2108e+06
0.85082 0.21212 0 4.2108e+06
0.81044 0.32222 0 4.2108e+06
0.74459 0.32192 0 4.2108e+06
0.69927 0.32278 0 4.2108e+06
0.8102 0.29315 0 4.2108e+06
0.75504 0.29765 0 4.2108e+06
0.8102 0.24399 0 4.2108e+06
```

.PLY

```
ply
format ascii 1.0
comment author: Greg Turk
comment object: another cube
element vertex 8
property float x
property float y
property float z
property uchar red
property uchar green
property uchar blue
element face 7
property list uchar int vertex_inc
element edge 5
property int vertex1
property int vertex2
property uchar red
property uchar green
property uchar blue
end_header
0 0 0 255 0 0
0 0 1 255 0 0
0 1 1 255 0 0
0 1 0 255 0 0
1 0 0 0 0 255
1 0 1 0 0 255
1 1 1 0 0 255
1 1 0 0 0 255
3 0 1 2
3 0 2 3
4 7 6 5 4
4 0 4 5 1
4 1 5 6 2
4 2 6 7 3
4 3 7 4 0
0 1 255 255 255
1 2 255 255 255
2 3 255 255 255
3 0 255 255 255
2 0 0 0 0
```

Point Cloud Processing

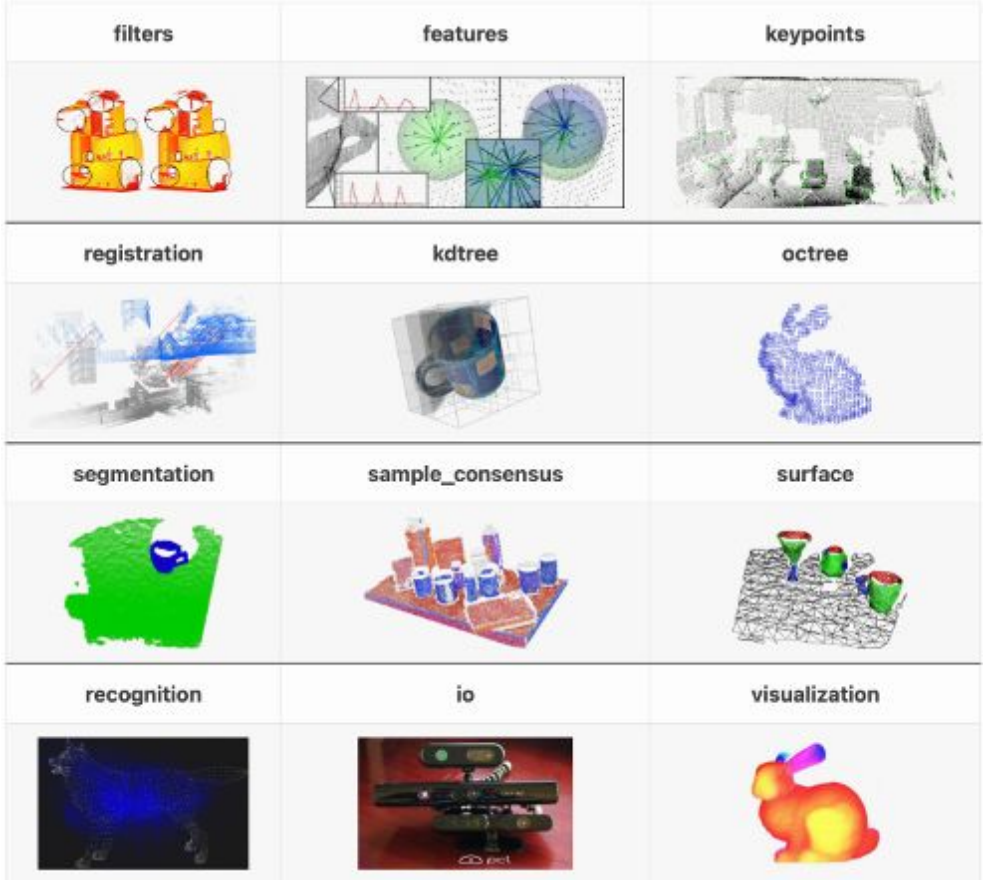

Image from: www.pointcloud.org

Point Cloud Processing

Registration



Point Cloud Processing

Registration

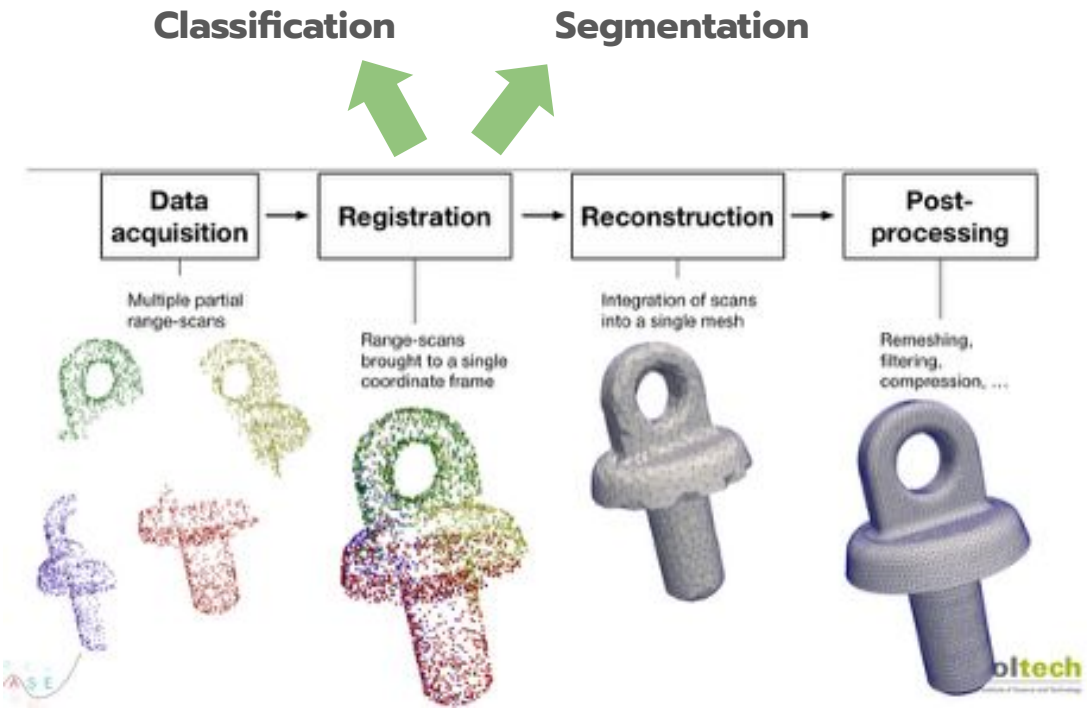

Point Cloud Processing

Registration

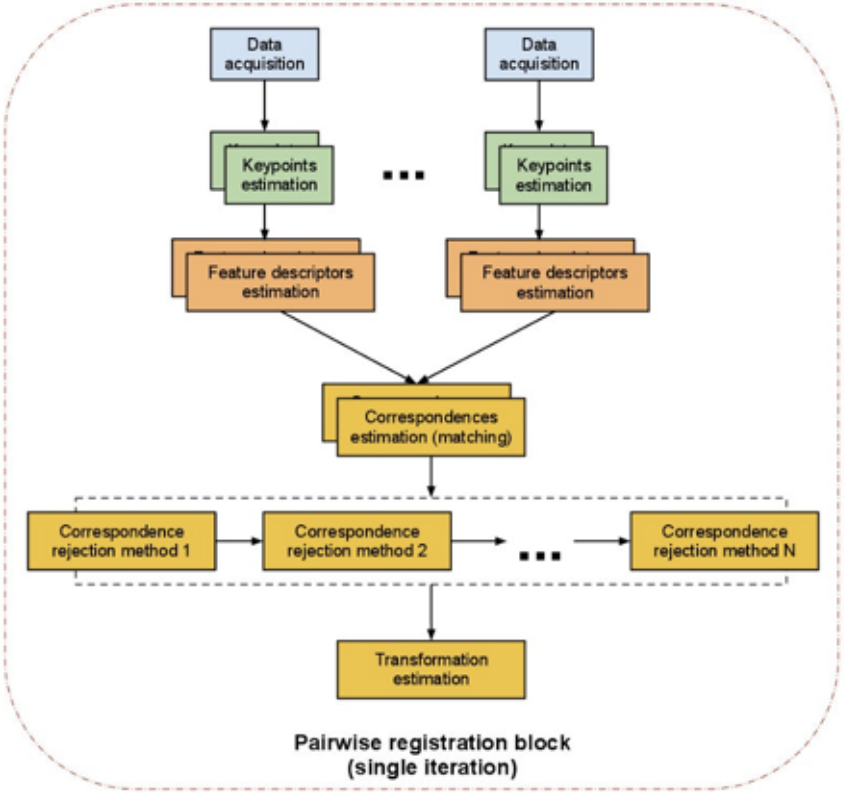

Image from: www.pointcloud.org

Point Cloud Processing

Registration - Keypoints

Good Keypoints

- Repeatability
- Distinctiveness

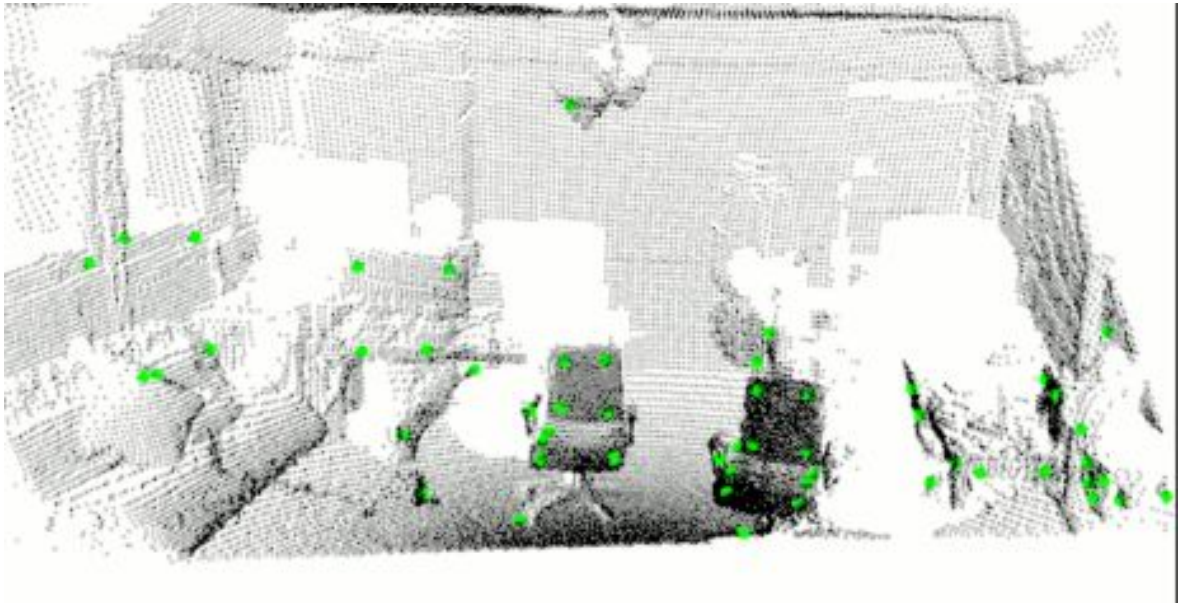

Image from:
https://robotica.unileon.es/index.php?title=PCL/OpenNI_tutorial_4:_3D_object_recognition_(descriptors)#NARF

Point Cloud Processing

Registration - Keypoints

NARF- Normal Aligned Radial Feature

NARF keypoints are located near an object's corners

- Contains information about border and surface structure.
- Be reliably detected regardless to perspective.
- Suitable area for normal estimation

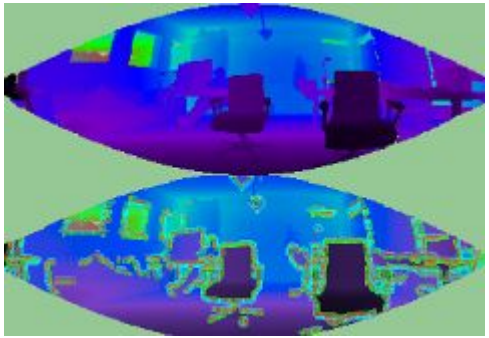

Extracting border

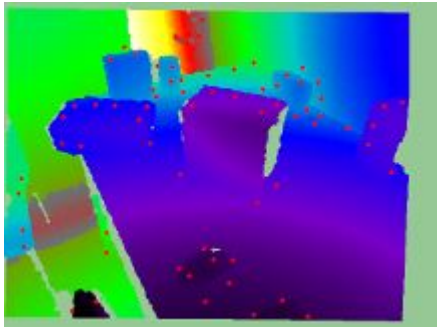

Keypoints

Image from: https://robotica.unileon.es/index.php?title=PCL/OpenNI_tutorial_4:_3D_object_recognition_(descriptors)#NARF

Point Cloud Processing

Registration - Keypoints

Normal Estimation

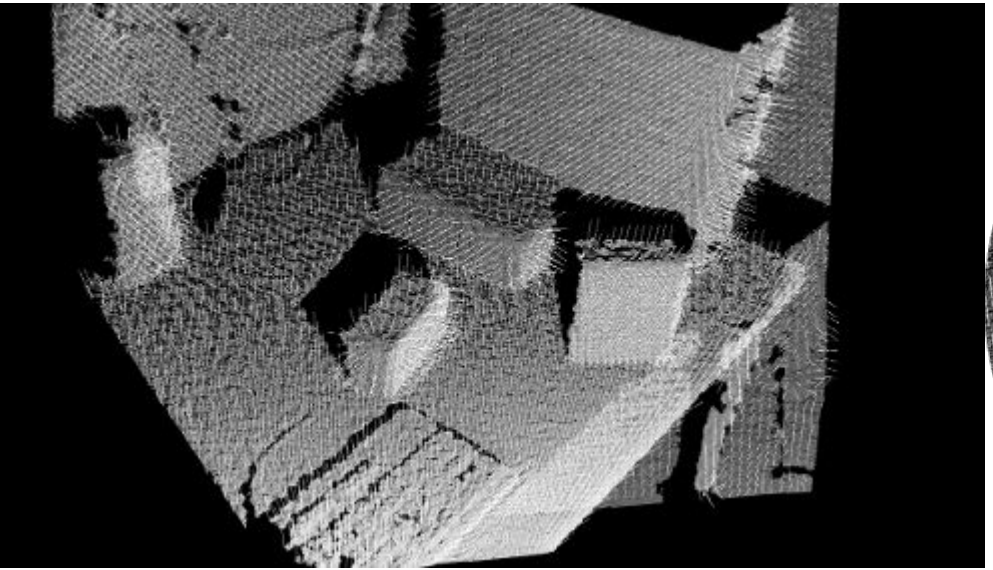

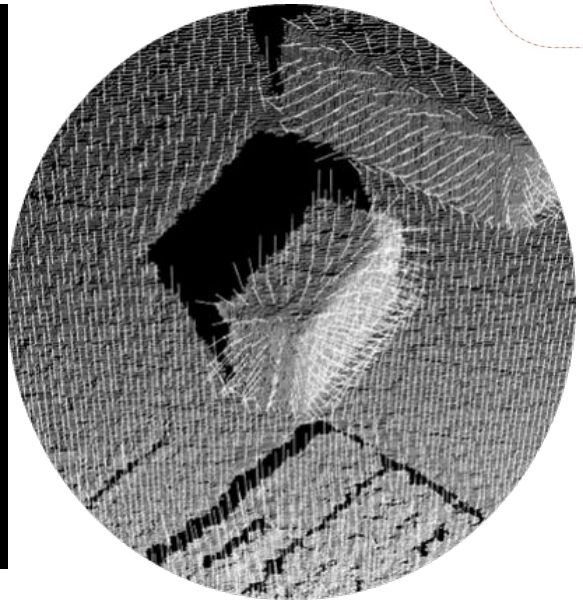

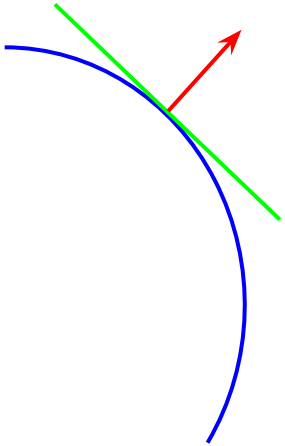

Image from:
https://robotica.unileon.es/index.php?title=PCL/OpenNI_tutorial_4:_3D_object_recognition_(descriptors)#NARF

Point Cloud Processing

Registration - Feature Descriptors

Name	Type
PFH (Point Feature Histogram)	Local
FPFH (Fast Point Feature Histogram)	Local
RSD (Radius-Based Surface Descriptor)	Local
3DSC (3D Shape Context)	Local
USC (Unique Shape Context)	Local
SHOT (Signatures of Histograms of Orientations)	Local
Spin image	Local
RIFT (Rotation-Invariant Feature Transform)	Local
NARF (Normal Aligned Radial Feature)	Local
RoPS (Rotational Projection Statistics)	Local
VFH (Viewpoint Feature Histogram)	Global
CVFH (Clustered Viewpoint Feature Histogram)	Global
OUR-CVFH (Oriented, Unique and Repeatable Clustered Viewpoint Feature Histogram)	Global
ESF (Ensemble of Shape Functions)	Global
GFPFH (Global Fast Point Feature Histogram)	Global
GRSD (Global Radius-Based Surface Descriptor)	Global

Feature Descriptors

- Signatures of points
- Encode or describe a lot of information about the surrounding geometry.

Good Descriptors

- Robust to transformation
- Robust to noise
- Resolution invariant

Image from: https://robotica.unileon.es/index.php?title=PCL/OpenNI_tutorial_4:_3D_object_recognition_(descriptors)

Point Cloud Processing

Registration - Feature Descriptors

Local - PFH

To capture information of the geometry surrounding the point by analyzing the difference between the directions of the normals in the vicinity



$$u = n_i \qquad v = u \times \frac{(p_j - p_i)}{||p_j - p_i||_2} \qquad w = u \times v$$

$$\alpha = v \cdot n_j \qquad \phi = u \cdot \frac{(p_j - p_i)}{d} \qquad \theta = \arctan(w \cdot n_j, u \cdot n_j)$$

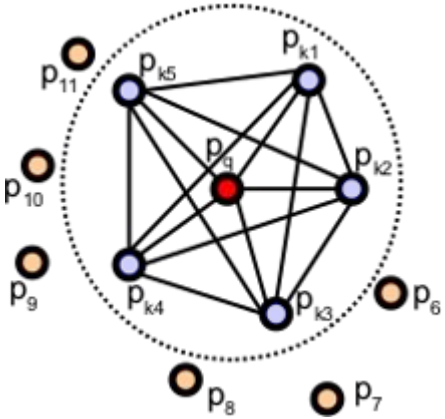

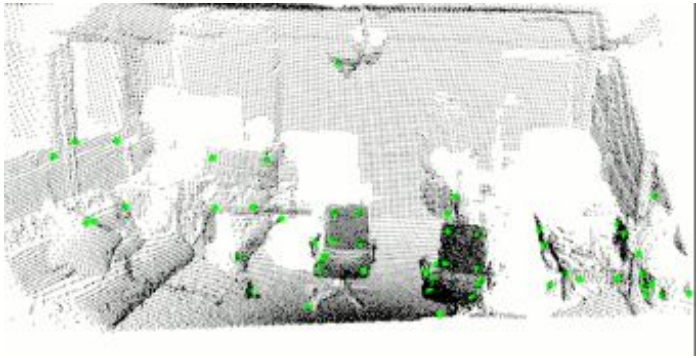

Image from: www.pointcloud.org

Point Cloud Processing

Registration - Feature Descriptors

Global - VFH

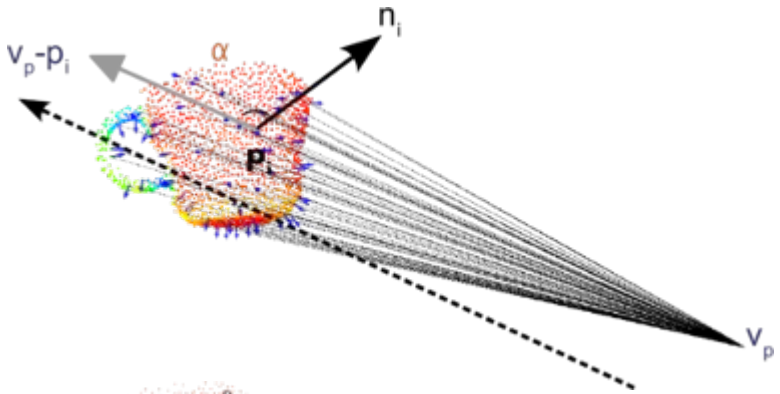

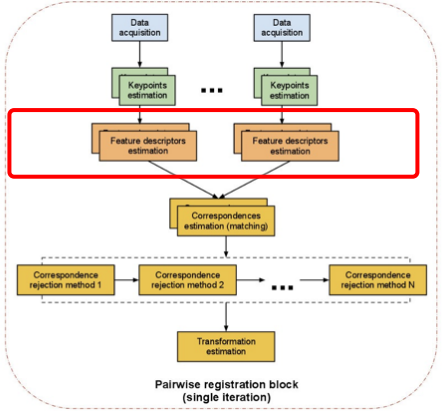

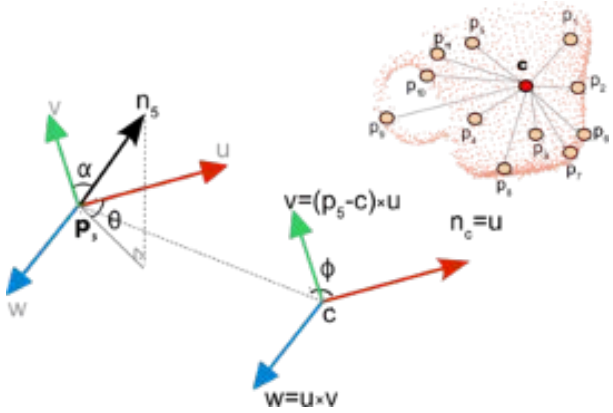

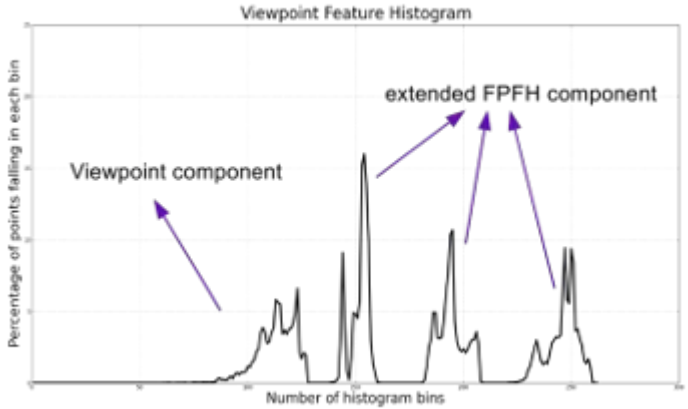

Image from: www.pointcloud.org

Point Cloud Processing

Registration - Correspondences Estimation

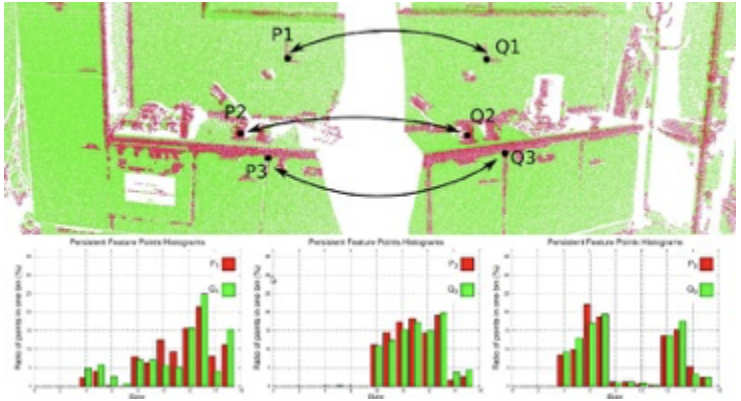

Point Matching

Using point coordinates as features

- brute force matching,
- kd-tree nearest neighbor search (FLANN),
- searching in the image space of organized data, and
- searching in the index space of organized data.

Feature Matching

- brute force matching and
- kd-tree nearest neighbor search (FLANN).

Image from: www.pointcloud.org

Point Cloud Processing

Registration - Correspondences Rejection

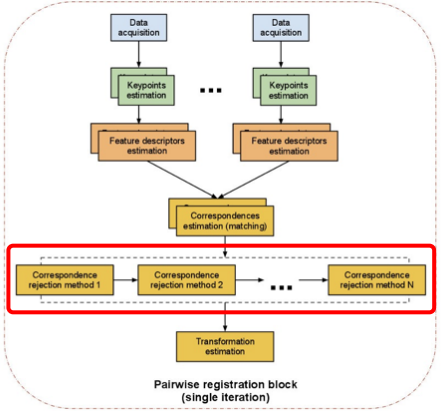

RANSAC – Random Sample Consensus

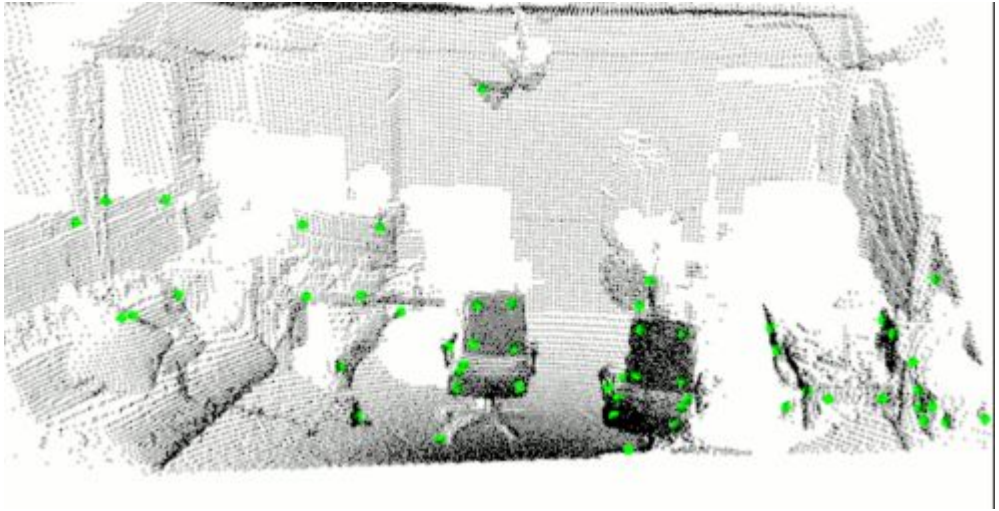

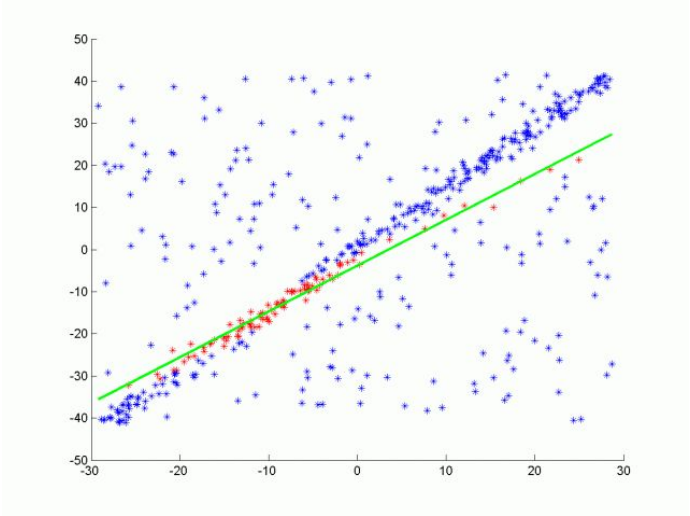

Image from: www.pointcloud.org

Point Cloud Processing

Registration - Transformation Estimation

RANSAC – Random Sample Consensus

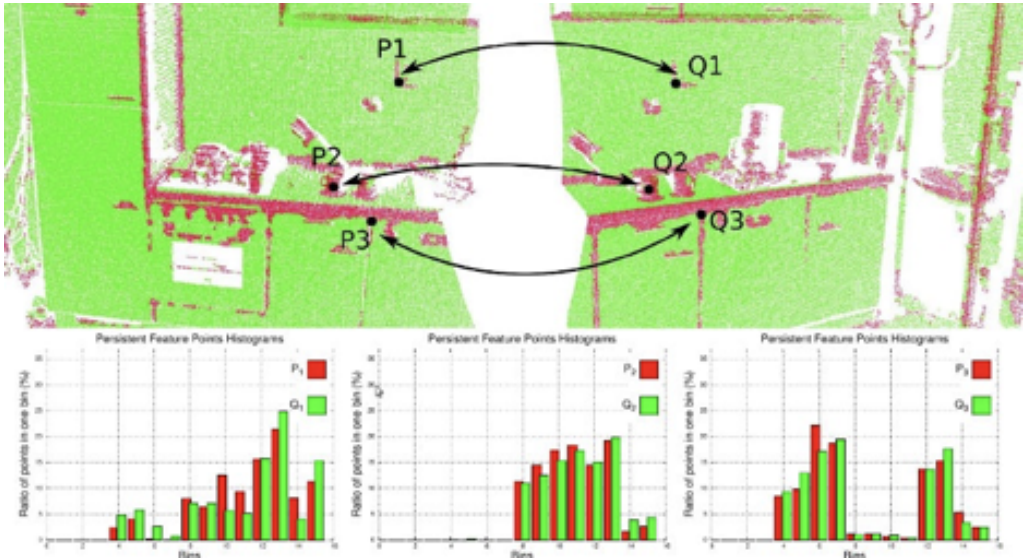

$$\begin{array}{cccc} \text{x-axis} & \text{y-axis} & \text{z-axis} & \text{translation} \\ \downarrow & \downarrow & \downarrow & \downarrow \end{array}$$

$$\begin{bmatrix} m_1 & m_5 & m_9 & m_{13} \\ m_2 & m_6 & m_{10} & m_{14} \\ m_3 & m_7 & m_{11} & m_{15} \\ m_4 & m_8 & m_{12} & m_{16} \end{bmatrix}$$

$$\uparrow$$

Homogeneous coordinate

Image from: www.pointcloud.org

Point Cloud Processing

Registration - Applications

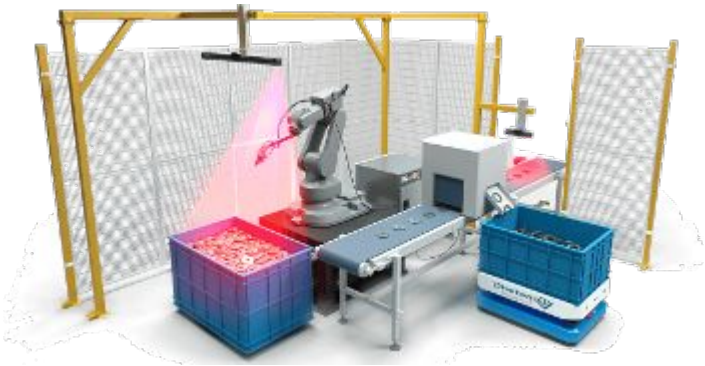

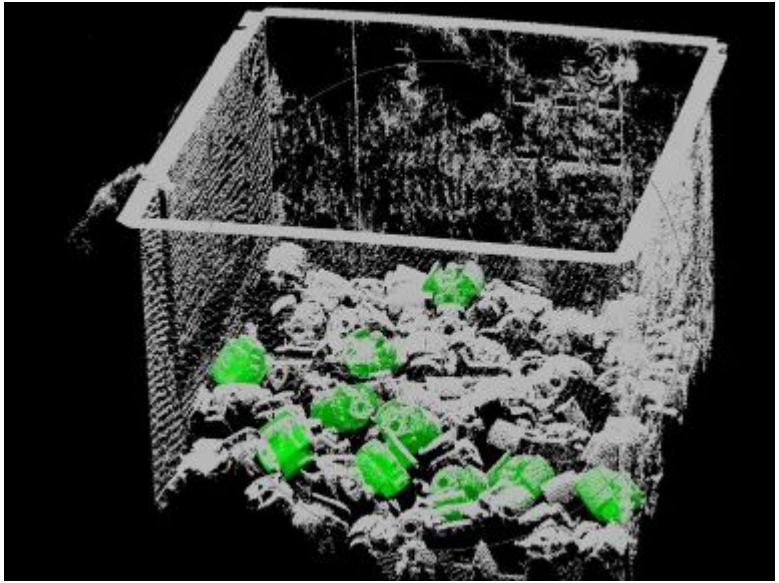

Point Cloud Processing

Applications

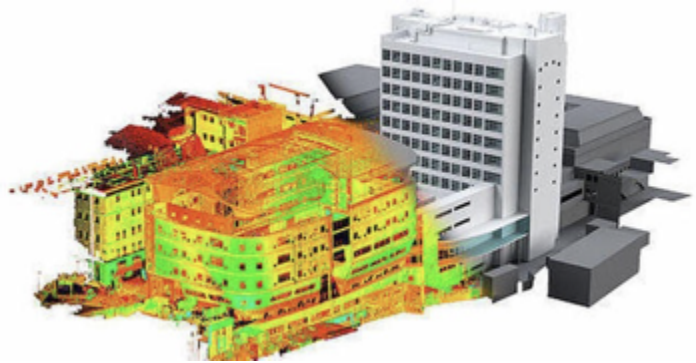

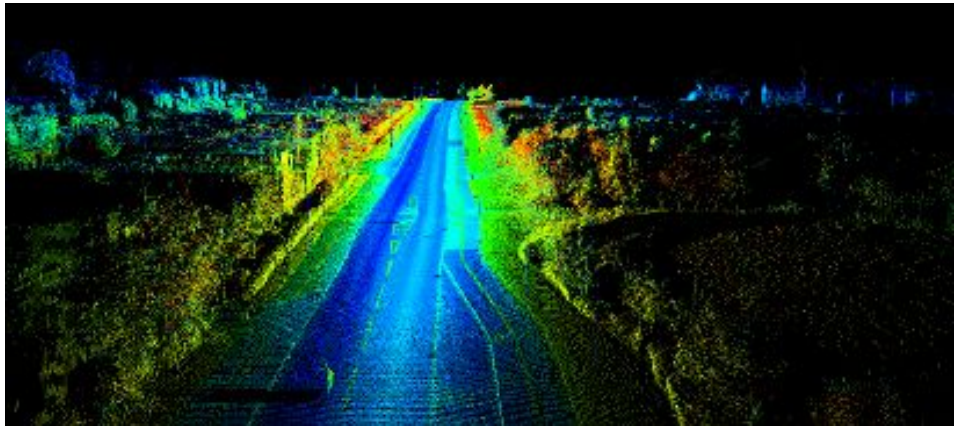

3D Deep Learning

Datasets

Princeton Shape Benchmark (2003)

- 1814 Models
- 182 Categories

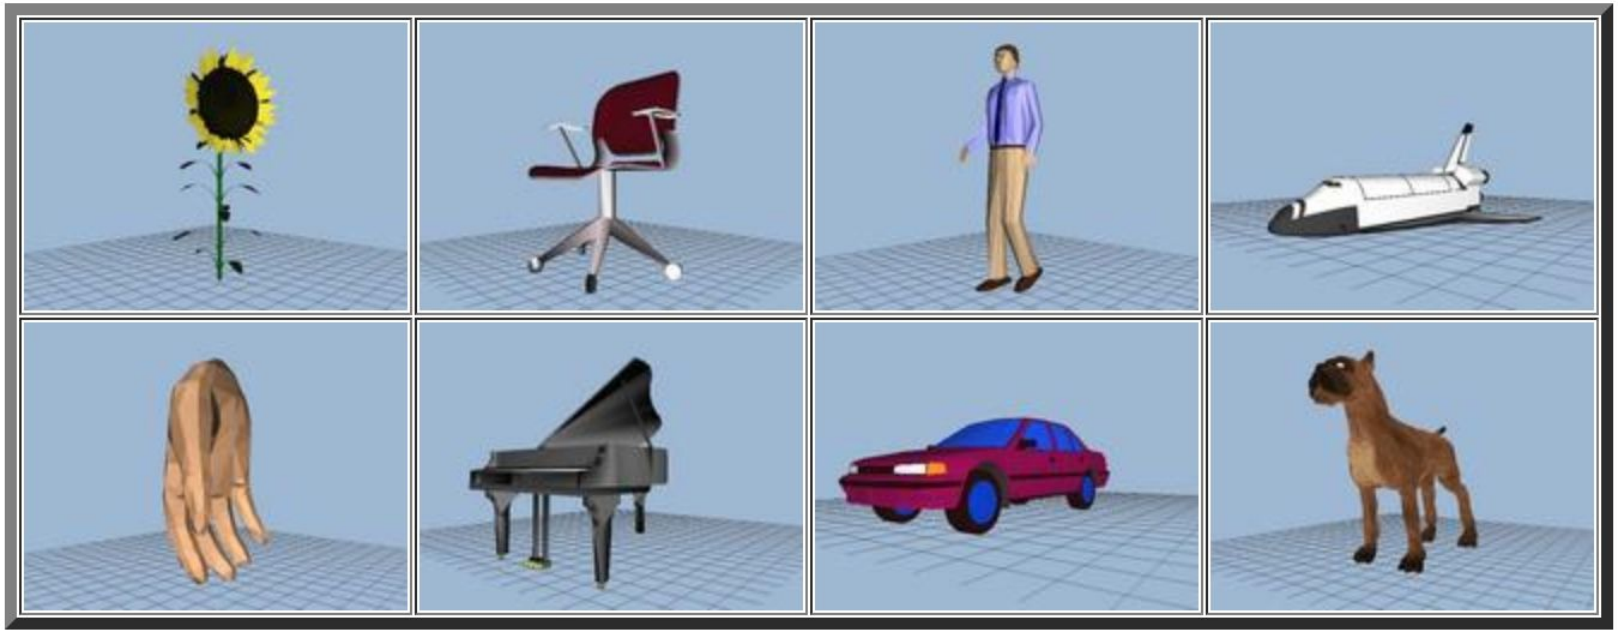

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

Prior to 2014

Benchmarks	Types	# models	# classes	Avg # models per class
SHREC14LSGTB	Generic	8,987	171	53
PSB	Generic	907+907 (train+test)	90+92 (train+test)	10+10 (train+test)
SHREC12GTB	Generic	1200	60	20
TSB	Generic	10,000	352	28
CCCC	Generic	473	55	9
WMB	Watertight (articulated)	400	20	20
MSB	Articulated	457	19	24
BAB	Architecture	2257	183+180 (function+form)	12+13 (function+form)
ESB	CAD	867	45	19

Table 1. Source datasets from SHREC 2014: *Princeton Shape Benchmark (PSB)* [27], *SHREC 2012 generic Shape Benchmark (SHREC12GTB)* [16], *Toyohashi Shape Benchmark (TSB)* [29], *Konstanz 3D Model Benchmark (CCCC)* [32], *Watertight Model Benchmark (WMB)* [31], *McGill 3D Shape Benchmark (MSB)* [37], *Bonn Architecture Benchmark (BAB)* [33], *Purdue Engineering Shape Benchmark (ESB)* [9].

Datasets

Large-scale Synthetic Object Datasets

- 127,915 3D CAD models from 662 categories
- ModelNet10: 4,899 models from 10 categories
- ModelNet40: 1,2311 models from 40 categories, all are uniformly orientated

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

Large-scale Synthetic Object Datasets

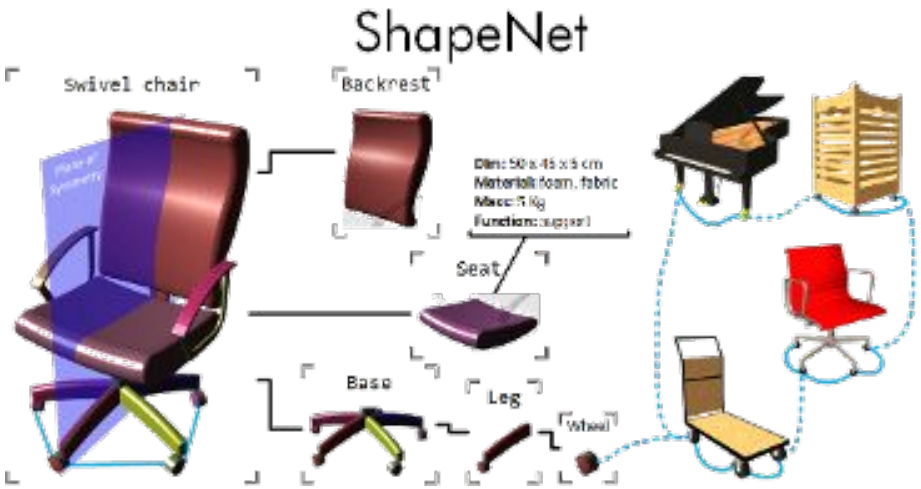

- 3 Million+ models and 4K+ categories.
- A dataset that is large in scale, well organized and richly annotated
- ShapeNetCore: 51,300 models for 55 categories.

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

Large-scale Synthetic Object Datasets

ABC Dataset: A Big CAD Model Dataset For Geometric Deep Learning

- a collection of **one million** Computer-Aided Design (CAD) models for research of geometric deep learning methods and applications.
- Each model is a collection of explicitly parametrized curves and surfaces, providing ground truth for
  - differential quantities,
  - patch segmentation,
  - geometric feature detection,
  - shape reconstruction.

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

Objverse (800K) and Objverse-XL (10M)

- Matt Deitke et al., Objaverse-XL: A Universe of 10M+ 3D Objects, 2023
- Matt Deitke et al., Objaverse: A Universe of Annotated 3D Objects, 2022

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

ScanNN & ScanNet for indoor scenes

SceneNN (2016)

- 100+ indoor scene meshes with per-vertex and per-pixel annotation.

ScanNet (2017)

- An RGB-D video dataset containing 2.5 million views in more than 1500 scans, annotated with 3D camera poses, surface reconstructions, and instance-level semantic segmentations.

Datasets

A Large Dataset of Object Scans (2016)

- 10K scans in RGBD + reconstructed 3D models in .PLY format.

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

CO3D: Common Objects in 3D: Large-Scale Learning and Evaluation of Real-life 3D Category Reconstruction

- Videos: 18,619
- Categories: 50 MS-COCO
- Camera-annotated frames: 1.5 million
- Point-cloud-annotated videos: 5,625

Source from: https://ai.meta.com/datasets/co3d-dataset/, https://github.com/facebookresearch/co3d/tree/main

Datasets

3D Object Parts

Fine-grained Parts: PartNet

- Fine-grained (+mobility)
- Instance-level
- Hierarchical

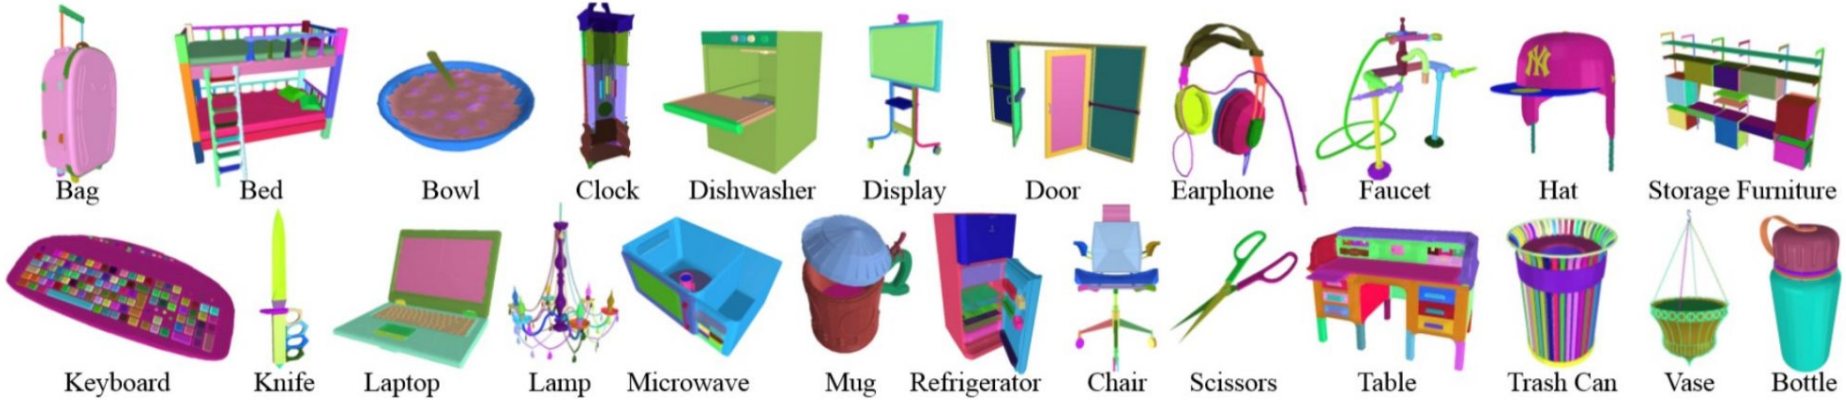

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Datasets

Point Cloud Datasets

Semantic3D

Large-Scale Point Cloud Classification Benchmark, which provides a large labelled 3D point cloud data set of natural scenes with over **4 billion points** in total, and also covers a range of diverse urban scenes.

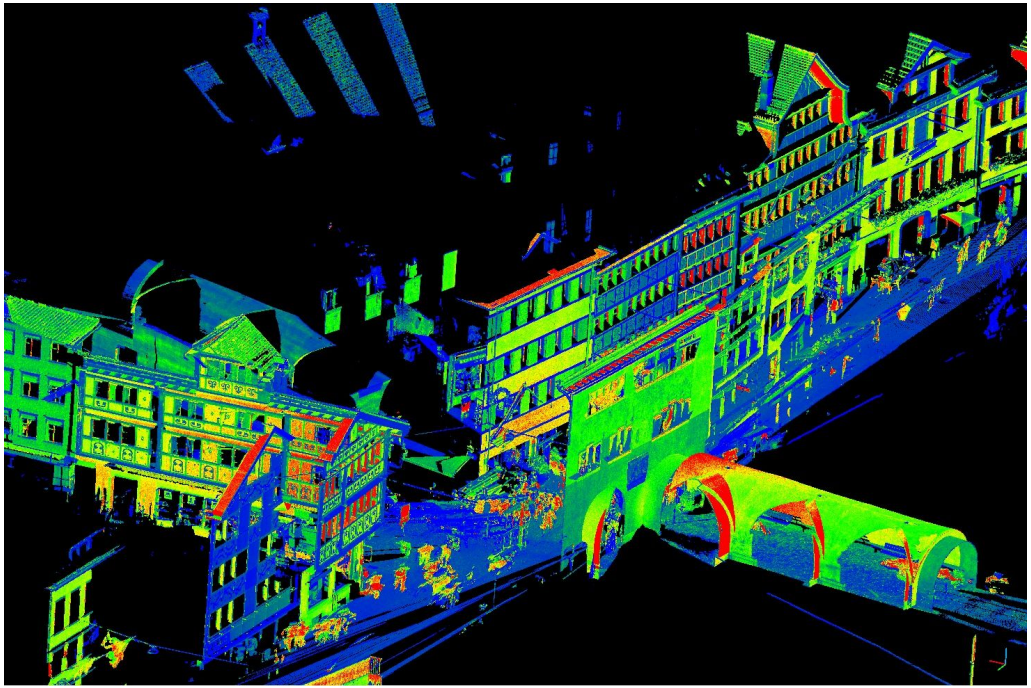

Datasets

Point Cloud Datasets

KITTI: LiDar data, labeled by 3D bounding box

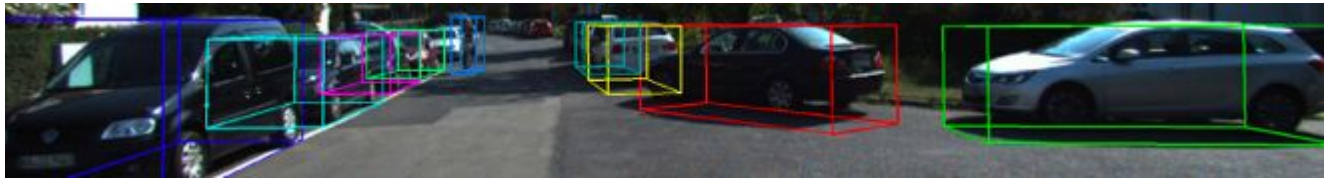

Semantic KITTI: LiDar data, labeled per point

Waymo Open Dataset: LiDar data, labeled by 3D bounding box

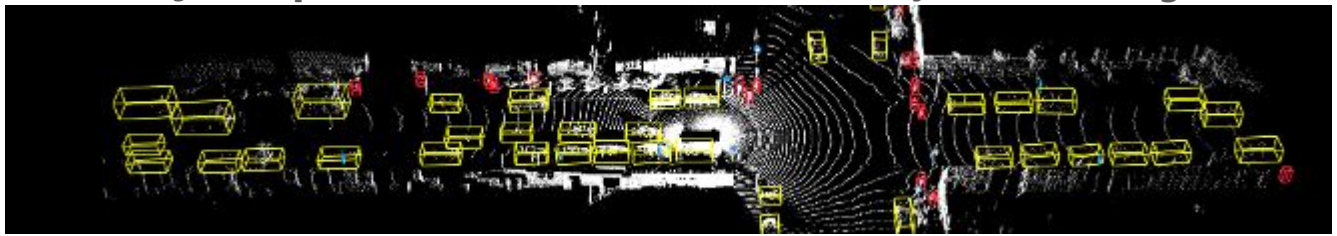

Tools

TensorFlow Graphics

Jraph - library for graph neural networks in jax

PyTorch3D

A LIBRARY FOR DEEP LEARNING WITH 3D DATA

Open3D

A Modern Library for 3D Data Processing

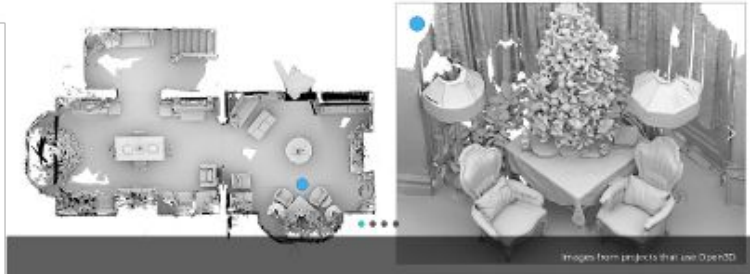

PyTorch geometric

trimesh

DGL DEEP GRAPH LIBRARY

AI + Geometry

Tasks

***P(S)* or *P(S|c)* --- Generative models**

- Learning (conditional) shape priors
- Shape generation, completion, & geometry data processing

***P(c|S)* --- Discriminative models**

- Learning shape descriptors
- Shape classification, segmentation, view estimation, etc.

Joint modeling of 3D and 2D data

- Large-scale 2D datasets & very good pretrained models
- Differentiable projection/back-projection & differentiable/neural rendering

Joint modeling of multi-modal data beyond visual (e.g., text)

AI + Geometry

Which representation ?

Explicit | **Implicit**

Non-parametric



Points



Meshes

Voxels



Level Sets

Parametric



Splines



Subdivision Surfaces

$x^2+y^2+z^2=1$

Algebraic Surfaces



Constructive Solid Geometry

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

Cherdsak Kingkan

3D Deep Learning

Image-based: Multi-view CNN

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Image-based: Multi-view CNN

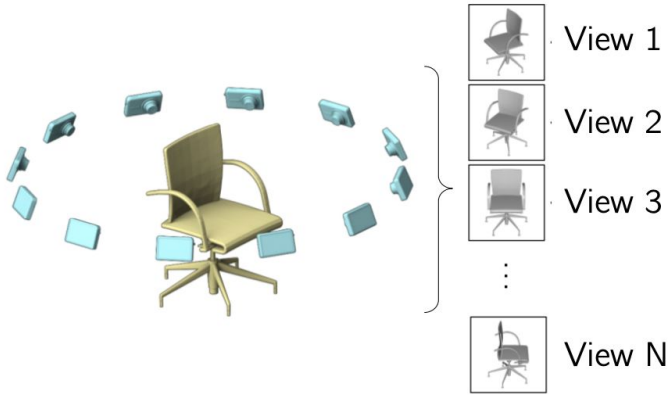

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Image-based: Multi-view CNN

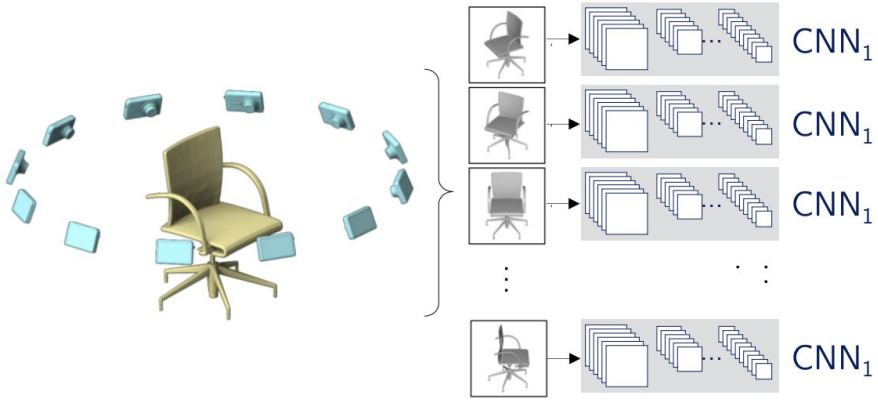

CNN$_1$: a ConvNet extracting image features

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Image-based: Multi-view CNN

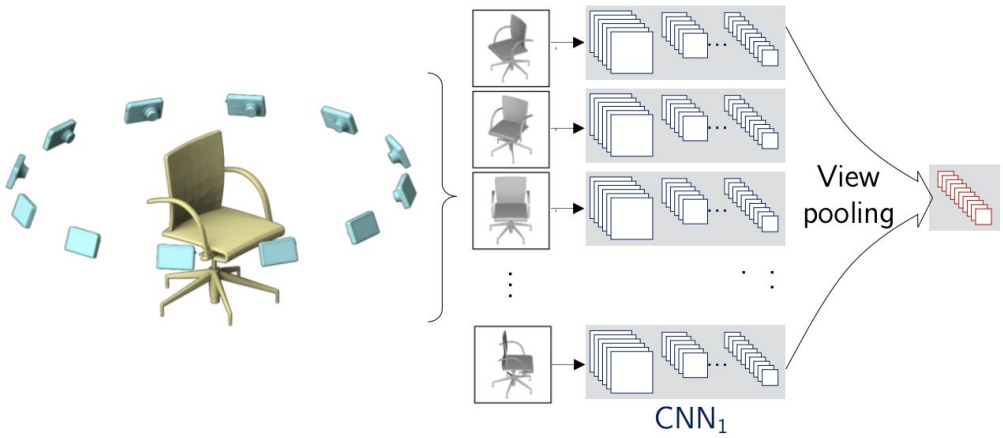

View pooling: element-wise max-pooling across all views

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Image-based: Multi-view CNN

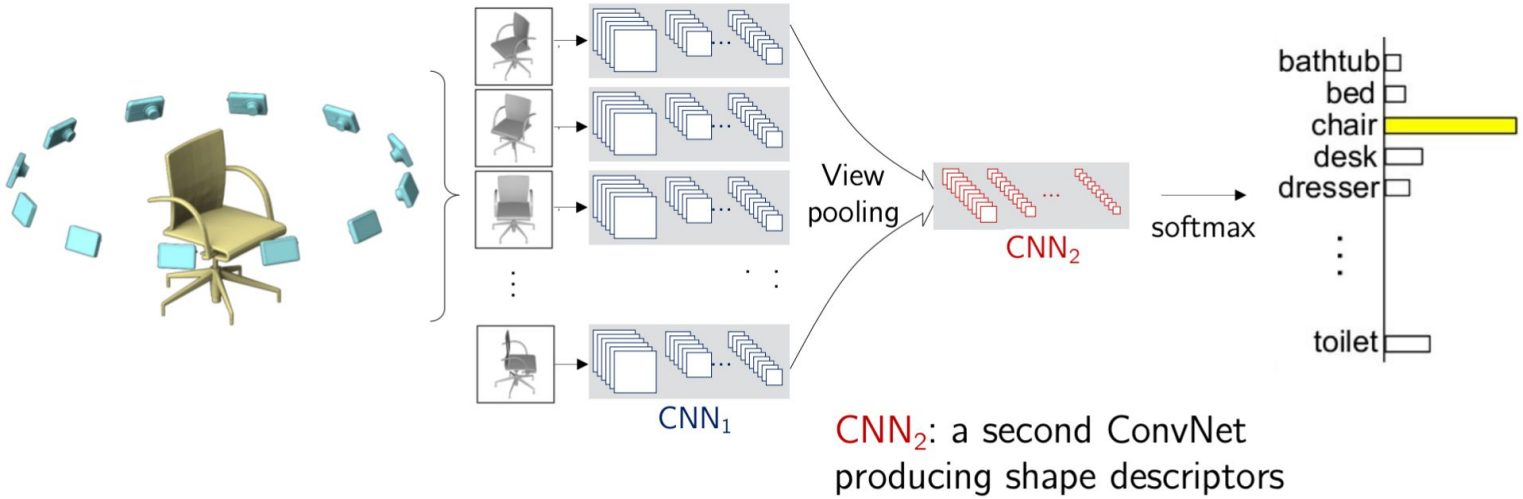

3D Deep Learning

Image-based: Multi-view CNN

Classification & Retrieval

	Method	Classification (Accuracy)	Retrieval (mAP)
Non-deep	SPH	68.2%	33.3%
	LFD	75.5%	40.9%
	3D ShapeNets	77.3%	49.2%
	FV, 12 views	84.8%	43.9%
	CNN, 12 views	88.6%	62.8%
	MVCNN, 12 views	89.9%	70.1%
	MVCNN+metric, 12 views	89.5%	80.2%
	MVCNN, 80 views	90.1%	70.4%
	MVCNN+metric, 80 views	90.1%	79.5%

On ModelNet 40

3D Deep Learning

Image-based

Advantages

- Gives good performance
- Simple, re-use standard components of CNNs
- Can use pretrained features

Disadvantages

- Memory
- Not geometric
- No invariance
- Need projection
- What if the input is noisy and/or incomplete? e.g., point cloud

3D Deep Learning

Pixels → Voxels: 3D Conv Deep Belief Networks (CDBN)

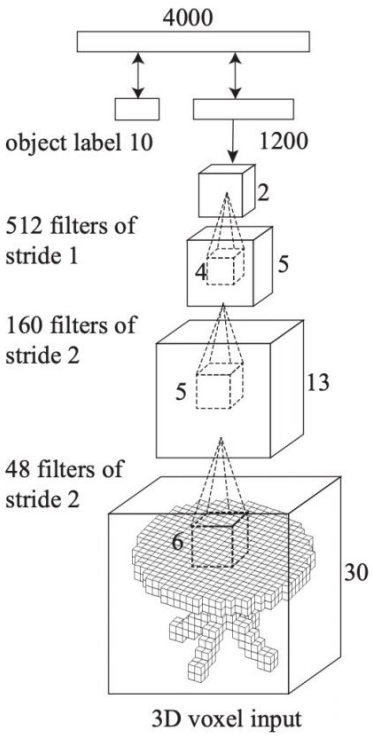

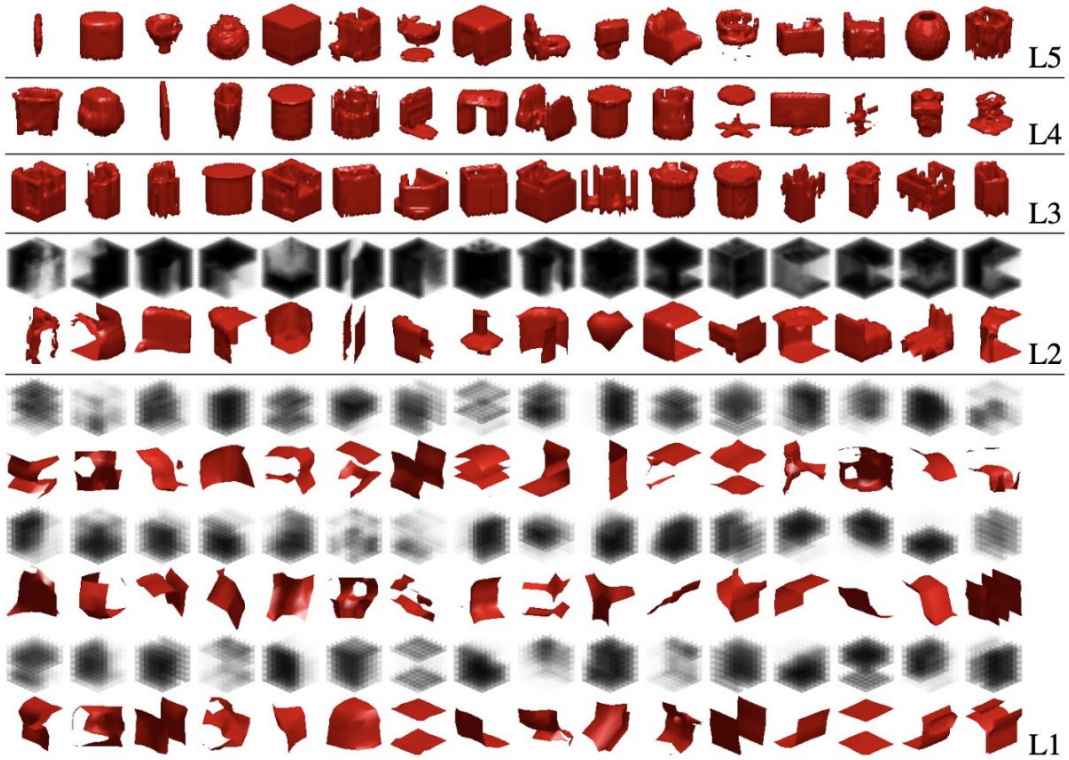

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Pixels → Voxels: 3D Conv Deep Belief Networks (CDBN)

Generative Modeling

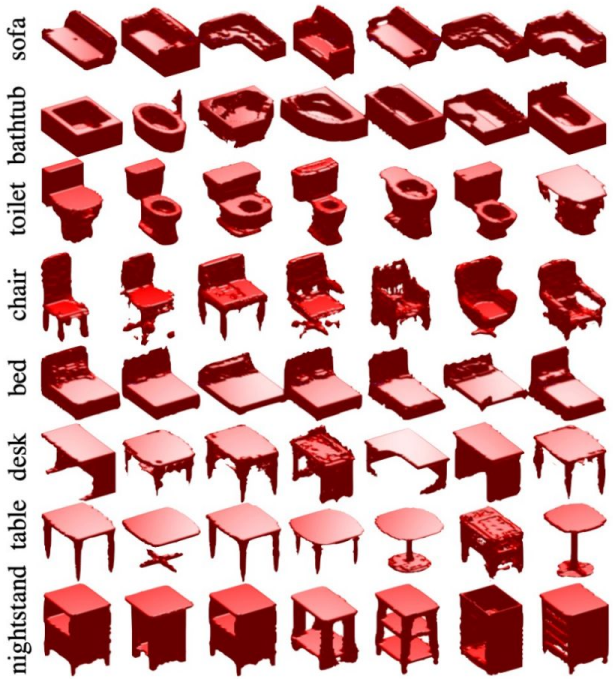

10 classes	SPH [18]	LFD [8]	Ours
classification	79.79 %	79.87 %	**83.54%**
retrieval AUC	45.97%	51.70%	**69.28%**
retrieval MAP	44.05%	49.82%	**68.26%**
40 classes	SPH [18]	LFD [8]	Ours
classification	68.23%	75.47%	**77.32%**
retrieval AUC	34.47%	42.04%	**49.94%**
retrieval MAP	33.26%	40.91%	**49.23%**

Table 1: **Shape Classification and Retrieval Results.**

3D Deep Learning

Pixels → Voxels: 3D GANs

Generative Modeling

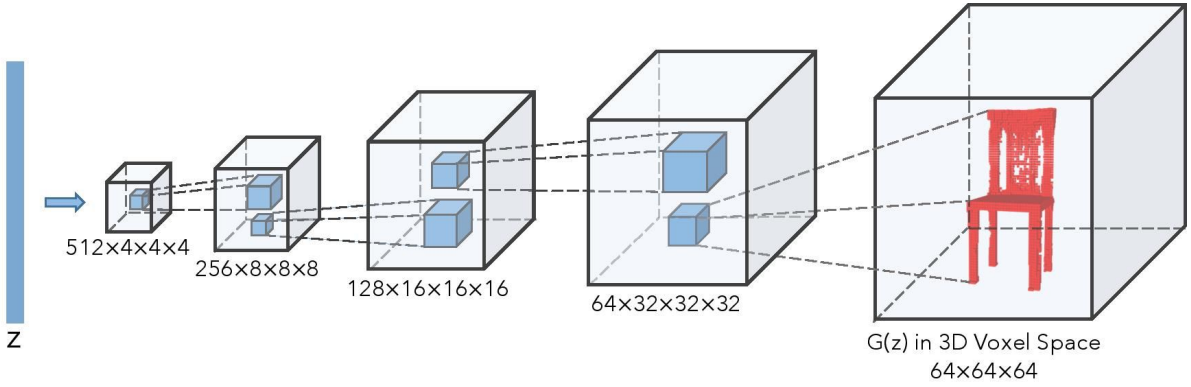

Image from: Wu et al., Learning a Probabilistic Latent Space of Object Shapes via 3D Generative-Adversarial Modeling, 2016

3D Deep Learning

Pixels → Voxels:

- Represent a shape with a V x V x V grid of occupancies
- (+) Conceptually simple: just a 3D grid!
- (-) Need high spatial resolution to capture fine structures
- (-) Scaling to high resolutions is nontrivial!

Image from: Wu et al., Learning a Probabilistic Latent Space of Object Shapes via 3D Generative-Adversarial Modeling, 2016

3D Deep Learning

Pixels → Voxels → Octree: Classification

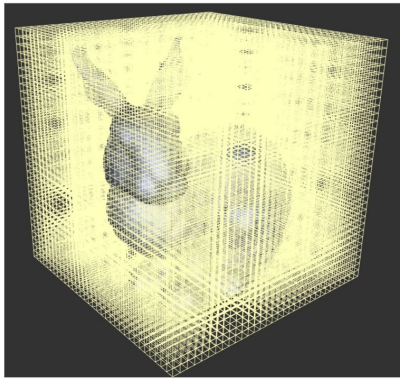

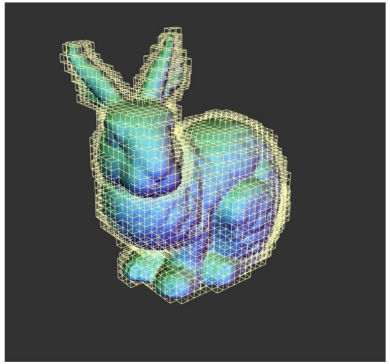

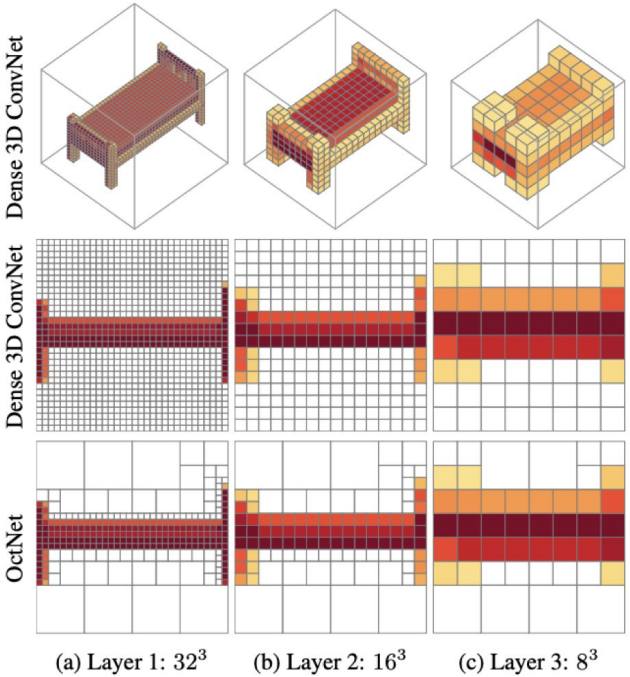

Riegler et al. OctNet. CVPR 2017

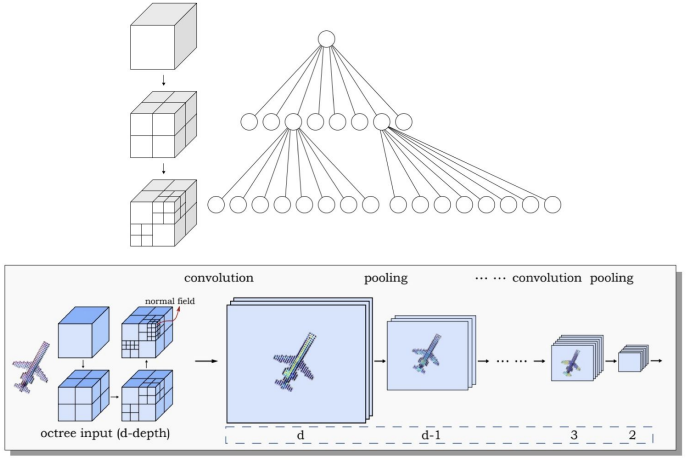

Wang et al. O-CNN. SIGGRAPH 2017

- Store the sparse surface signals
- Constrain the computation near the surface

3D Deep Learning

Pixels → Voxels → Octree:

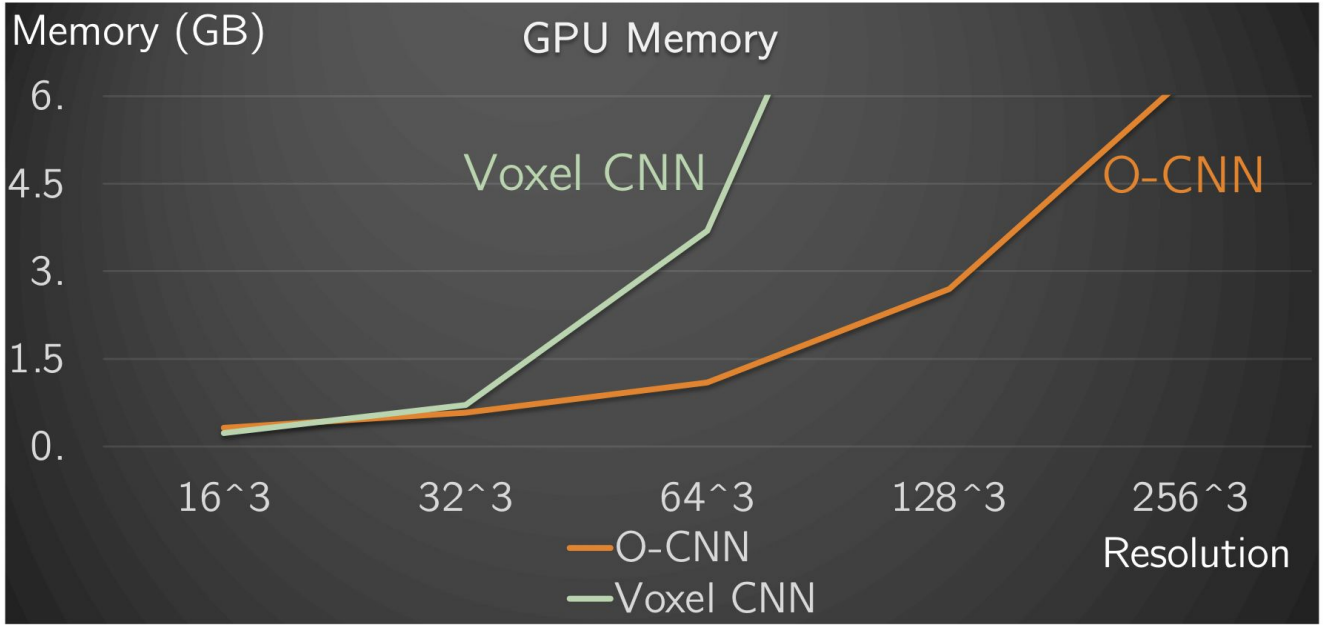

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Pixels → Voxels → Octree: Generative Network

Avoid $O(n^3)$ reconstruction

- Octree representation of shapes
- Generate the octree layer by layer

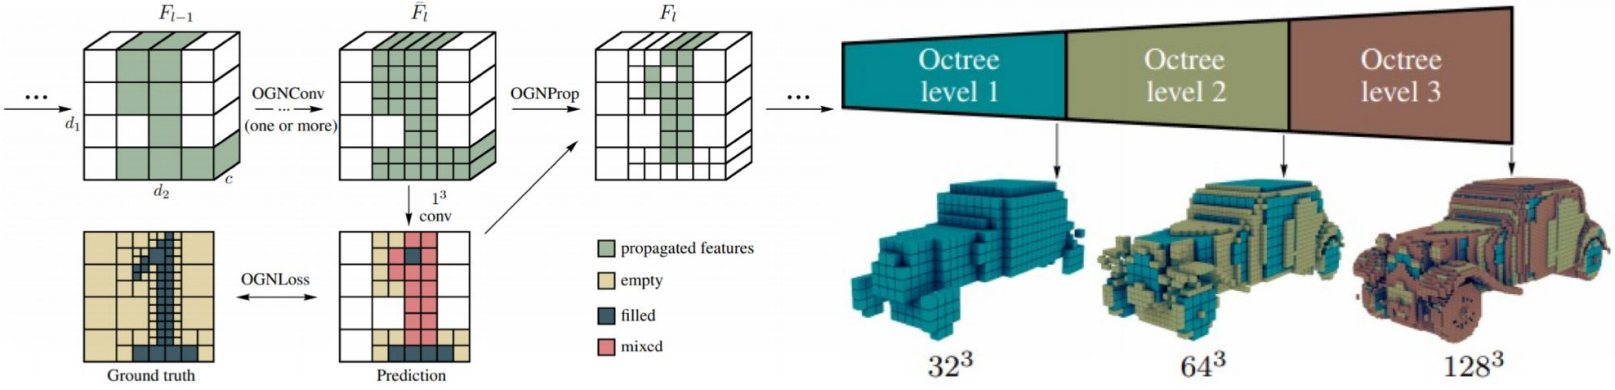

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Point Cloud: PointNet

Research Question:

Can we achieve effective feature learning directly on point clouds?

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

End-to-end learning for **scattered, unordered** point data

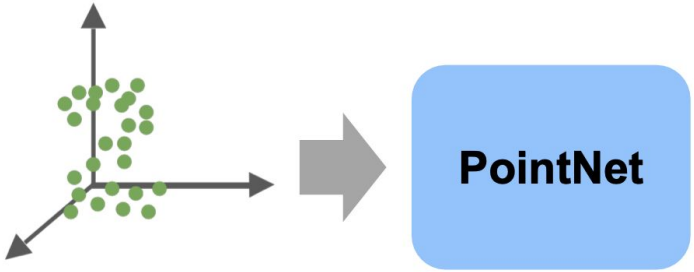

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

End-to-end learning for **scattered, unordered** point data

Unified framework for various tasks

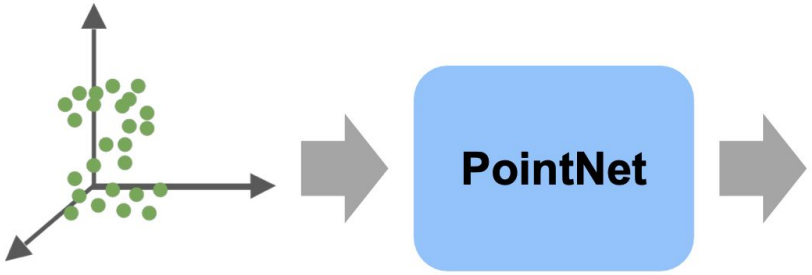

Object Classification

Object Part Segmentation

Semantic Scene Parsing

...

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

End-to-end learning for **scattered, unordered** point data

Unified framework for various tasks

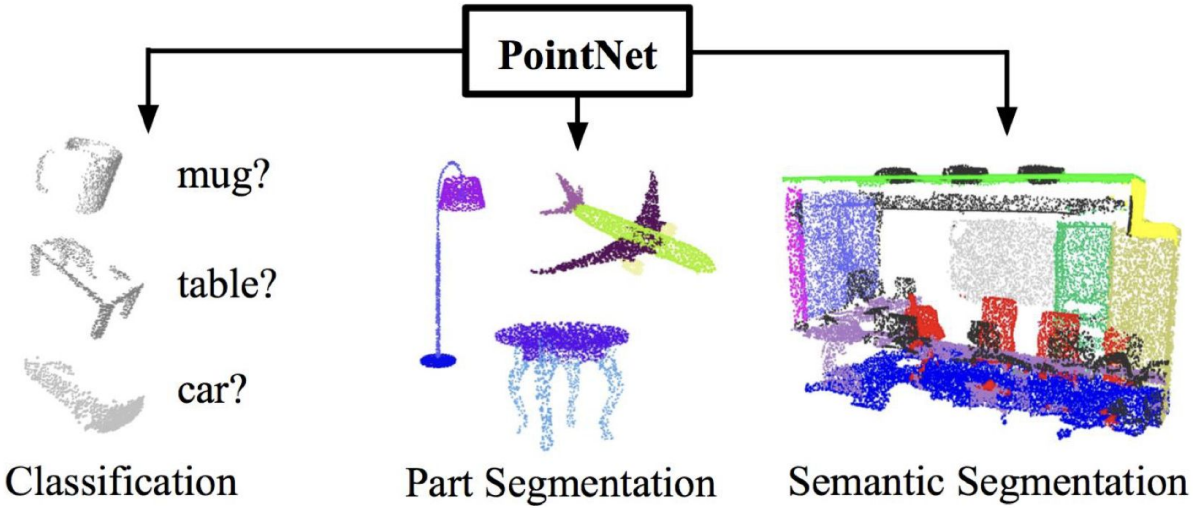

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Challenges

- **<u>Unordered</u> point set as input**
  Model needs to be invariant to N! Permutations.

- **Invariance under <u>geometric transformations</u>**
  Point cloud rotations should not alter classification results.

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Challenges

- **Unordered point set as input**
  Model needs to be invariant to N! Permutations.

- **Invariance under geometric transformations**
  Point cloud rotations should not alter classification results.

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Unordered point set as input

Point cloud: N **orderless** points, each represented by a D dim vector.

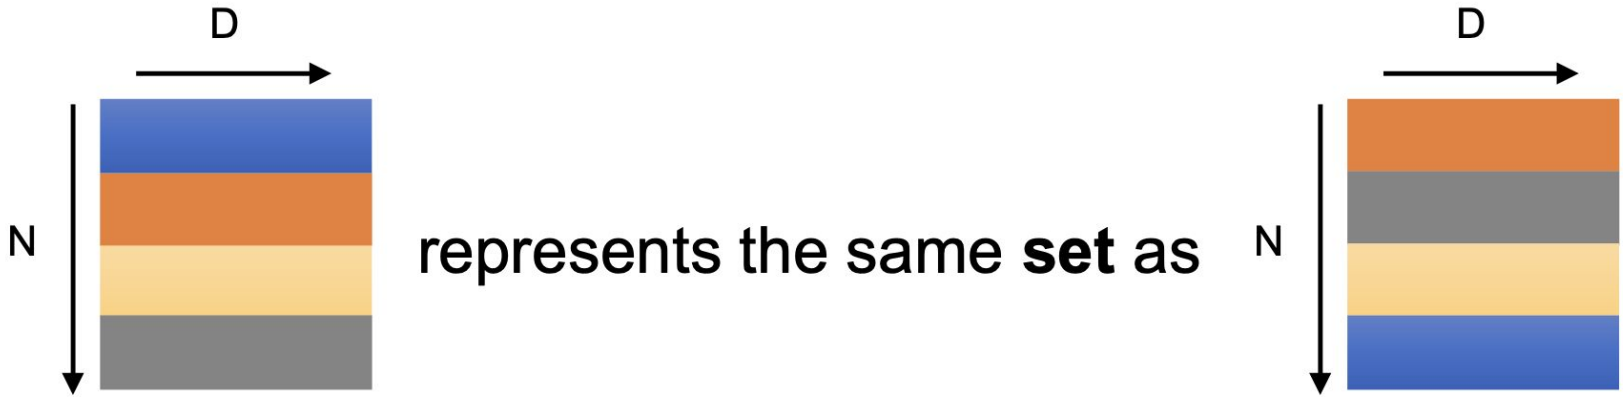

Model needs to be invariant to N! Permutations.

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Permutation Invariance: Symmetric Function

$$f(x_1, x_2, \ldots, x_n) \equiv f(x_{\pi_1}, x_{\pi_2}, \ldots, x_{\pi_n}), \quad x_i \in \mathrm{R}^D$$

Examples:

$$f(x_1, x_2, \ldots, x_n) = \max\{x_1, x_2, \ldots, x_n\}$$

$$f(x_1, x_2, \ldots, x_n) = x_1 + x_2 + \ldots + x_n$$

$$\ldots$$

How can we construct a family of symmetric functions by neural networks?

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Permutation Invariance: Symmetric Function

Observe:

$f(x_1, x_2, \ldots, x_n) = \gamma \circ g(h(x_1), \ldots, h(x_n))$ is symmetric if g is symmetric

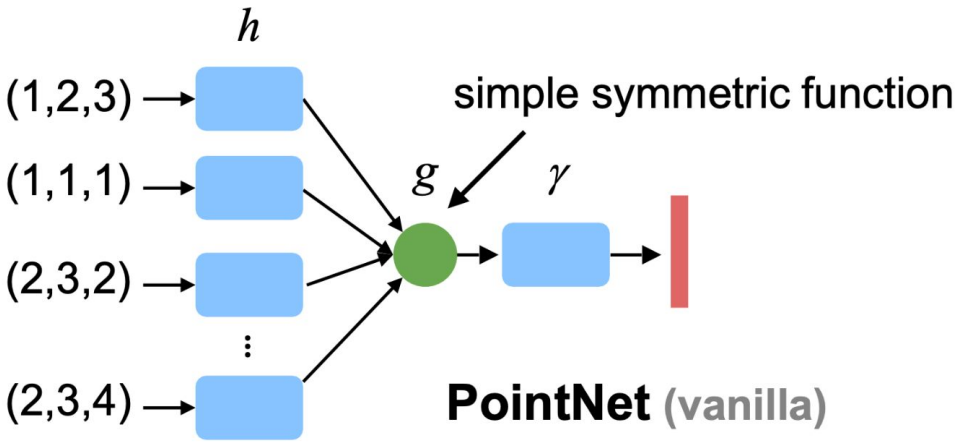

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Permutation Invariance: Symmetric Function

Empirically, we use **multi-layer perceptron (MLP)** and **max pooling**:

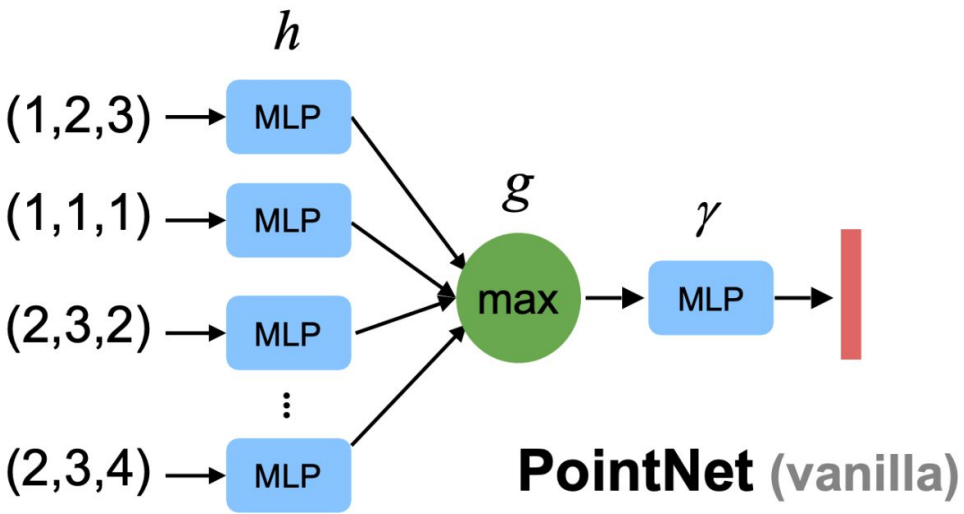

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Challenges

- **Unordered point set as input**
  Model needs to be invariant to N! Permutations.

- **Invariance under geometric transformations**
  Point cloud rotations should not alter classification results.

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Input Alignment by Transformer Network

Idea: Data dependent transformation for automatic alignment

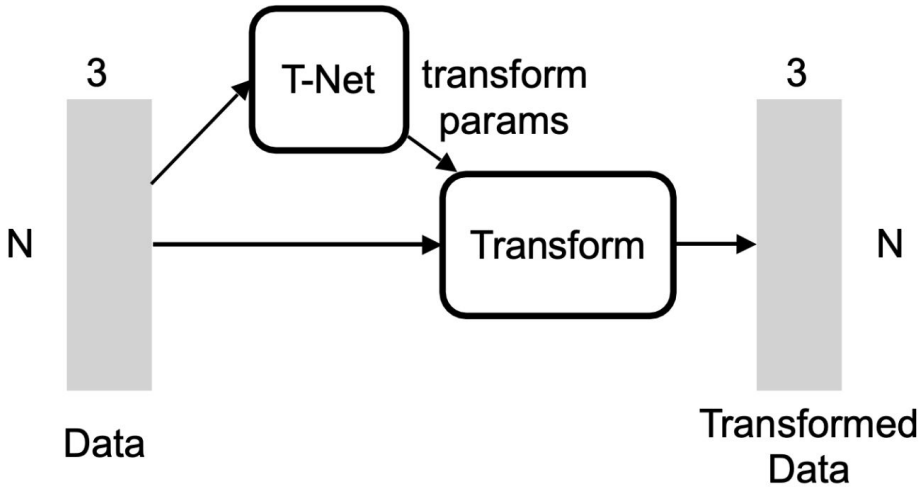

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Input Alignment by Transformer Network

The transformation is just matrix multiplication!

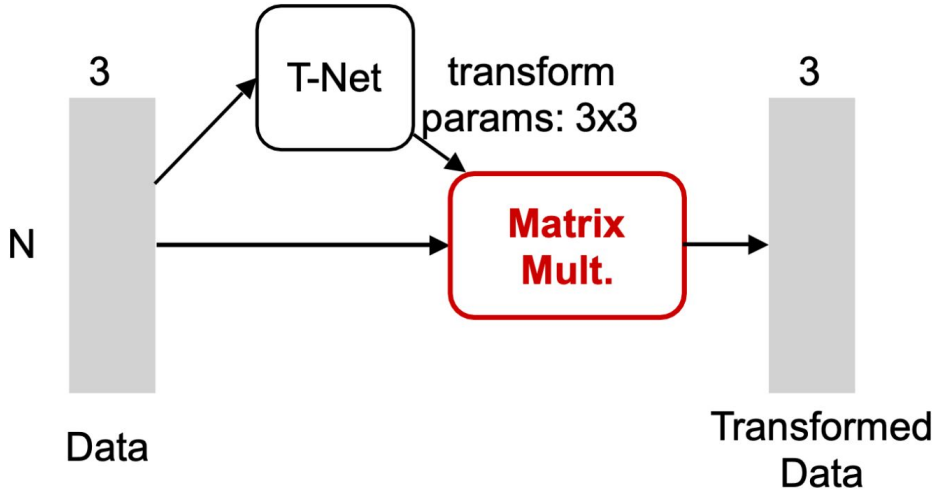

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Input Alignment by Transformer Network

Embedding Space Alignment

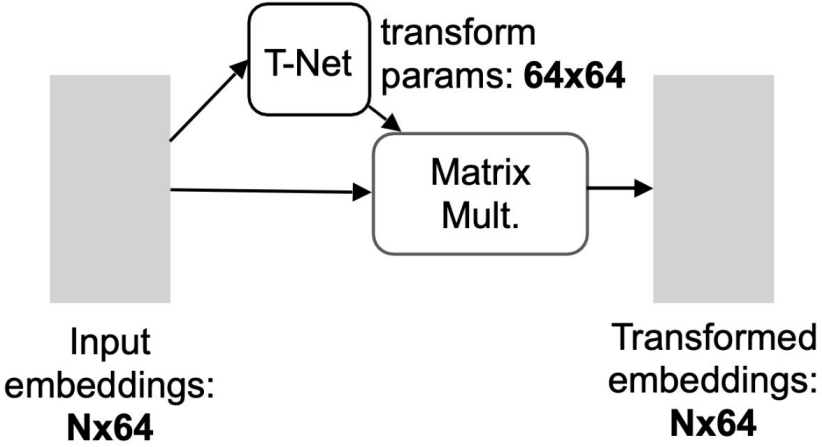

Regularization:

Transform matrix A 64x64 close to orthogonal:

$$L_{reg} = \|I - AA^T\|_F^2$$

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

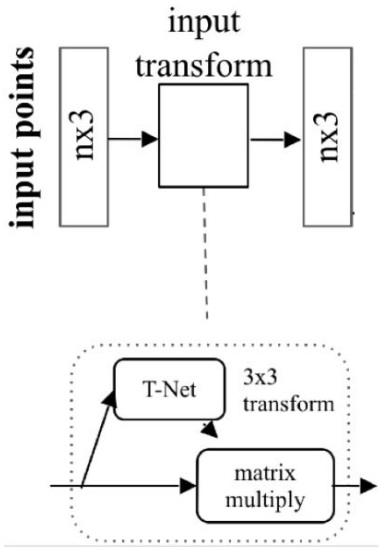

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

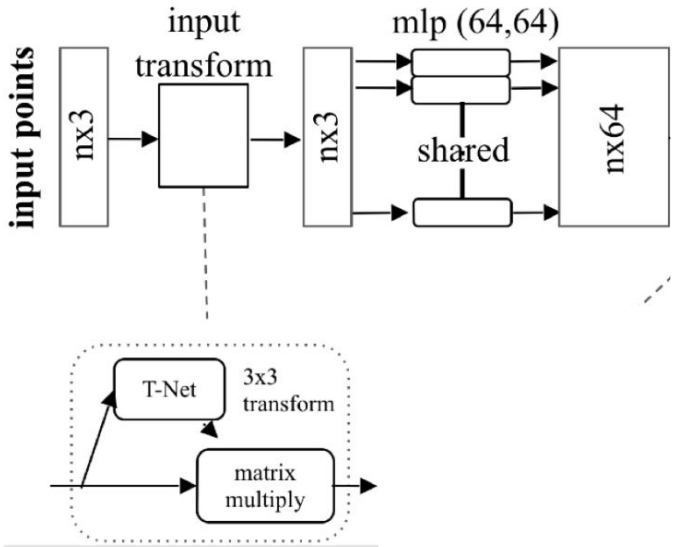

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

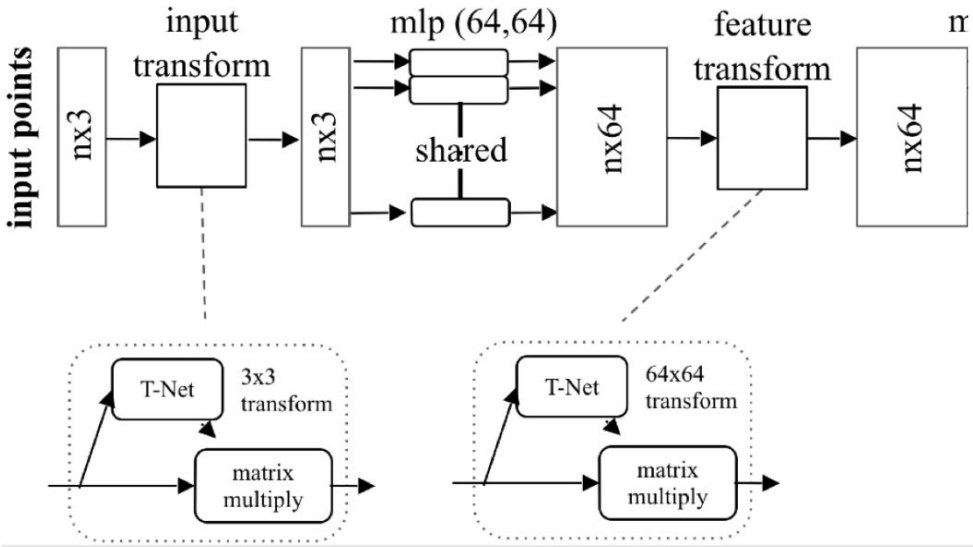

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

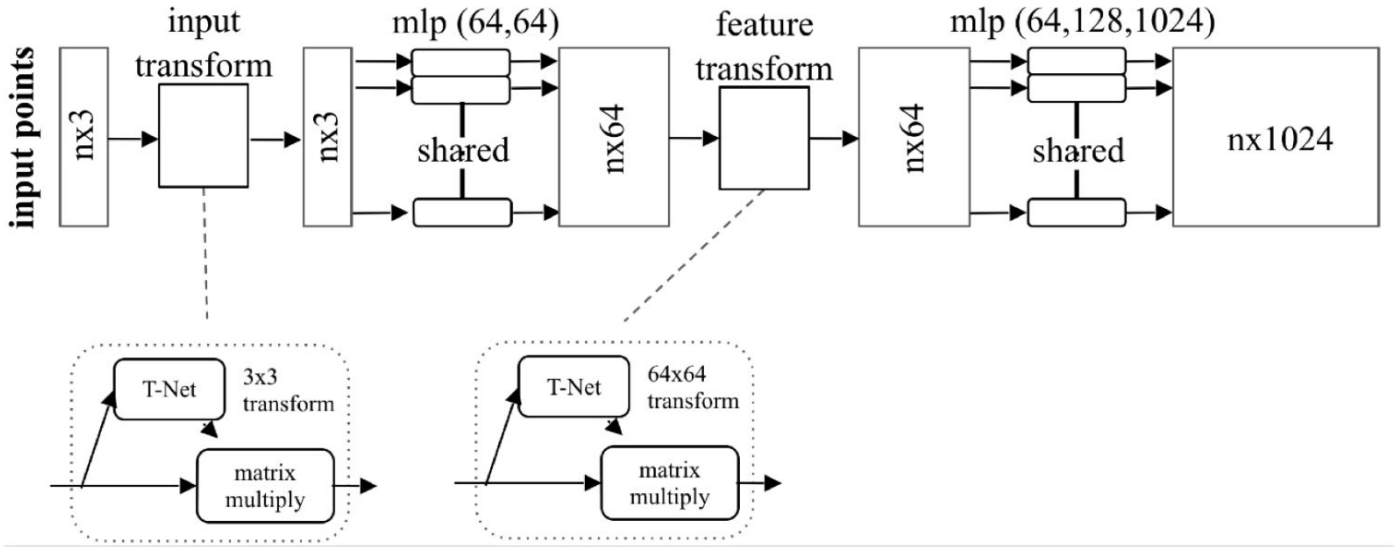

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

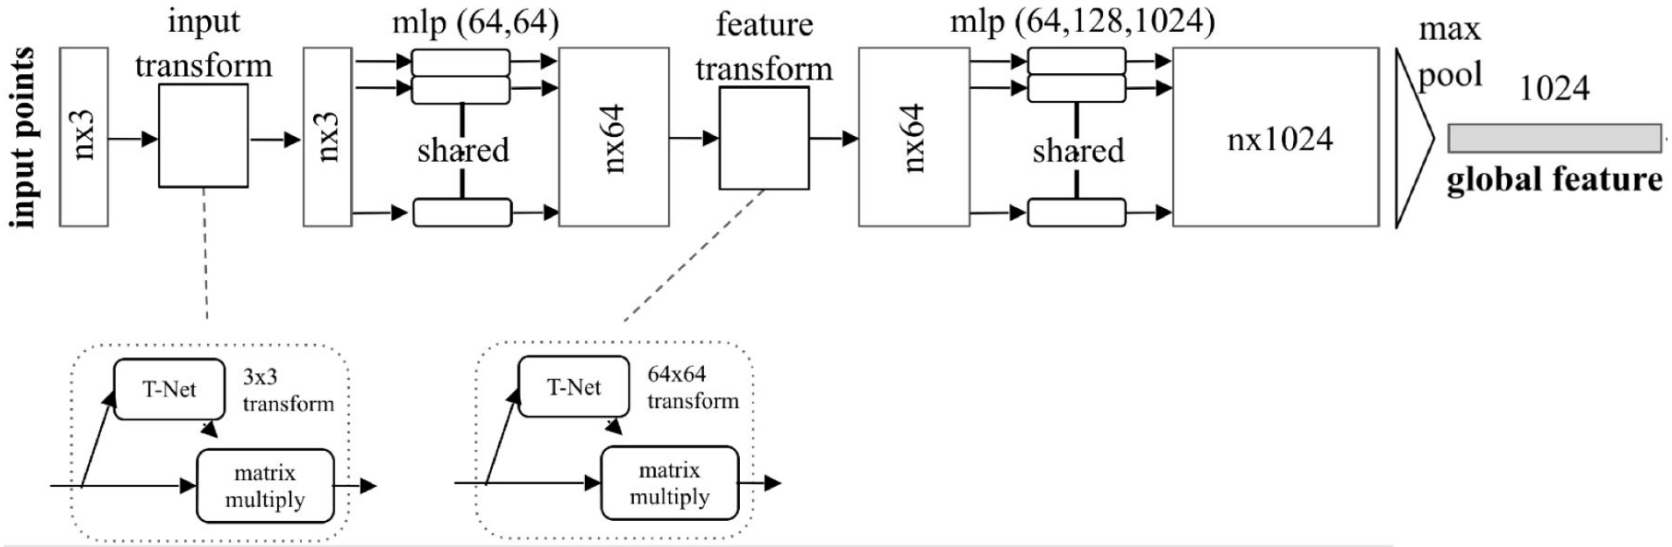

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Classification

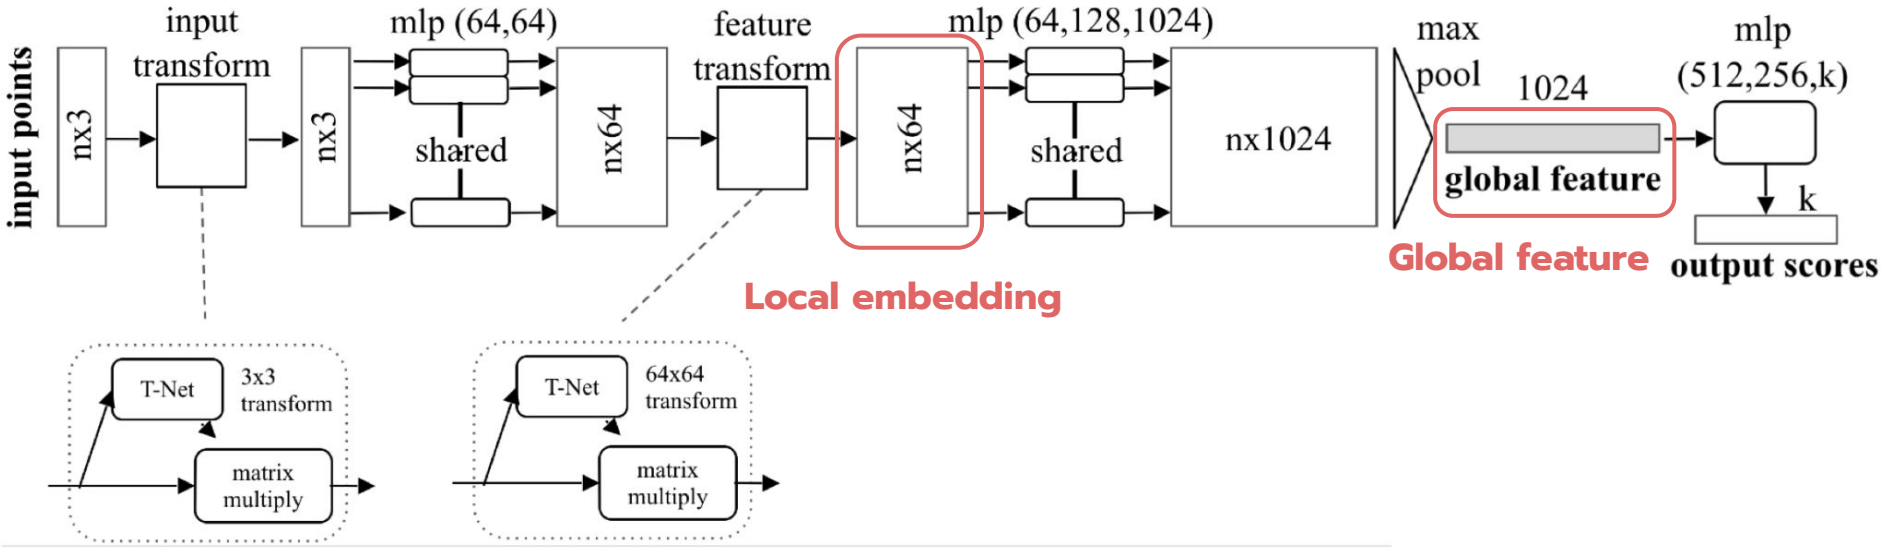

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

Segmentation

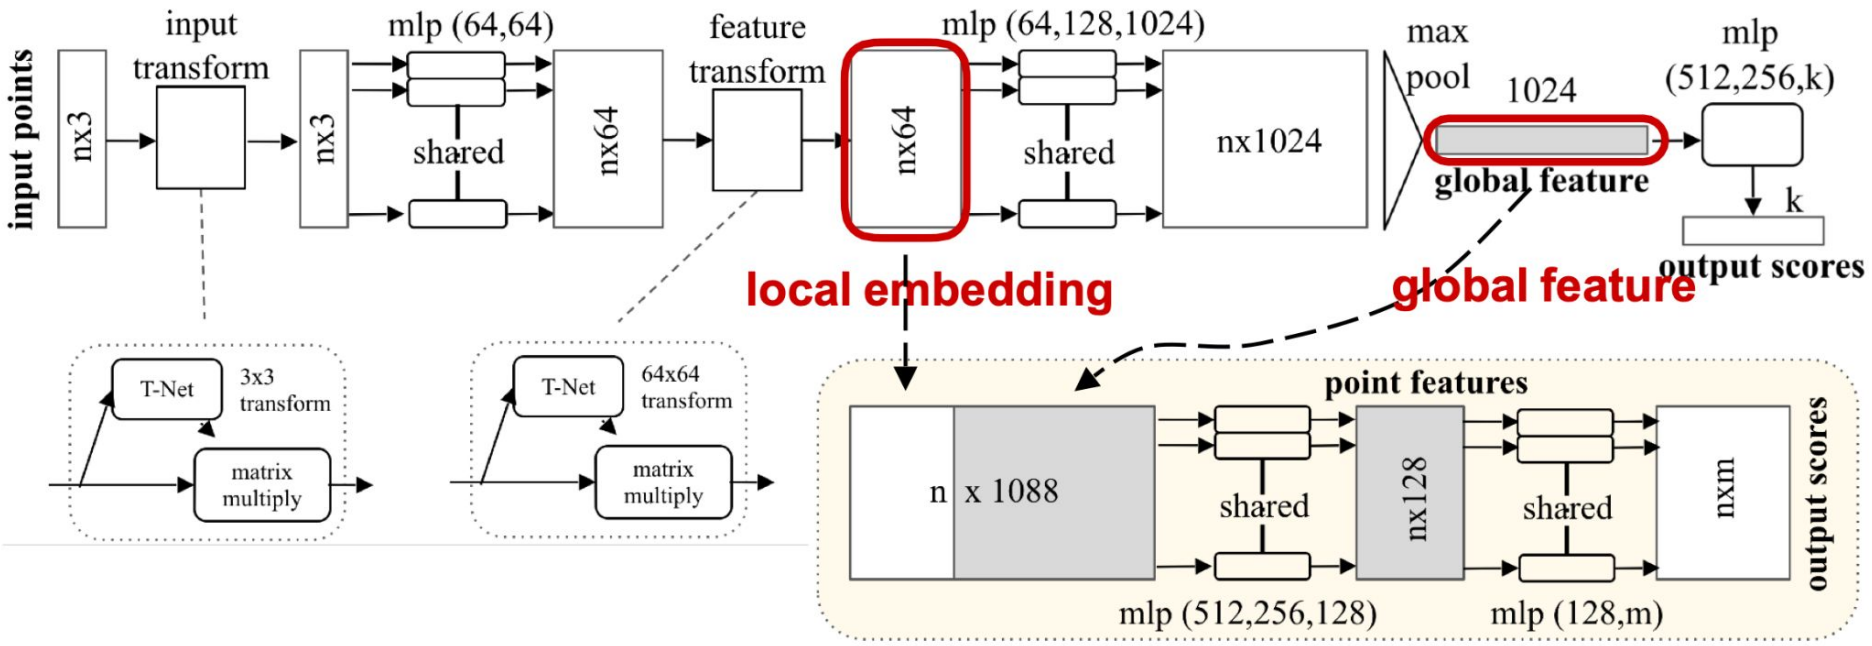

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet - Results

Object Classification

	input	#views	accuracy avg. class	accuracy overall
SPH [12]	mesh	-	68.2	
3DShapeNets [29]	volume	1	77.3	84.7
VoxNet [18]	volume	12	83.0	85.9
Subvolume [19]	volume	20	86.0	**89.2**
LFD [29]	image	10	75.5	-
MVCNN [24]	image	80	**90.1**	-
Ours baseline	point	-	72.6	77.4
Ours PointNet	point	1	86.2	**89.2**

3D CNNs

dataset: ModelNet40; metric: 40-class classification accuracy (%)

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet - Results

Object Part Segmentation

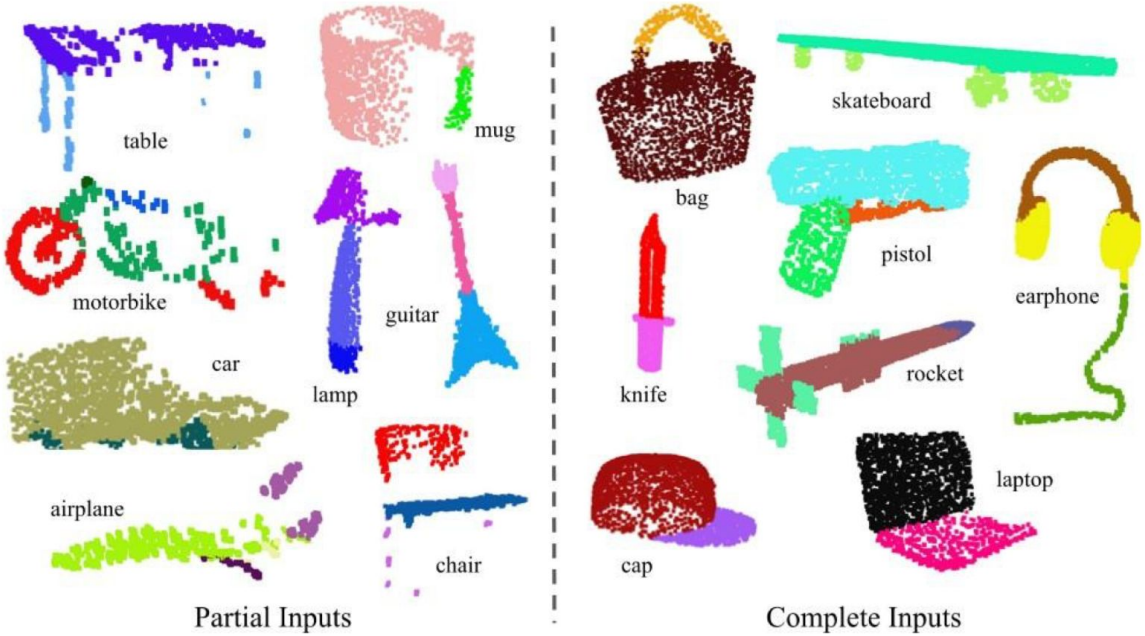

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet - Results

Semantic Scene Parsing

dataset: Stanford 2D-3D-S (Matterport scans)

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet - Limitations

Hierarchical feature learning
Multiple levels of abstraction

Global feature learning
Either one point or all points

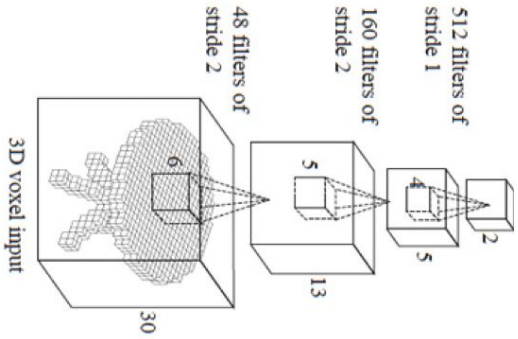

3D CNN (Wu et al.)

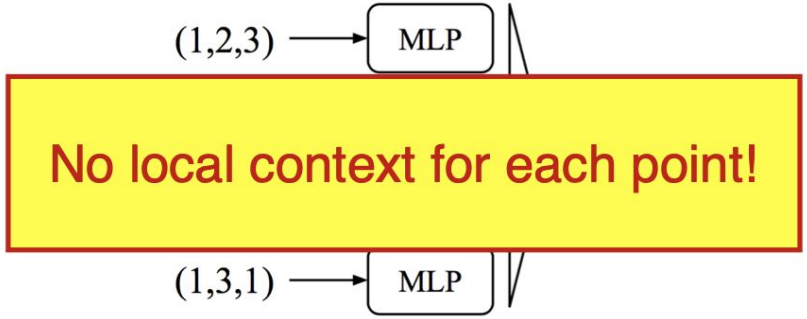

PointNet (vanilla) (Qi et al.)

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: PointNet

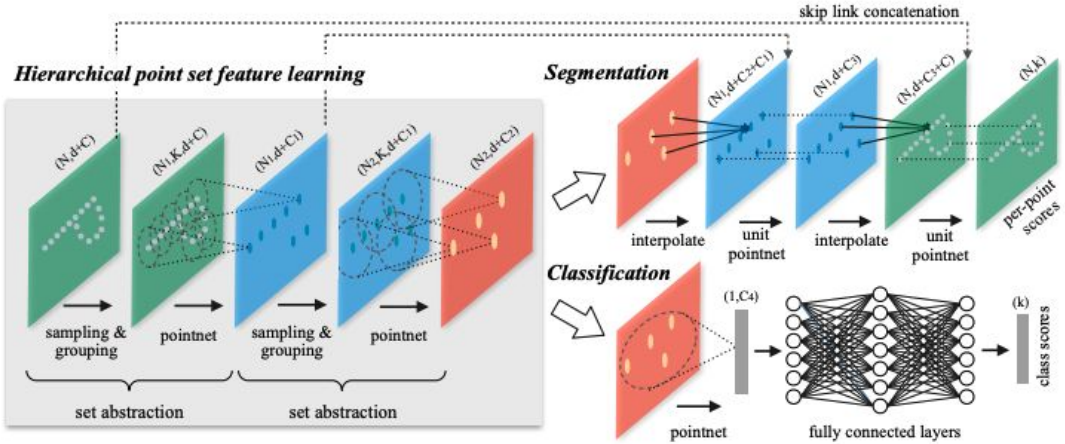

Basic idea: Apply pointnet at local regions.

- ✓ Hierarchical feature learning
- ✓ Translation invariant
- ✓ Permutation invariant



N points in (X,Y)

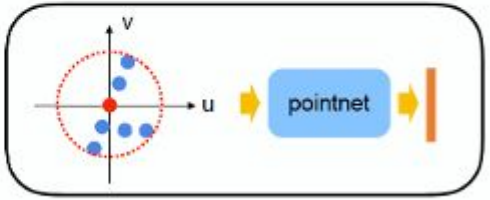

k points in local coordinates (u,v)

Adopted from: Hao Su, A Tutorial on 3D Deep Learning, CVPR 2017

3D Deep Learning

Point Cloud: Graph NN

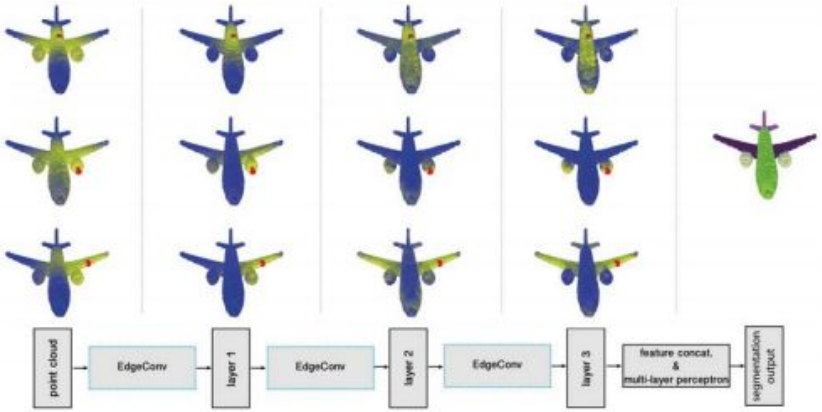

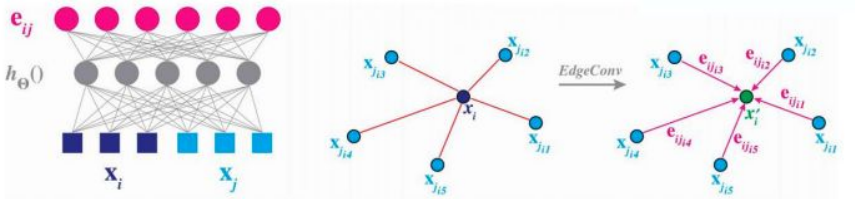

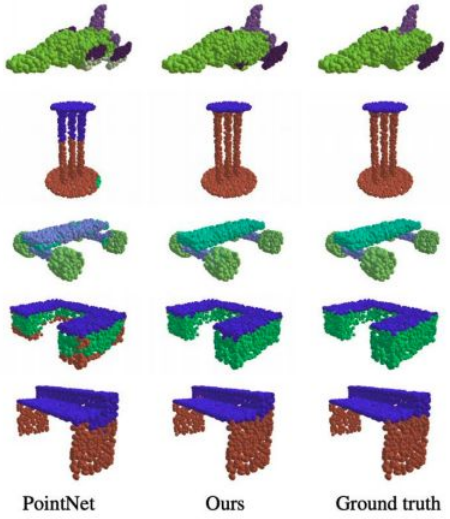

Edge convolution operator is defined as

$$h_\theta(x_i, x_j) = h_\theta(x_i, x_j - x_i)$$

$$\mathbf{x}_i' = \underset{j:(i,j)\in\mathcal{E}}{\square} h_\Theta(\mathbf{x}_i, \mathbf{x}_j).$$

aggregation operation $\square$ (e.g., $\sum$ or max)

3D Deep Learning

Distance Metrics for Point Cloud

Chamfer distance We define the Chamfer distance between $S_1, S_2 \subseteq \mathbb{R}^3$ as:

$$d_{CD}(S_1, S_2) = \sum_{x \in S_1} \min_{y \in S_2} \|x - y\|_2 + \sum_{y \in S_2} \min_{x \in S_1} \|x - y\|_2$$

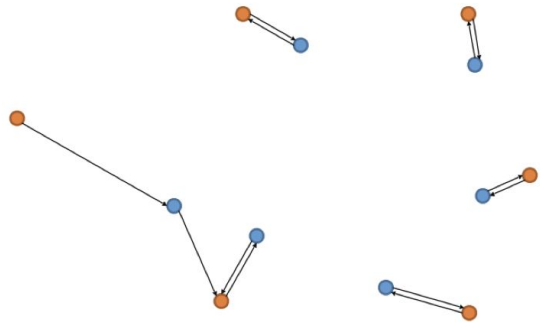

Earth Mover's distance Consider $S_1, S_2 \subseteq \mathbb{R}^3$ of equal size $s = |S_1| = |S_2|$. The EMD between A and B is defined as:

$$d_{EMD}(S_1, S_2) = \min_{\phi: S_1 \to S_2} \sum_{x \in S_1} \|x - \phi(x)\|_2$$

where $\phi : S_1 \to S_2$ is a bijection.

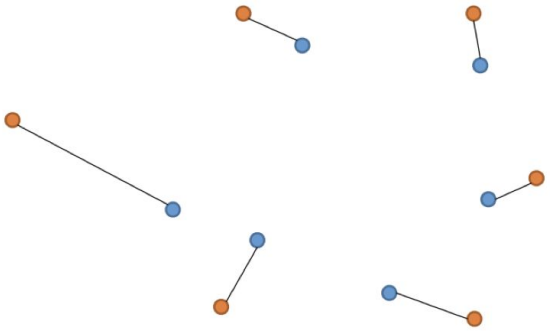

Adopted from: Jianjun Wu, CS231n: Deep Learning for Computer Vision, Spring 2025
Stanford University

3D Deep Learning

Mesh R-CNN:

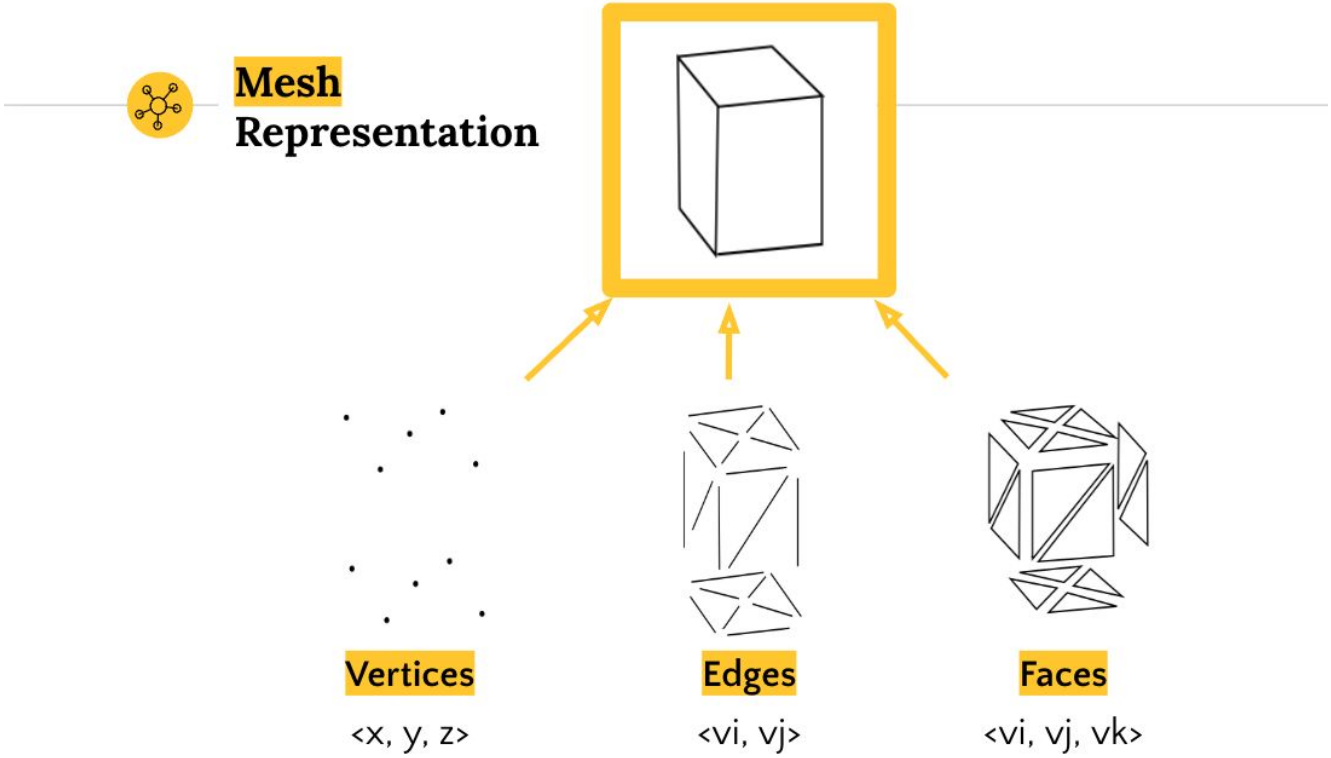

Adopted from: https://ranahanocka.github.io/MeshCNN/

3D Deep Learning

Mesh R-CNN:

Meshes are Irregular

Adapt to the surface

- → Large polygons in flat regions
- → Small polygons in detailed regions

Non-Uniform & Efficient

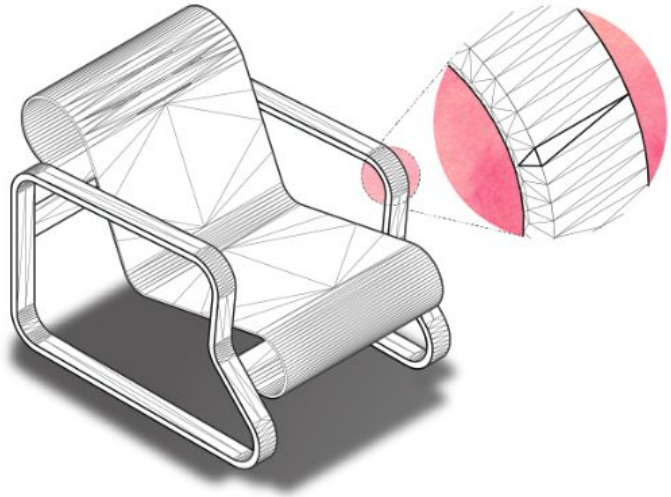

Adopted from: https://ranahanocka.github.io/MeshCNN/

3D Deep Learning

Mesh R-CNN:

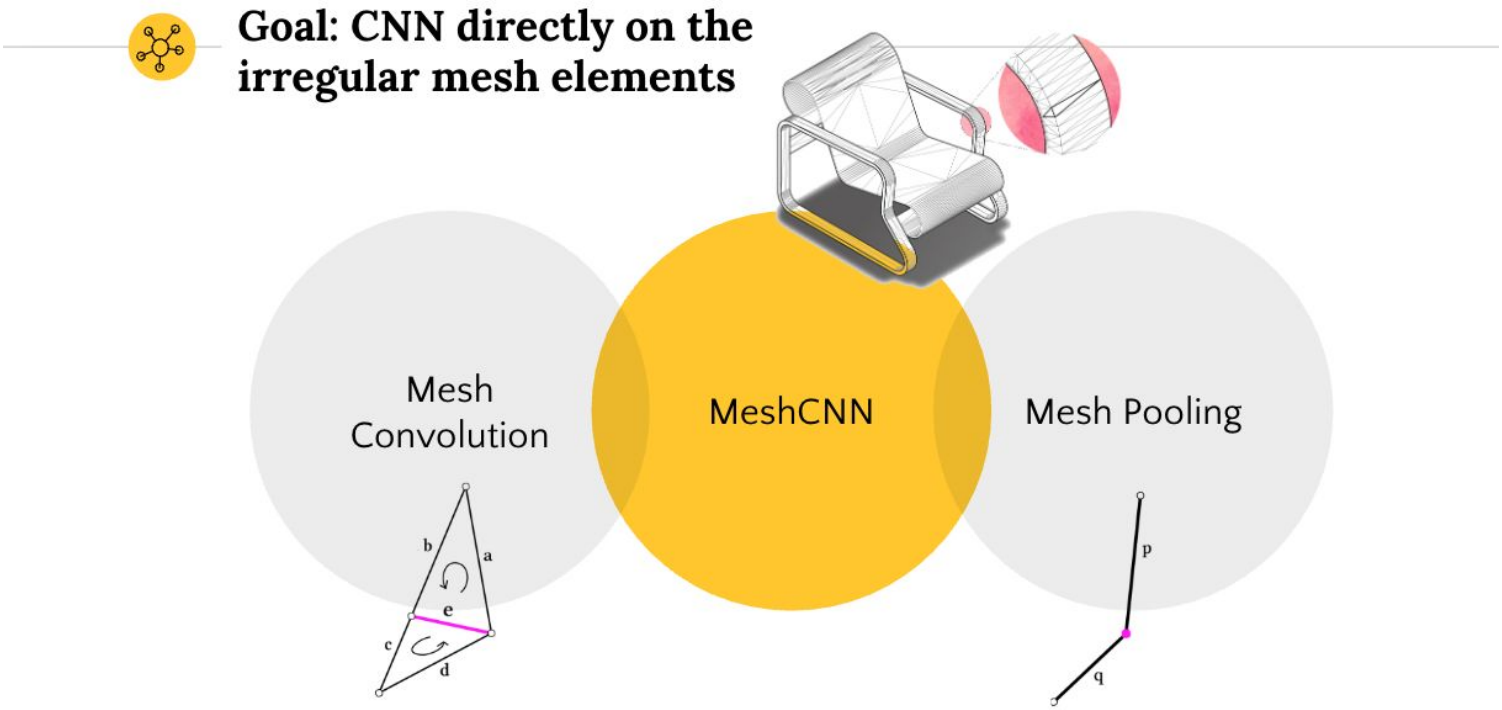

Adopted from: https://ranahanocka.github.io/MeshCNN/

3D Deep Learning

Mesh R-CNN:

Adopted from: https://ranahanocka.github.io/MeshCNN/

3D Deep Learning

Mesh R-CNN:

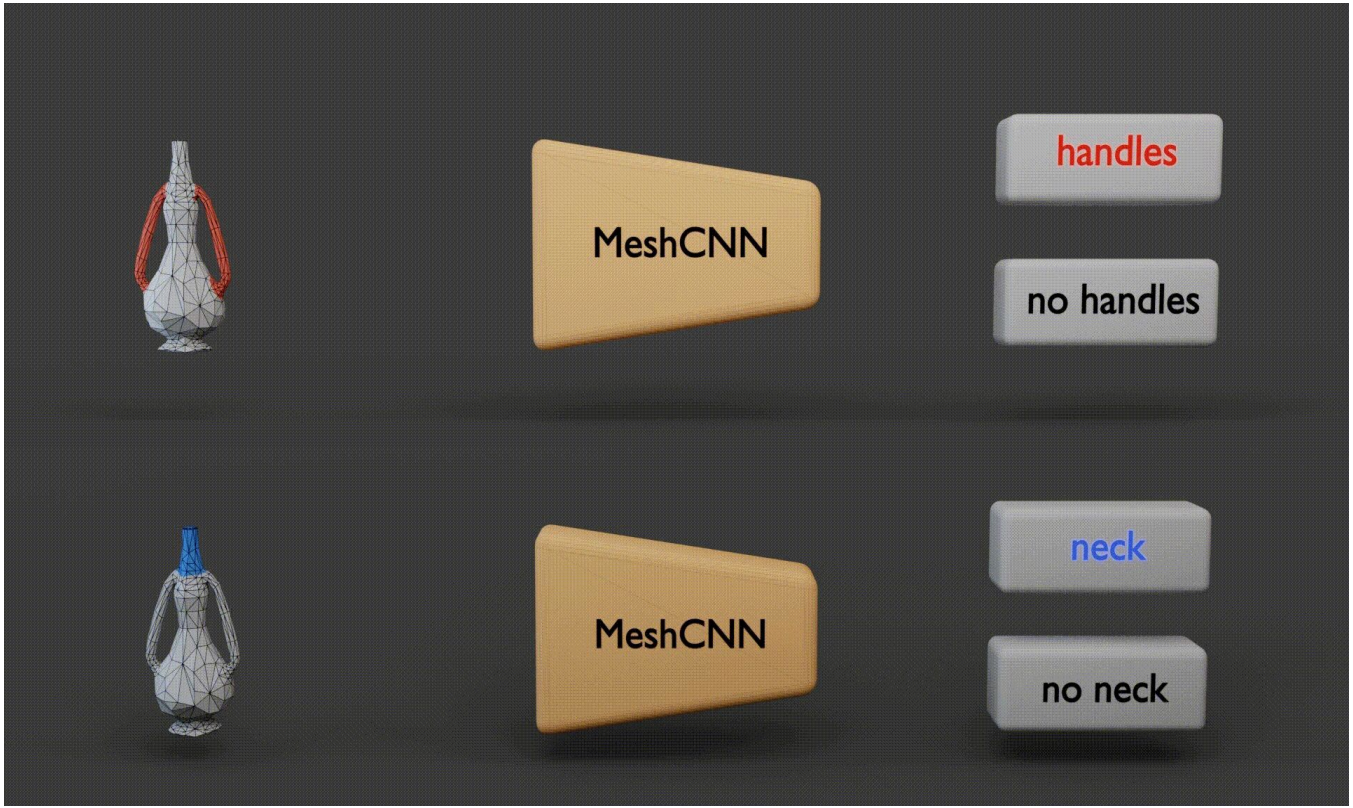

Adopted from: https://ranahanocka.github.io/MeshCNN/

3D Deep Learning

Mesh R-CNN: Results

Segmentation

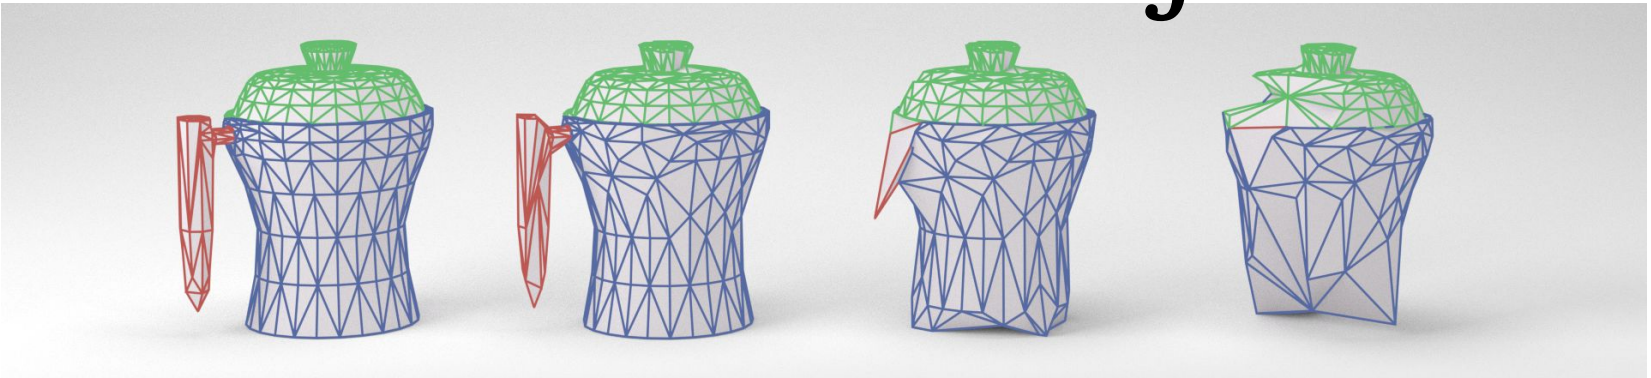

Human Segmentation

Adopted from: https://ranahanocka.github.io/MeshCNN/

3D Deep Learning

Implicit Representation: Signed Distance Function (SDF)

DeepSDF: Learning Continuous Signed Distance Functions for Shape Representation

Jeong Joon Park[1,3†] Peter Florence [2,3†] Julian Straub[3] Richard Newcombe[3] Steven Lovegrove[3]

[1]University of Washington [2]Massachusetts Institute of Technology [3]Facebook Reality Labs

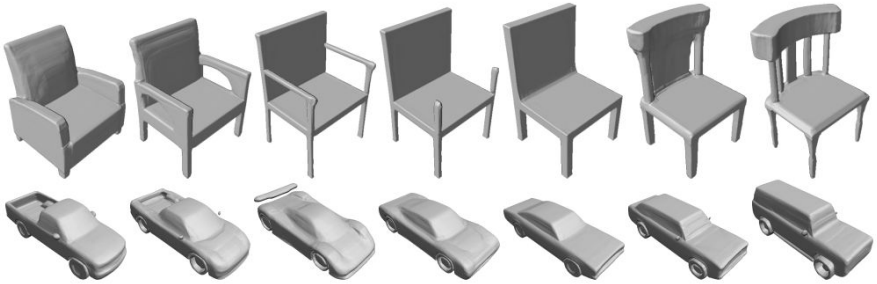

Figure 1: DeepSDF represents signed distance functions (SDFs) of shapes via latent code-conditioned feed-forward decoder networks. Above images are raycast renderings of DeepSDF interpolating between two shapes in the learned shape latent space. Best viewed digitally.

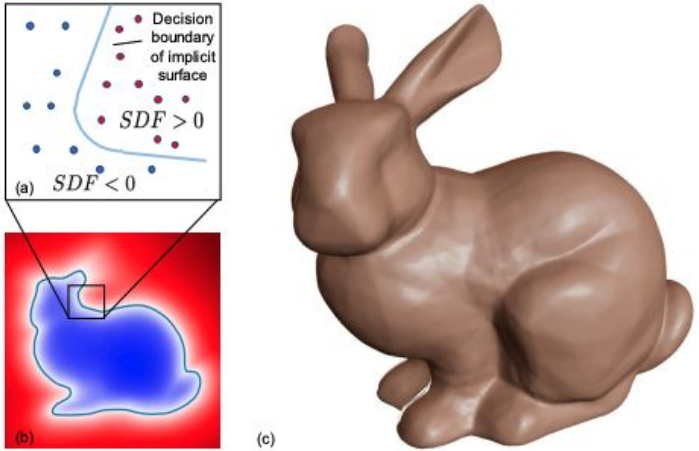



(a) Single Shape DeepSDF **(b)** Coded Shape DeepSDF

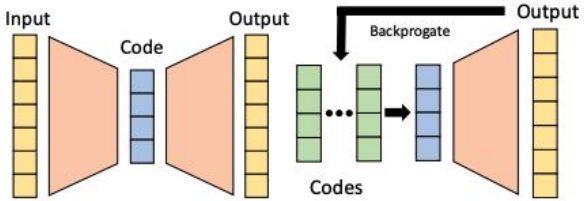

(a) Auto-encoder **(b)** Auto-decoder

3D Deep Learning

Implicit Representation: Signed Distance Function (SDF)

Generating Mesh-based Shapes from Learned Latent Spaces of Point Clouds with VAE GAN

Cherdsak Kingkan, and Koichi Hashimoto
Int. Conf. Pattern Recognition (ICPR2018)

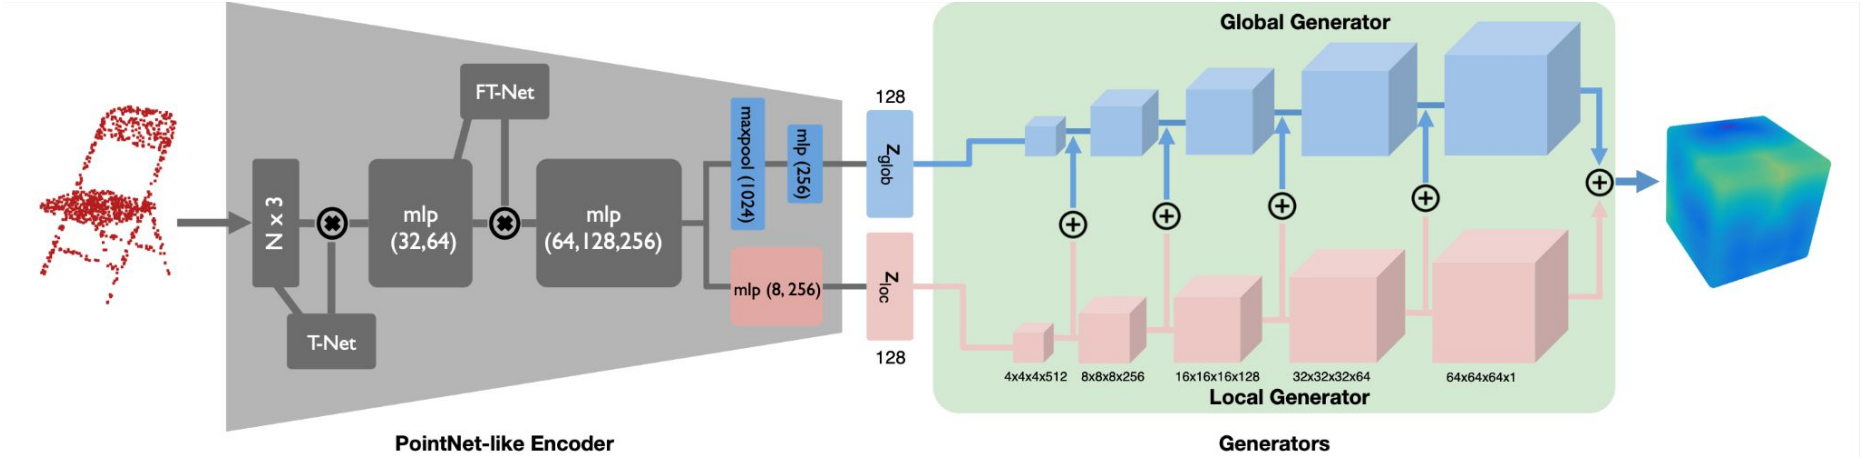

3D Deep Learning

Implicit Representation: Signed Distance Function (SDF)

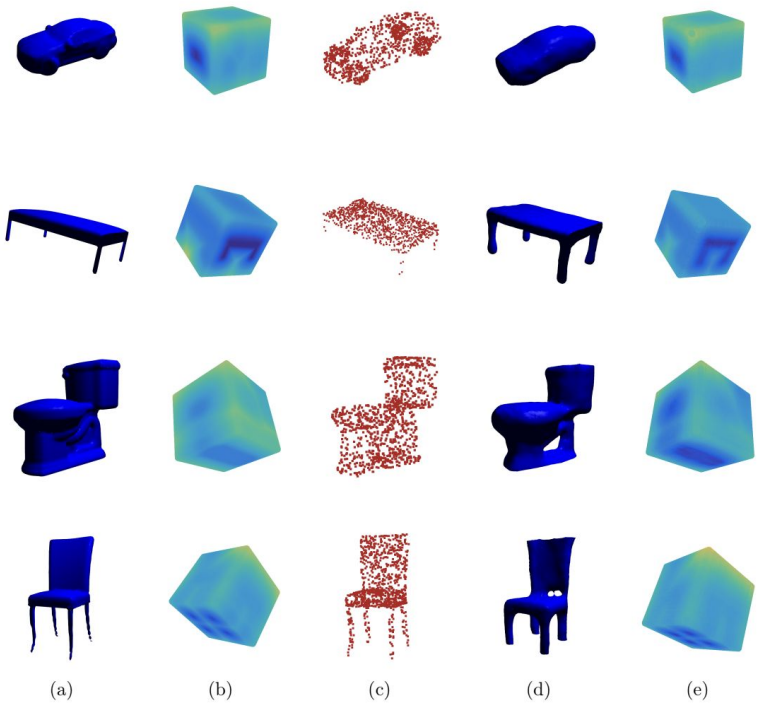

Figure 2.14: Examples showing mesh, SDFs, and point clouds of objects and its corresponding reconstructed mesh and SDFs. (a)-(c) show the mesh, SDFs, and point clouds of objects. (d)-(e) show the corresponding reconstructed mesh-based and SDFs of objects.