```
m=float(input("enter mass in kg :"))

v=float(input("enter velocity in m/s:"))

momentum =float(m)* float (v)

print(f"{momentum:.2f}kgm/s")
```

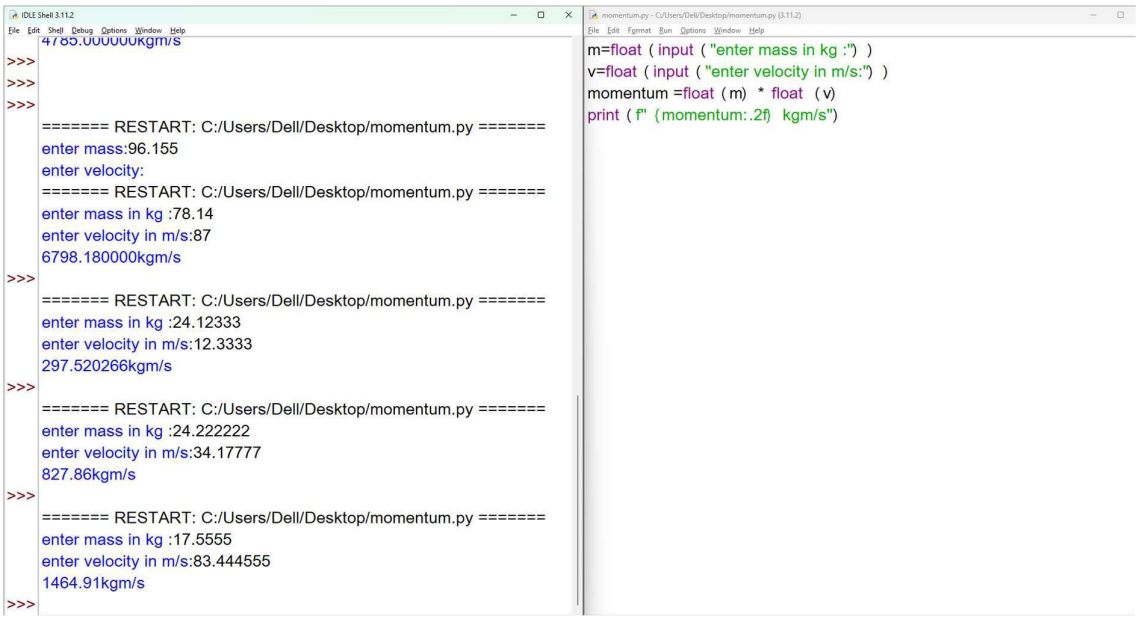

```
import math
n = int(input("enter the digit"))
if 1<=n <=9 : #single digit number
    print(n**2)
elif 10<=n<=99: #double digit number
    print(math.sqrt(n))
elif 100<=n<=999: # triple digit number
    print(math.cbrt(n))
else: #DEFAULT EXCEPTIONAL CASE
        print("the number given has more than three digits")
```

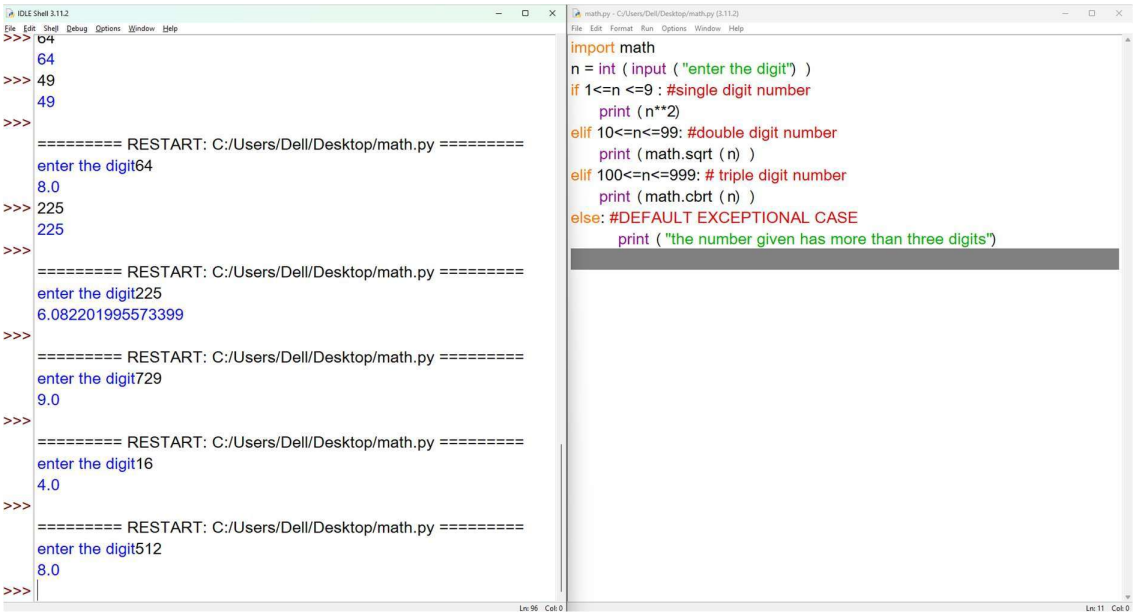

```
from datetime import datetime
def calculate_age(birthdate):
  birth_year=int(birthdate.split('-')[-1])
  current_year=datetime,now().year
  return current_year -birth_year
def convert_salary_to_dollars(salary_in_rupees):
  int_to_usd=0.012
  return salary_in_rupees* int_to_usd
birthdate=input()
salary_in_rupees=float(input())
age=calculate_age(birthdate)
salary_in_dollars=convert_salary_to_dollars(salary_in_rupees)
print(f"Age:{age}")
print(f"Salary in dollars:{salary_in_dollars:.2f}")
```

IDLE Shell 3.11.2

File Edit Shell Debug Options Window Help

```
  File "C:/Users/Dell/Desktop/math.py", line 8, in <module>
    print (reversed_num)
NameError: name 'reversed_num' is not defined
>>>
========= RESTART: C:/Users/Dell/Desktop/math.py =========
91
19
>>>
========= RESTART: C:/Users/Dell/Desktop/math.py =========
21
12
>>>
========= RESTART: C:/Users/Dell/Desktop/math.py =========
34
43
>>>
========= RESTART: C:/Users/Dell/Desktop/math.py =========
41
14
>>>
========= RESTART: C:/Users/Dell/Desktop/math.py =========
========= RESTART: C:/Users/Dell/Desktop/math.py =========76
Traceback (most recent call last):
  File "C:/Users/Dell/Desktop/math.py", line 1, in <module>
    num = int (input () )
ValueError: invalid literal for int () with base 10: '========= RESTAR
T: C:/Users/Dell/Desktop/math.py =========76'
```

Ln: 176 Col: 0

math.py - C:/Users/Dell/Desktop/math.py (3.11.2)

File Edit Format Run Options Window Help

```
num = int ( input () )

# Read the integer Input

# Reverse the digits of the number
reversed_num = int ( str ( num) [::-1])

# Print the reversed number
print ( reversed_num)
```

Ln: 10 Col: 0

IDLE Shell 3.11.2

File Edit Shell Debug Options Window Help

```
    12
    12 x 1 = 12
    12 x 2 = 24
    12 x 3 = 36
    12 x 4 = 48
    12 x 5 = 60
    12 x 6 = 72
    12 x 7 = 84
    12 x 8 = 96
    12 x 9 = 108
    12 x 10 = 120
>>> 13
    13
>>>
    ========= RESTART: C:/Users/Dell/Desktop/math.py =========
    13
    13 x 1 = 13
    13 x 2 = 26
    13 x 3 = 39
    13 x 4 = 52
    13 x 5 = 65
    13 x 6 = 78
    13 x 7 = 91
    13 x 8 = 104
    13 x 9 = 117
    13 x 10 = 130
>>>
```

Ln: 133 Col: 0

math.py - C:/Users/Dell/Desktop/math.py (3.11.2)

File Edit Format Run Options Window Help

```
num = int ( input () )
for i in range ( 1, 11) :
        print ( f" {num}  x  {i}  =  {num * i}  " )
```

Ln: 4 Col: