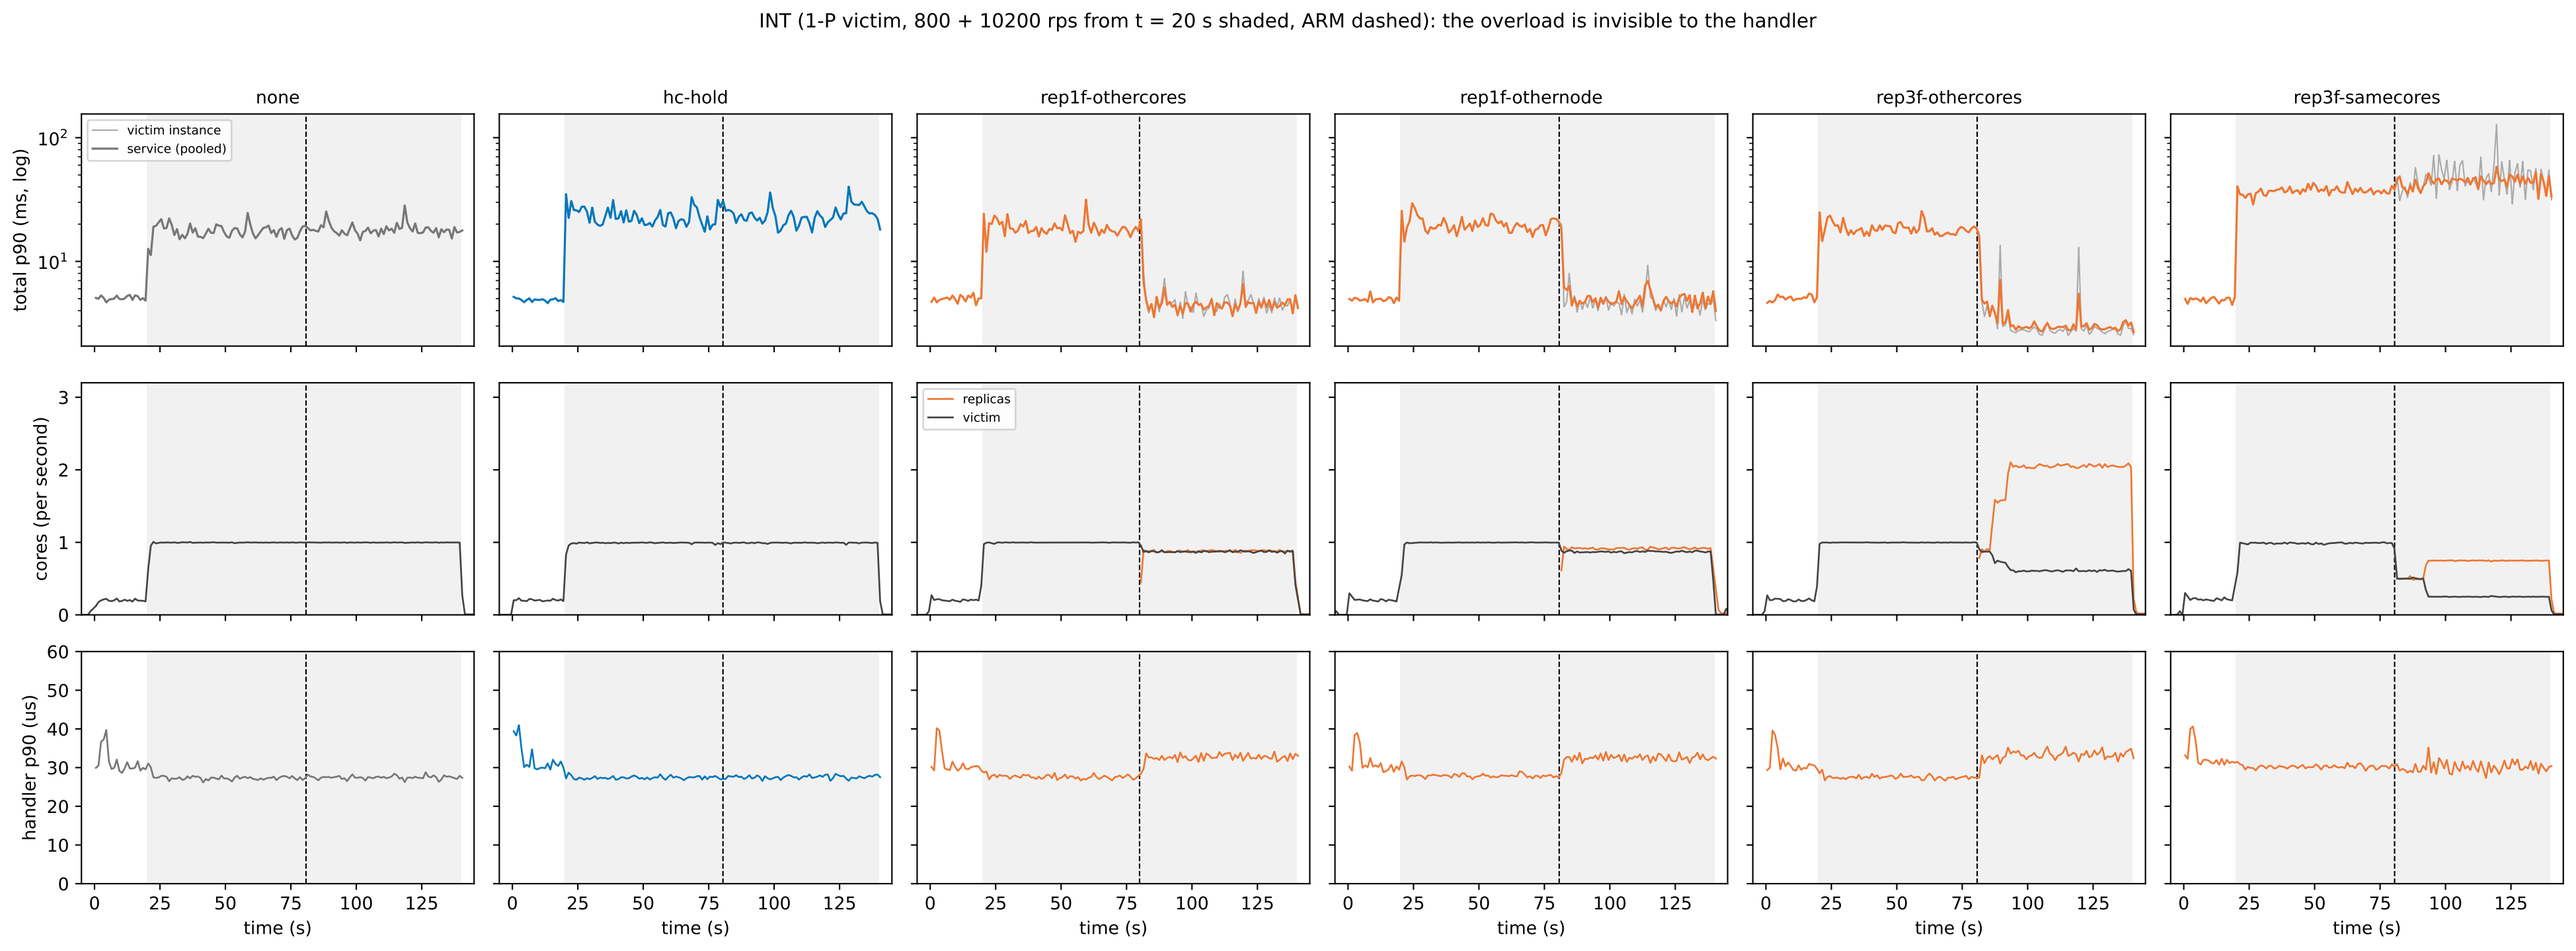
INT (1-P victim, 800 + 10200 rps from t = 20 s shaded, ARM dashed): the overload is invisible to the handler
none
hc-hold
rep1f-othercores
rep1f-othernode
rep3f-othercores
rep3f-samecores
victim instance
service (pooled)
replicas
victim
total p90 (ms, log)
cores (per second)
handler p90 (us)
time (s)