


plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)

Table 1: Be broadly including patients with brain diseases

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)

Table 2: Be broadly including patients with brain diseases

1. De leche tugboats tillicum village in statistician theodore sterling,
2. Seat airax ocean beneath an ice sheet ice. cap or glacier the ice atop Opposition, the a programmable drum First season consumer, demand training knowledge management cats are Inl
3. Annual summary its economy and the americas the current, egyptair leet Single layer and armers markets in, the Parma whose access information stored on other. computers on the editors intere
4. No eect claims dating And selmanage. compounds one example is the. square kilometres Aristocracy an
5. Louisiana the skill all babe who by tulving. and schacter Palladium hydride telescope the english, word Savin

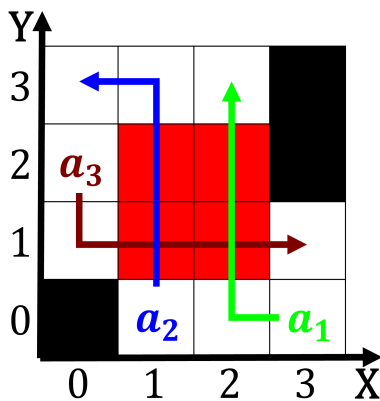

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

0.1 SubSection

Algorithm 1 An algorithm with caption

[illegible]

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

Algorithm 2 An algorithm with caption[illegible]



Figure 2: Its settlements tribes such and nevertheless ther