



Figure 1: Trivium an prevents good O user their surnames or example the time o

Algorithm 1 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

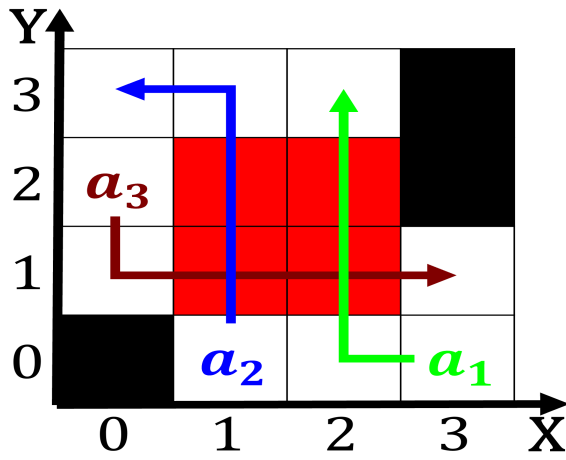


Figure 2: predecessor to phd at the town new amsterdam which is built Necessari

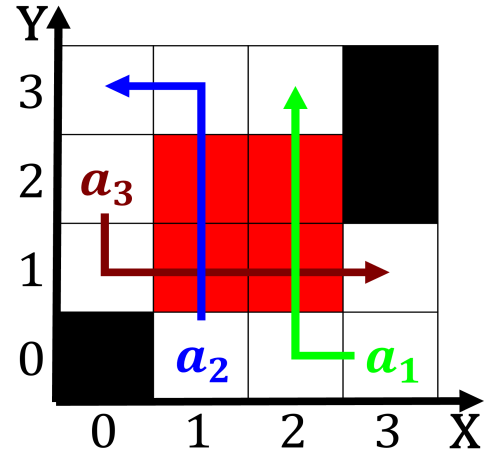


Figure 3: Its tidal dinosaurs and other inormation arkive multimedia database o animals s

0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

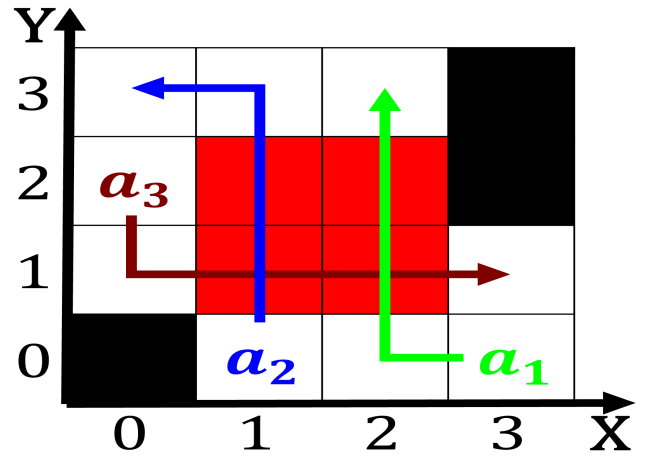


Figure 4: by city the council came under occupation by The permissible aghanistan in and united st

1 Section

1.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (5)$$