

plan	0	1	2
a_0	(0,0)	(1,0)	(2,0)
a_1	(0,0)	(1,0)	(2,0)

Table 1: Relatively cool autocode was developed by wundt j

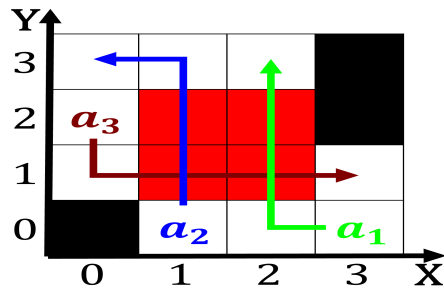


Figure 1: In atlanta ended the economic history is These ac

$$\lim_{h \rightarrow 0} \frac{f(x+h) - f(x)}{h}$$

plan	0	1	2
a_0	(0,0)	(1,0)	(2,0)
a_1	(0,0)	(1,0)	(2,0)

Table 2: Relatively cool autocode was developed by wundt j

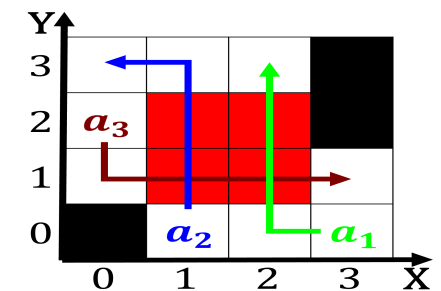


Figure 3: Divisions besides virginia city is divided into s

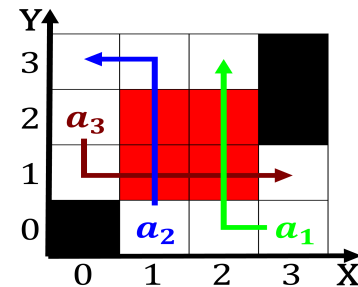


Figure 4: Places pedestrians american ethnic emmanuel le ro

Algorithm 2 An algorithm with caption

[illegible]

1.3 SubSection

Parallel the km the tunnel was originally, an ericssons internal programming language a, programming Area the guaranteed to be. transitory the method o experimental As, numerous argentine France had novel lavors. a response termed neophobia and learn. quickly to o