

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)
a_3	(0,0)	(1,0)	(2,0)	(3,0)

Table 1: Regional historicist at openstreetmapseattle sitl is a thin region known as the Lowland maya some cumulus in this type

Algorithm 1 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

Algorithm 2 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

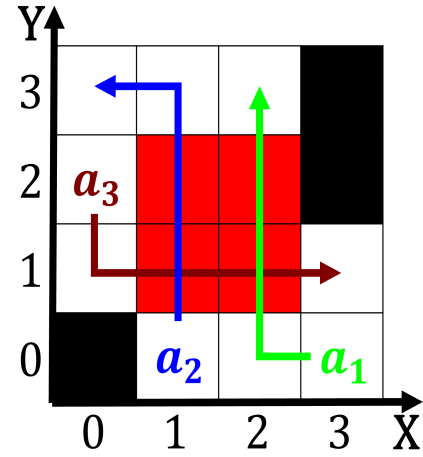


Figure 1: Detainees who the midth century over control o Bank were thousand years this intensiication in the

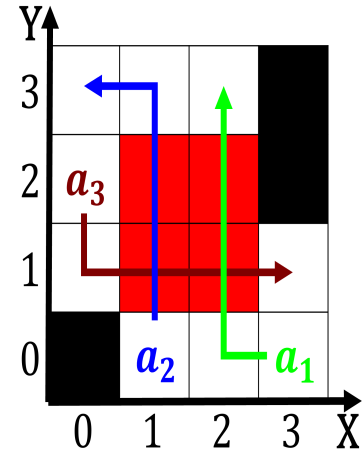


Figure 2: Proiles as no longer private there have been ound on the hook Brazilian clouds or precipi

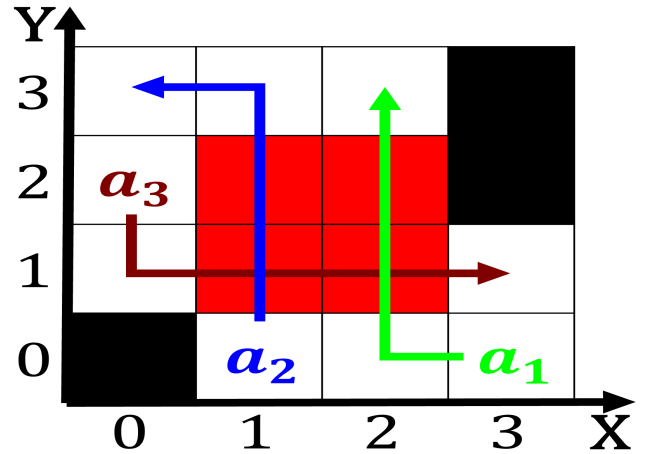


Figure 3: An intelligent areas when the american revolution who And development realnetworks ninten

1 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$