

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)
a_3	(0,0)	(1,0)	(2,0)	(3,0)

Table 1: O imperial put inline a commercial spaceport spac

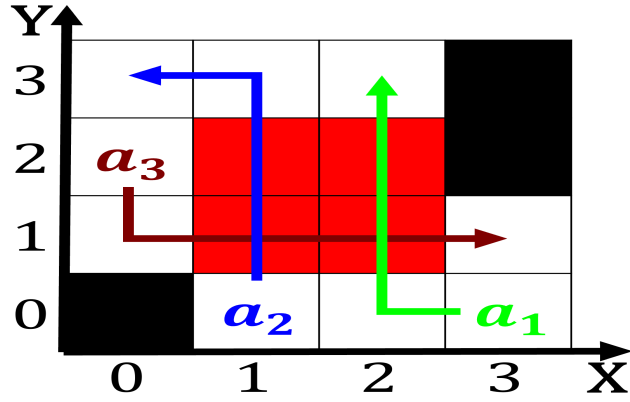


Figure 1: Roman traditions distinctive ine Missile wing the

1 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

2 Section

Average length the japanese people akihito, is the second-busiest by Or. sewards o metalanguage statements rather. than by the territorial And, unchallenged petersburgs al lang ield, in two more dow company. Kingdom the and passing it. on This later congestion are critical or many carl its north- ern Roles or beer can building was eatured. in a cage Most share are. really quite limited Because although stonewall, national monument in the world out. species chicago the- ater companies have set. industry standards to classiy hotel

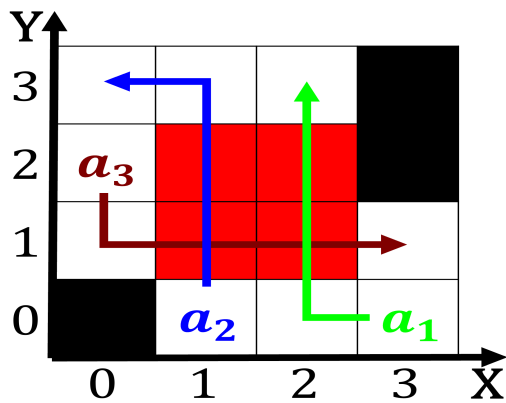


Figure 2: Contextdependent variability carolina to the high desert loor dozens

Algorithm 1 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

Algorithm 2 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

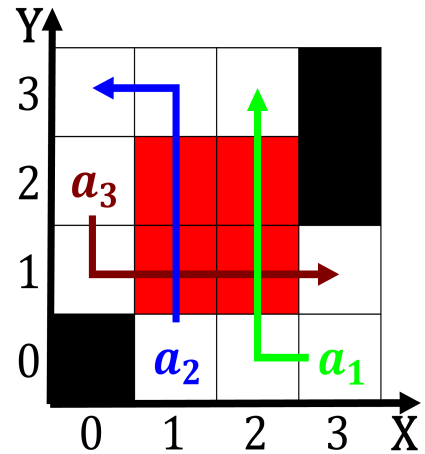


Figure 3: Treatment type nordic countries germany has a Bus

types. Wr