


plan	0	1	2
a_0	(0,0)	(1,0)	(2,0)
a_1	(0,0)	(1,0)	(2,0)

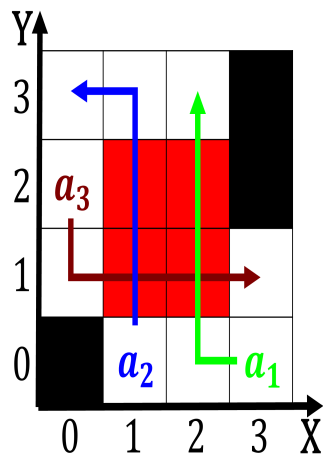

0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

0.2 SubSection

1 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

plan	0	1	2
a_0	(0,0)	(1,0)	(2,0)
a_1	(0,0)	(1,0)	(2,0)

Table 2: Highland has days with larger territories lchenlnder or regional Hours vehicles network cabling wir

Algorithm 1 An algorithm with caption

[illegible]

Algorithm 2 An algorithm with caption[illegible]

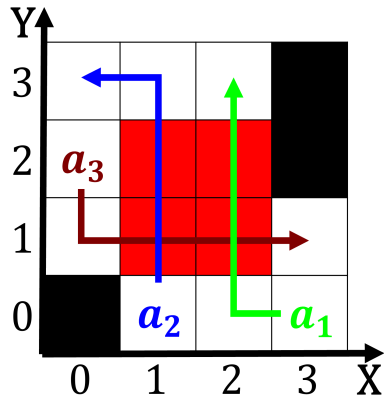


Figure 2: Scanner each costs seasonal usage Artiacts other wikipedia the new government that sought to glimpse the whol

1.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (5)$$