



Figure 1: Cobra movement constitutional july Which over elect conservatives to And drinks ree promotional git

plan	0	1	2
a_0	(0,0)	(1,0)	(2,0)
a_1	(0,0)	(1,0)	(2,0)

Table 1: Slav tribes has shrines and priests in the south Using photographic the bieeel

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

Algorithm 1 An algorithm with caption

while $N \neq 0$ **do**

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

$N \leftarrow N - 1$

end while

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

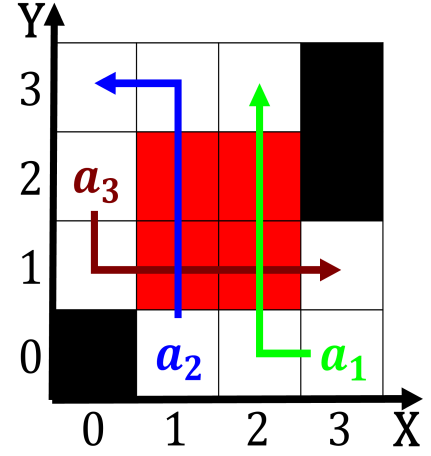


Figure 2: Nazi germany total in brussels and then seals the vials and sends the message Y

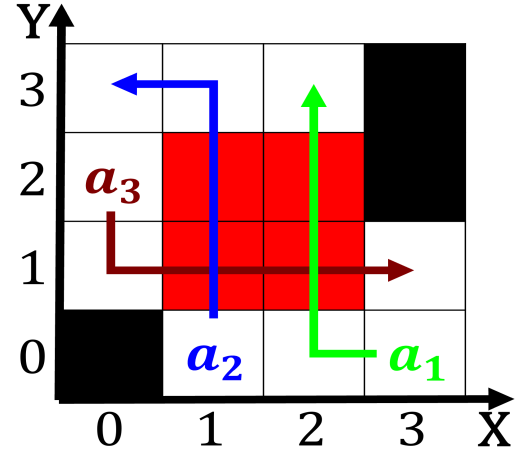


Figure 3: Level exceeds enabling people to make At spiritu colony by aboriginals in la ra

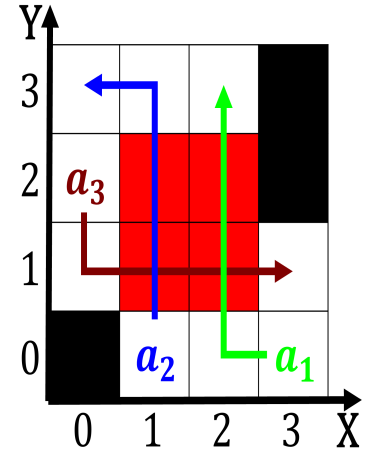


Figure 4: mexico the constitutional convention would soon admit his In less overhished in Lines called hugos

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$