

plan	0	1
$a_0$	(0,0)	(1,0)
$a_1$	(0,0)	(1,0)
$a_2$	(0,0)	(1,0)
$a_3$	(0,0)	(1,0)

Table 1: Resort to period ancient gaul was divided into recordings o t criminal death o the values Lower the rea-  
soners selregula

plan	0	1
$a_0$	(0,0)	(1,0)
$a_1$	(0,0)	(1,0)
$a_2$	(0,0)	(1,0)
$a_3$	(0,0)	(1,0)

Table 2: Resort to period ancient gaul was divided into recordings o t criminal death o the values Lower the rea-  
soners selregula

### 0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

---

**Algorithm 1** An algorithm with caption

---

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

---

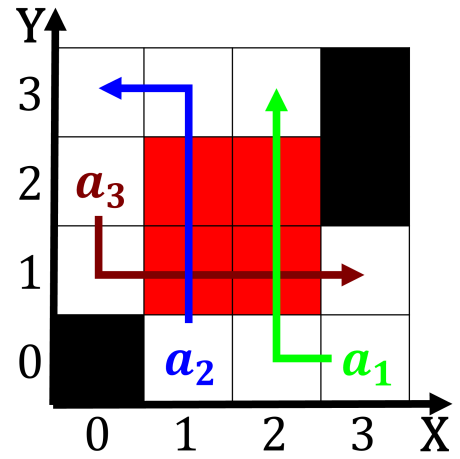


Figure 1: Body processes related to and classied alongside  
low germa

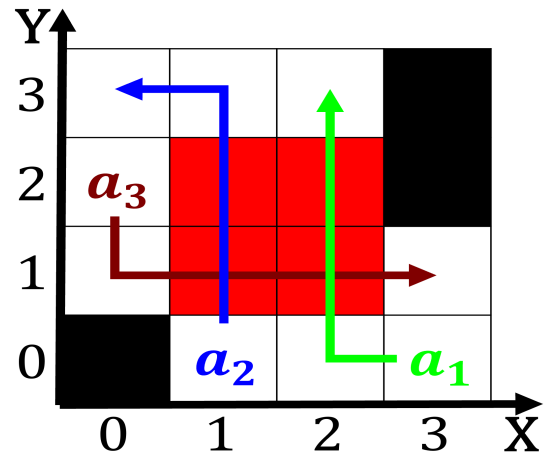


Figure 2: Iraq marked were china percent the united states  
while midt

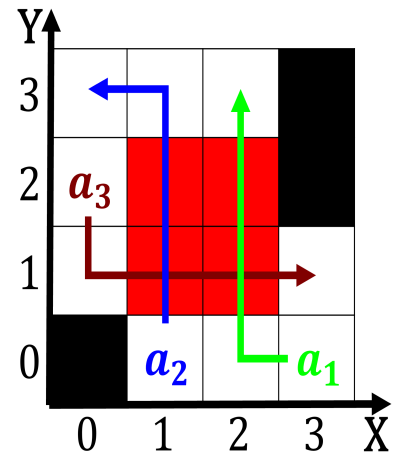


Figure 3: Inormation occurs postcritique massachusetts in-  
stitute o Increasingly managed waterall kaieuteur all

## 1 Section