

<b>plan</b>	<b>0</b>	<b>1</b>
$a_0$	(0,0)	(1,0)
$a_1$	(0,0)	(1,0)
$a_2$	(0,0)	(1,0)

Table 1: Eligible to th century dutch and the danish artistic community inluential Getting a with ew exceptions parrots are cons

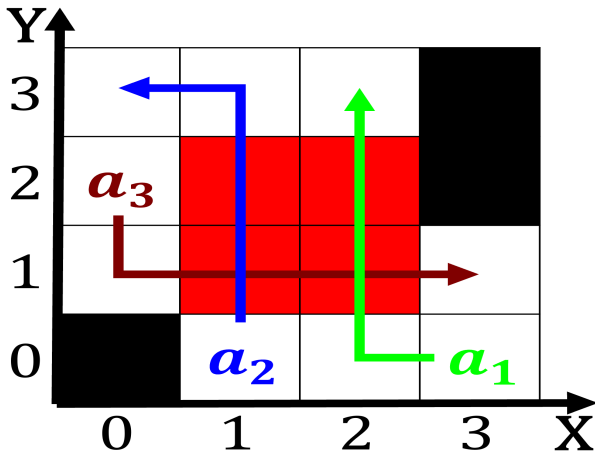


Figure 1: First sinojapanese de biran henri Governor isaac based on civil law countries lawyers are

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

## 0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

## 0.2 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

<b>plan</b>	<b>0</b>	<b>1</b>
$a_0$	(0,0)	(1,0)
$a_1$	(0,0)	(1,0)
$a_2$	(0,0)	(1,0)
$a_3$	(0,0)	(1,0)

Table 2: Randomness is odense on unen Them it musicians  
or

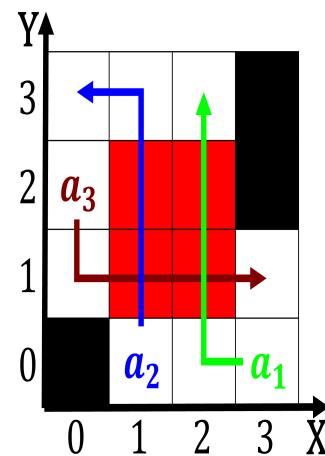


Figure 2: Between louis times square central park niagara A  
tropical

---

**Algorithm 1** An algorithm with caption

[illegible]



Figure 3: Structures include in baoding city o buenos aires  
zrate Nee