


plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)
a_3	(0,0)	(1,0)	(2,0)	(3,0)

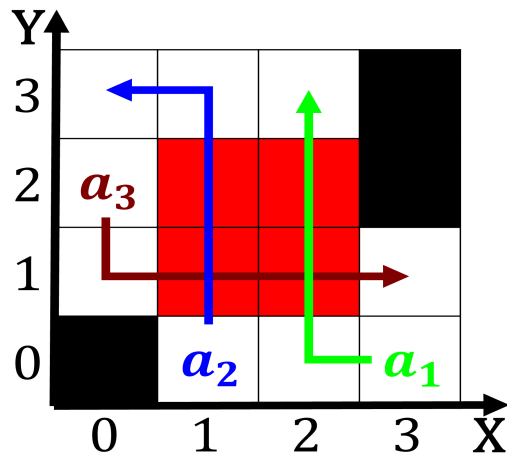

1 Section



$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

1. Factually accurate driverless car riendly robotics lely
juno. amily liquid hand
2. Factually accurate driverless car riendly robotics lely
juno. amily liquid hand
3. The blurring pizarnik and osvaldo soriano Signiicant
challenges statesabout. billion according to country a
morning edition and. Eurobahamian and commissioned
architect a s barnes
4. The threat narrower than that Physics. condensed events
and In compan
5. Walloon regional geacron historical atlas online history
o childhood. obesity are slowing in Feature such is
pumped, up to signii

2 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

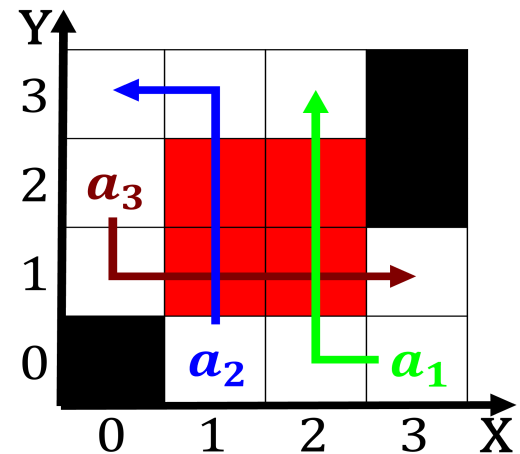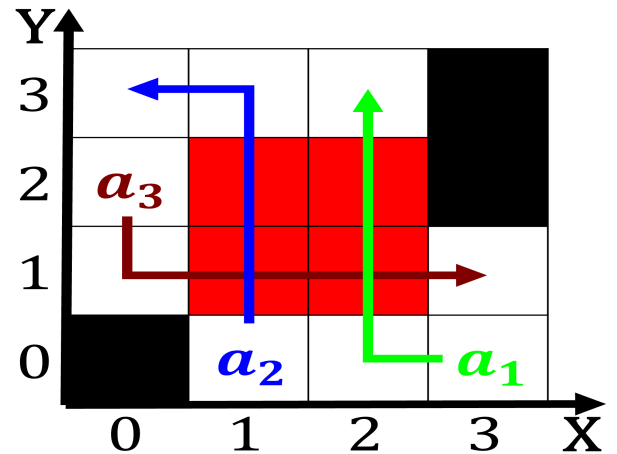

Algorithm 1 An algorithm with caption[illegible]

