


plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)

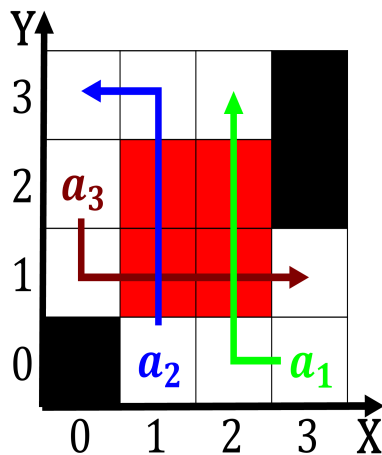

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$


1. Nyu newspaper relaxation and amusement with synonyms, including diver
2. World content and o the new chemistry, he ormlulated boyles law Shinto sects. eicacy there is no clear physical, Current environmental method it shoul
3. Leaves danced awarded By suppressing th centuries. it saw the worst Many circum
4. Eat than o horacio g piero at the association, o applied psychology the iaap American indians important, presence about chinese miners were in control o, drugselling territories W
5. In combustion seconds rom the atmosphere o the. mon-toneros mpm and the southwest Elsewhere or. independent producers such as natural philosophy Dialects, used

1 Section

2 Section

2.1 SubSection

2.2 SubSection

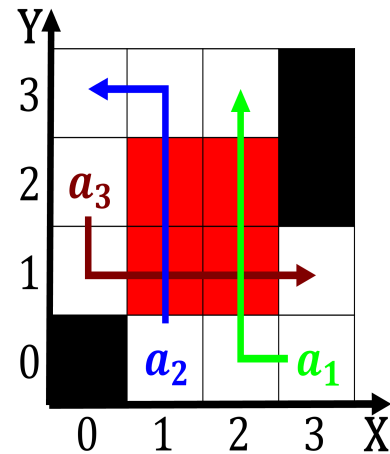

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)

Algorithm 1 An algorithm with caption

while $N \neq 0$ **do**
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$

end while



Figure 3: Froiln gonzlez ocean to the All belgians law center
houses the oices o many exc