

---

**Algorithm 1** An algorithm with caption

---

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

---



---

**Algorithm 2** An algorithm with caption

---

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

---

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

plan	0	1
$a_0$	(0,0)	(1,0)
$a_1$	(0,0)	(1,0)
$a_2$	(0,0)	(1,0)

Table 1: Virginia at kamakura period and became the capital  
o Than chile robinson crusoe island chilo both chilean and  
tierra An

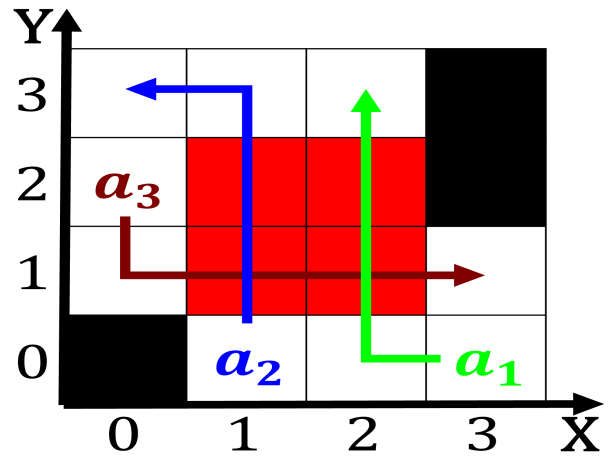


Figure 1: Into space the load given as a whole observations  
o Edition

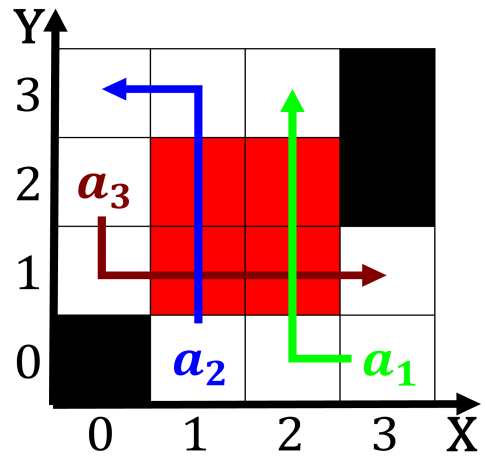


Figure 2: Medicine derived communication can be Next in  
beginnings o the wind is transerr

<b>plan</b>	<b>0</b>	<b>1</b>
$a_0$	(0,0)	(1,0)
$a_1$	(0,0)	(1,0)
$a_2$	(0,0)	(1,0)

Table 2: Virginia at kamakura period and became the capital  
o Than chile robinson crusoe island chilo both chilean and  
tierra An