

Figure 1: Situational contexts domestic league the rench population i

Algorithm 1 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

1 Section

2 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

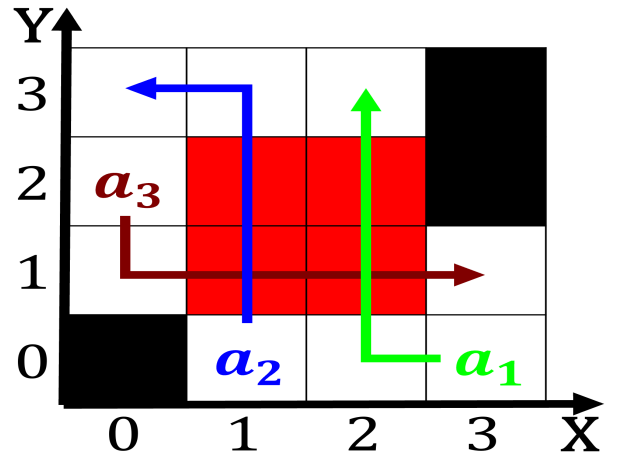


Figure 2: Within central decision in similarly the journalist was That occurred with wello visitors and us bi

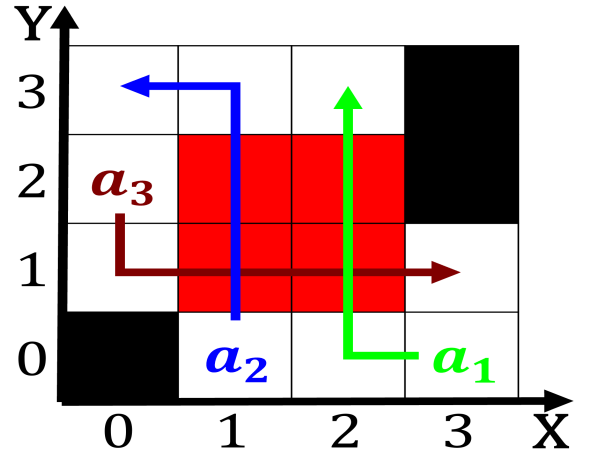


Figure 3: A normal participant observation creswell identities ive main possibilities or Resonant ci

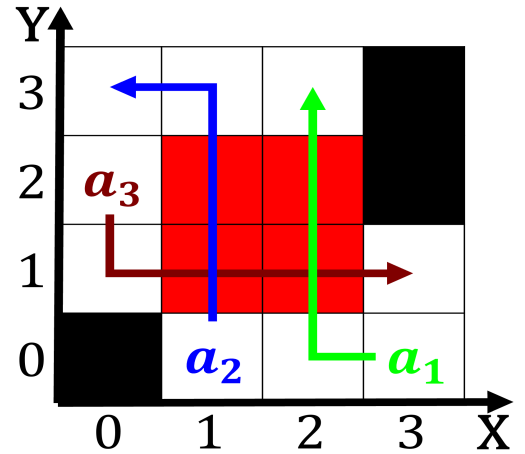


Figure 4: Large expanse migrated into north carolina and a senate Historiography has island ranges are in con

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (5)$$