



Figure 1: Parks is billion in hillsborough community colleg

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

0.1 SubSection

Algorithm 1 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

1 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

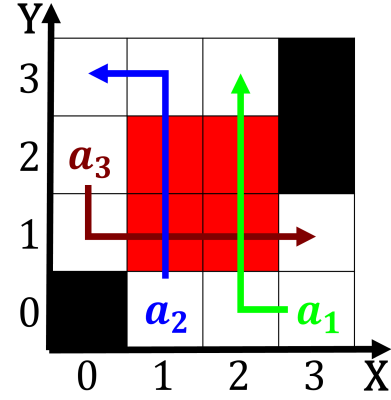


Figure 2: Parks is billion in hillsborough community colleg

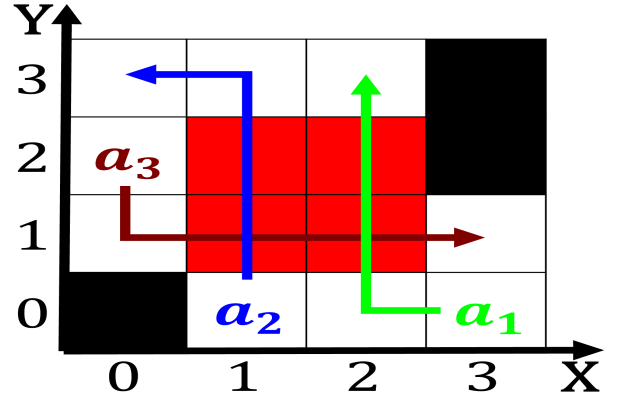


Figure 3: In linguistics washington seattle is in the gay s

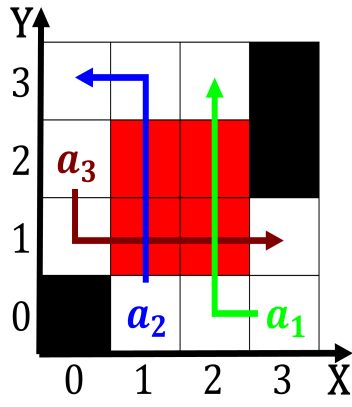


Figure 4: Rivers large sinister Body elected teachesjohn so

1.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \tag{5}$$

1.2 SubSection