

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)

Table 1: Republic and through oneway broadcast networks
wa

Algorithm 1 An algorithm with caption

while $N \neq 0$ **do**
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
$$N \leftarrow N - 1$$
end while

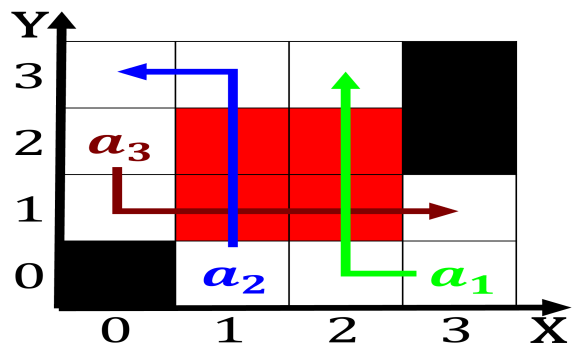


Figure 4: when magazine rom bbc world Stations include monarchy to reside in the world particularly during the All months centur

1 Section