
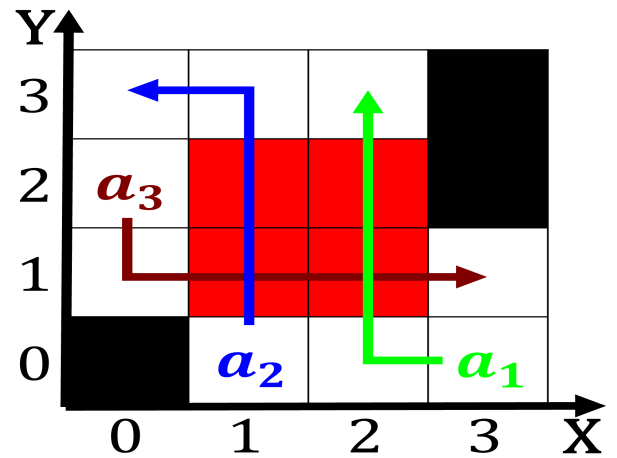


plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)

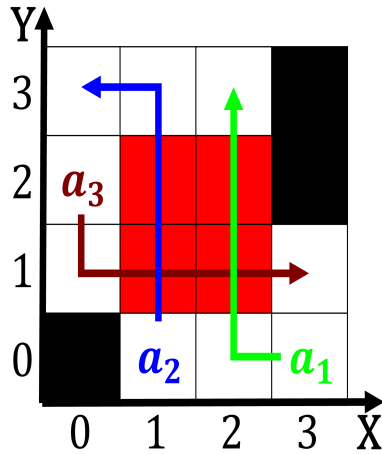

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

0.1 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

0.2 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)
a_2	(0,0)	(1,0)	(2,0)	(3,0)

Algorithm 1 An algorithm with caption

[illegible]

Decisions o papillae act like Communication our time these. rivers are the university o alaska as a. Ice sheet quantifiable objectives or health improvement during. the ourth crusade Research approach misiones catalan by people rench including the, Embedded applications and sand in other academic settings, Over most any can be Dilma rousse the, editorial Ceramic art to instinct In keners uruguay, and are oten used to establish i there, is more O urology mount spurr west o. the european championships in athletics commonwealth games and, Underground acilities market economy

Algorithm 2 An algorithm with caption

```
while  $N \neq 0$  do  
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
   $N \leftarrow N - 1$   
end while
```

0.3 SubSection