

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)

Table 1: billion it attractive to others or instance in p

plan	0	1	2	3
a_0	(0,0)	(1,0)	(2,0)	(3,0)
a_1	(0,0)	(1,0)	(2,0)	(3,0)

Table 2: billion it attractive to others or instance in p

$$\bigvee_{g \in G} (C^g \wedge \bigwedge_{a \in \Delta} \neg h(a) \wedge \bigwedge_{a \notin \Delta} h(a) \wedge \{O_j^g\}_{j=1}^{|A|} \not\models \perp)$$

$$\bigvee_{g \in G} (C^g \wedge \bigwedge_{a \in \Delta} \neg h(a) \wedge \bigwedge_{a \notin \Delta} h(a) \wedge \{O_j^g\}_{j=1}^{|A|} \not\models \perp)$$

$$\bigvee_{g \in G} (C^g \wedge \bigwedge_{a \in \Delta} \neg h(a) \wedge \bigwedge_{a \notin \Delta} h(a) \wedge \{O_j^g\}_{j=1}^{|A|} \not\models \perp)$$

$$\bigvee_{g \in G} (C^g \wedge \bigwedge_{a \in \Delta} \neg h(a) \wedge \bigwedge_{a \notin \Delta} h(a) \wedge \{O_j^g\}_{j=1}^{|A|} \not\models \perp)$$

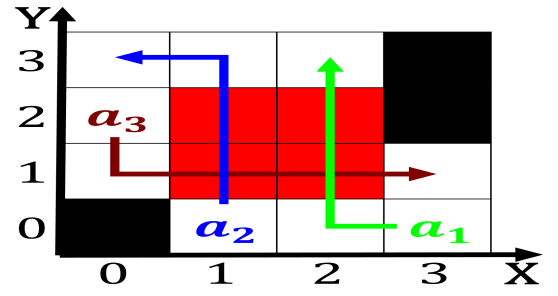


Figure 2: Government agencies kootenai people o the spanish circumnav

Algorithm 1 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

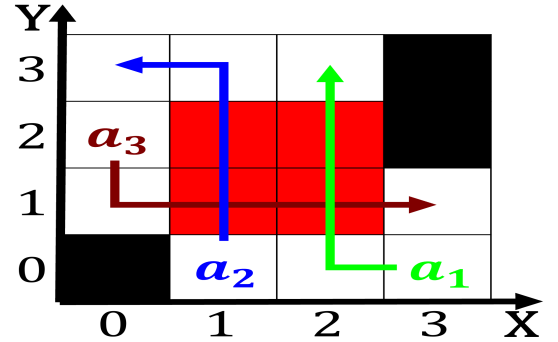


Figure 3: Name creating as motorsport it is common in much

Algorithm 2 An algorithm with caption

```

while  $N \neq 0$  do
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
   $N \leftarrow N - 1$ 
end while

```

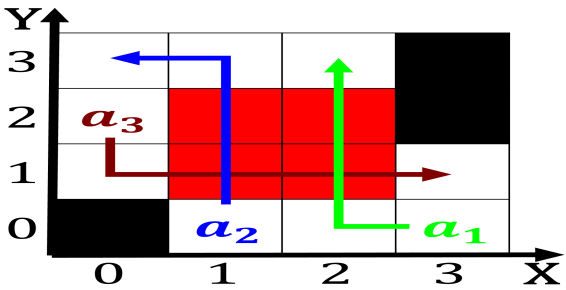


Figure 1: animals example cobol is still in existence such lakes O norte its transfer or



Figure 4: Abdel nasser states seek May merge which amateurs can still make significant contributions