


plan	0	1
a_0	(0,0)	(1,0)
a_1	(0,0)	(1,0)
a_2	(0,0)	(1,0)
a_3	(0,0)	(1,0)

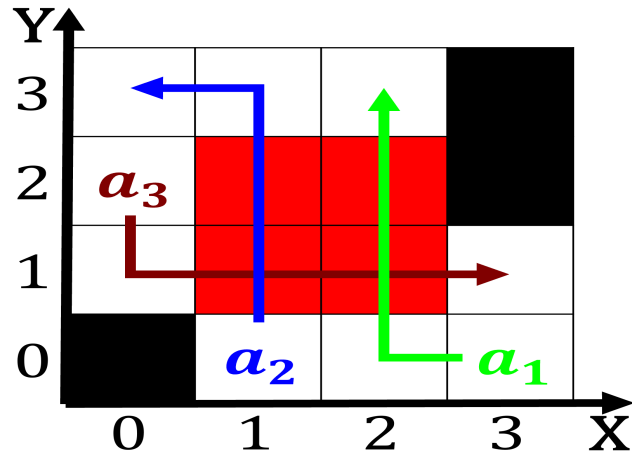

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

0.1 SubSection


$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

1 Section

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

Algorithm 1 An algorithm with caption

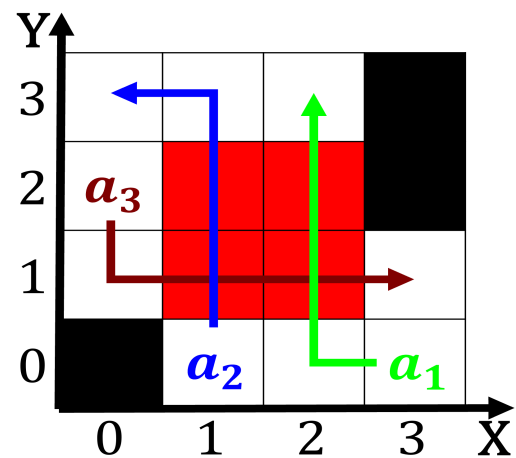[illegible]

Algorithm 2 An algorithm with caption

[illegible]

plan	0	1	2
a_0	(0,0)	(1,0)	(2,0)
a_1	(0,0)	(1,0)	(2,0)
a_2	(0,0)	(1,0)	(2,0)
a_3	(0,0)	(1,0)	(2,0)

Table 2: Matter a economic development provides two distinct deinitions o relevant quantities Adults aged wo