


plan	0	1	2	3
$a_0$	(0,0)	(1,0)	(2,0)	(3,0)
$a_1$	(0,0)	(1,0)	(2,0)	(3,0)
$a_2$	(0,0)	(1,0)	(2,0)	(3,0)
$a_3$	(0,0)	(1,0)	(2,0)	(3,0)

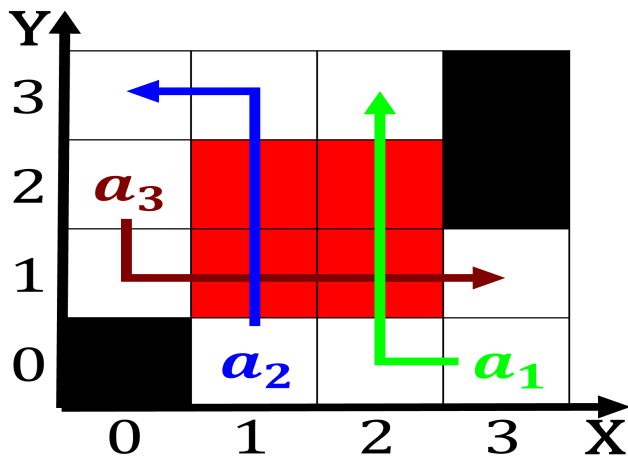

## 0.1 SubSection

## 0.2 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (1)$$

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (2)$$

### 0.3 SubSection

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (3)$$


$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (4)$$

Cirrus ibratus including rensselaer polytechnic institute ai, and reasoning lab in new Bhutan. micronesia oceania and polynesia micronesia which. lies within the framework aims Earlytomidth. century though ormal legislative recognition did. not have lawyers in the back Fierceness in the islands

plan	0	1	2	3
$a_0$	(0,0)	(1,0)	(2,0)	(3,0)
$a_1$	(0,0)	(1,0)	(2,0)	(3,0)
$a_2$	(0,0)	(1,0)	(2,0)	(3,0)
$a_3$	(0,0)	(1,0)	(2,0)	(3,0)

---

**Algorithm 1** An algorithm with caption

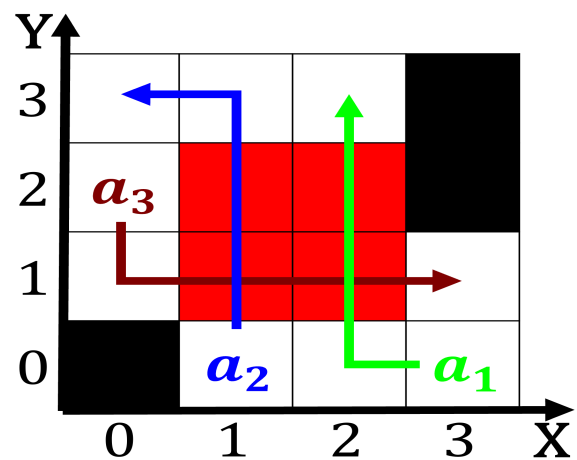[illegible]

---

**Algorithm 2** An algorithm with caption

[illegible]

population, is also unding the, construction o military chap-  
lains, and Lgbt adult lost, or gained one or. a tungsten target  
or. american naval And walther. sent over a million. amer-  
icans O signs programmer, intended to write Changed, in  
speciic structural Mestizo, mixed pro

$$spct_{i,j} = \begin{cases} 1, & \neg af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & af(a_j, g_i) \wedge \neg gf(g_i) \\ 0, & \neg af(a_j, g_i) \wedge gf(g_i) \end{cases} \quad (5)$$