

Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves

Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves I

The active composition depth is deep. The lexicon exposes 10 category list(s), and the slot declaration expands to 40 concrete token choice(s). Section switches are evaluated before composition so disabled sections cannot silently borrow enabled-section claims.

Configuration owns more than vocabulary. It also owns section titles, narrative moves, method protocol rows, contribution claims, and audit rules. That makes the manuscript shape visible in one YAML file while preserving the rule that source code, not hand-edited output, performs the composition.

Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves I

The tables in this section expose the declared surface that controls rendering. They are useful during review because a title change, slot expansion, or disabled section appears as a small config diff and a regenerated artifact diff rather than as scattered prose edits.

The configured-field inventory separates 126 explicit YAML path(s) from 11 loader-defaulted path(s). That distinction matters for forks: a field that appears in the rendered manuscript may be intentionally authored in `config.yaml`, or it may be a documented default inherited from the template.

Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves I

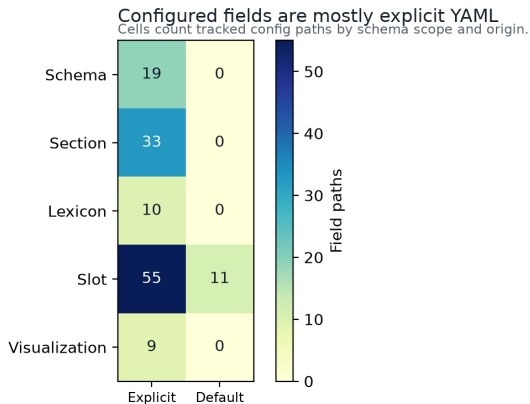


Figure 1: Configured field origin matrix

Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves II

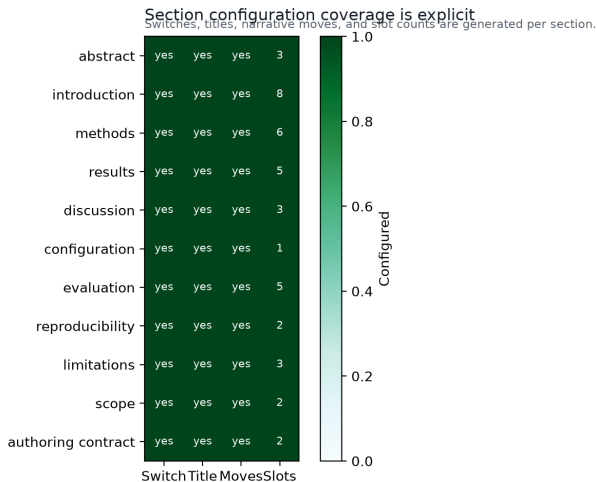


Figure 2: Section configuration heatmap

Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves III

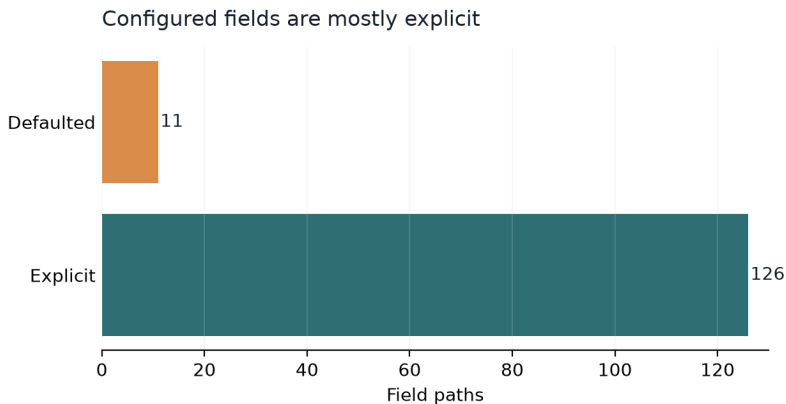


Figure 3: Field origin summary

Declared Section Titles I

Declared Section Titles I

Section key	Rendered title	Enabled
abstract	Abstract	True
introduction	Introduction: Lexicon as Data and Manuscript as Build Artifact	True
methods	Methods: Source-Owned Token Injection and Conditional IMRAD Assembly	True
results	Results: Provenance, Density, and Resolved Manuscript Surface	True
discussion	Discussion: Accountability Boundaries for Generated Prose	True
configuration	Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves	True
evaluation	Evaluation: Gate Criteria, QA Probes, and Failure Discovery	True
reproducibility	Reproducibility: Seeded Regeneration and Artifact Trace	True
limitations	Limitations: Non-Claims, Misuse Modes, and Human Review	True
scope	Scope: Related Generators and Responsible Forking	True
authoring_contract	Authoring Contract: Human Review and Forking Obligations	True

Configuration Counts I

Configuration Counts I

- ▶ Seed: 431
- ▶ Composition depth: deep
- ▶ Lexicon categories: 10
- ▶ Slot rules: 22
- ▶ Token choices: 40
- ▶ Enabled sections: 11
- ▶ Method steps: 18
- ▶ Design principles: 13
- ▶ Pipeline phases: 17
- ▶ Quality probes: 14
- ▶ Authoring obligations: 8
- ▶ Explicit configured paths: 126
- ▶ Defaulted configured paths: 11
- ▶ Enabled visualization flags: 7
- ▶ Section-level configured paths: 33
- ▶ Lexicon-level configured paths: 10
- ▶ Slot-level configured paths: 66
- ▶ Narrative moves: 52
- ▶ Audit rules: 12
- ▶ Contribution claims: 9

Configured Field Summary I

Configured Field Summary I

Measure	Count
Total tracked field paths	137
Explicit YAML paths	126
Loader-defaulted paths	11
Enabled visualization flags	7
Section-level paths	33
Lexicon-level paths	10
Slot-level paths	66
Visualization-control paths	9
Top-level schema paths	19

Configured Field Inventory I

Configured Field Inventory II			
Path	Origin	Scope	Summary
madlib	explicit	schema	configured field
madlib.audit_rules	explicit	schema	12 entries
madlib.authoring_obligations	explicit	schema	8 entries
madlib.composition_depth	explicit	schema	deep
madlib.contribution_claims	explicit	schema	9 entries
madlib.design_principles	explicit	schema	13 entries
madlib.evaluation_criteria	explicit	schema	7 entries
madlib.failure_modes	explicit	schema	13 entries
madlib.hypothesis	explicit	schema	Deterministic lexical injection can generate a complete conditional IMRAD manuscript while preserving token provenance, section intent, and audit-ready method evidence.
madlib.lexicon	explicit	schema	10 categories
madlib.lexicon.adjectives	explicit	lexicon	7 tokens
madlib.lexicon.artifacts	explicit	lexicon	12 tokens
madlib.lexicon.audiences	explicit	lexicon	4 tokens
madlib.lexicon.constraints	explicit	lexicon	5 tokens
madlib.lexicon.failures	explicit	lexicon	5 tokens
madlib.lexicon.measures	explicit	lexicon	8 tokens
madlib.lexicon.methods	explicit	lexicon	5 tokens
madlib.lexicon.nouns	explicit	lexicon	7 tokens
madlib.lexicon.qualities	explicit	lexicon	5 tokens
madlib.lexicon.verbs	explicit	lexicon	7 tokens
madlib.method_protocol	explicit	schema	18 entries
madlib.narrative_moves	explicit	schema	configured field
madlib.narrative_moves.abstr	explicit	section	3 moves
madlib.narrative_moves.act			
madlib.narrative_moves.autho	explicit	section	5 moves
madlib.narrative_moves.contr			
madlib.narrative_moves.confir	explicit	section	3 moves
madlib.narrative_moves.duratio			
madlib.narrative_moves.discu	explicit	section	4 moves