Results: Provenance, Density, and Resolved Manuscript Surface

Results: Provenance, Density, and Resolved Manuscript Surface I

The generated plan enables 11 of 11 manuscript sections and fills 40 token choice(s). Category density is adjectives: 2, artifacts: 8, audiences: 4, constraints: 3, failures: 3, measures: 6, methods: 1, nouns: 5, qualities: 3, verbs: 5. The result figures are generated from the same token plan that writes the inventory table, so visual and tabular claims share one source.

The configured results moves are report token density, show resolved section coverage, bind every manuscript token to provenance, and connect the figure and inventory to the same plan. The important result is therefore not a surprising word choice; it is the survival of traceability through a complete render path. Each token row records the variable, category, selected value, section, and config pointer that produced it.

Results: Provenance, Density, and Resolved Manuscript Surface I

The resolved manuscript also demonstrates the intended failure boundary. If a manuscript placeholder is added without a corresponding variable, the project test suite detects it. If a figure is referenced without registry support, the output validator reports it. If a generated number lacks evidence support, the evidence registry gate reports it before the copied output stage packages deliverables.

Visualization is enabled for configured_field_matrix, section_configuration_heatmap, field_origin_summary, token_injection_flow, section_token_allocation, provenance_trace_map, quality_gate_matrix. The configured-field figures are generated from the same explicit/default path inventory written to JSON; the pipeline, allocation, provenance, and gate figures are generated from the same token plan and QA schema.

Results: Provenance, Density, and Resolved Manuscript Surface I

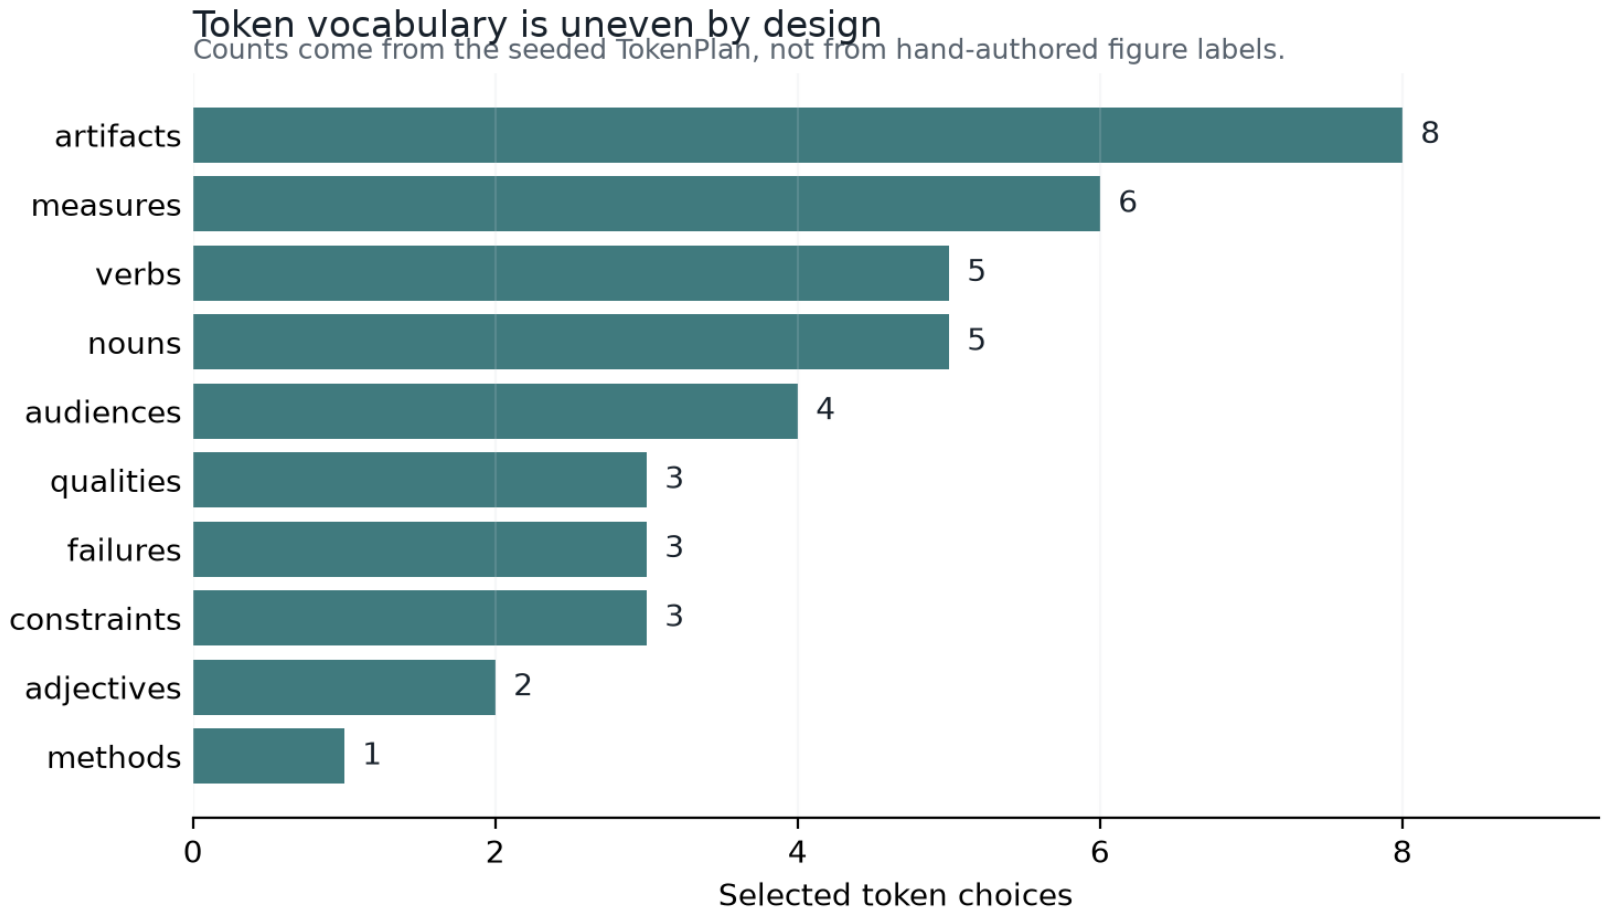


Figure 2: Token category density

Results: Provenance, Density, and Resolved Manuscript Surface I


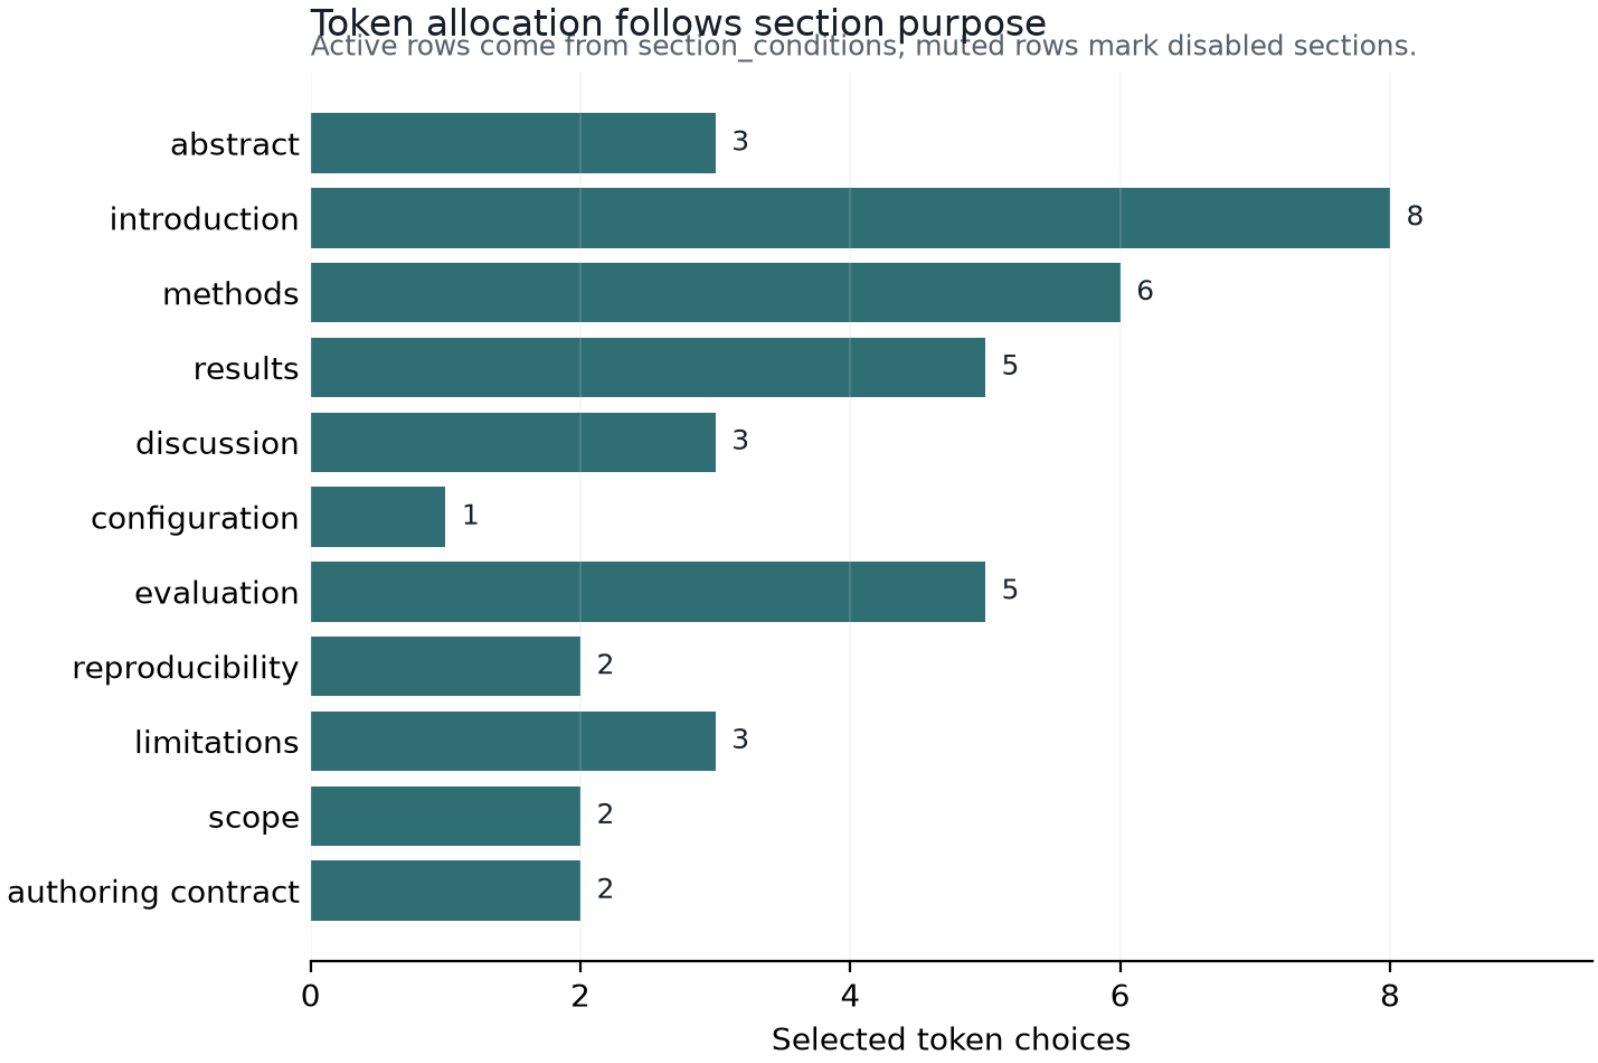


Figure 3: Section token allocation

Results: Provenance, Density, and Resolved Manuscript Surface I

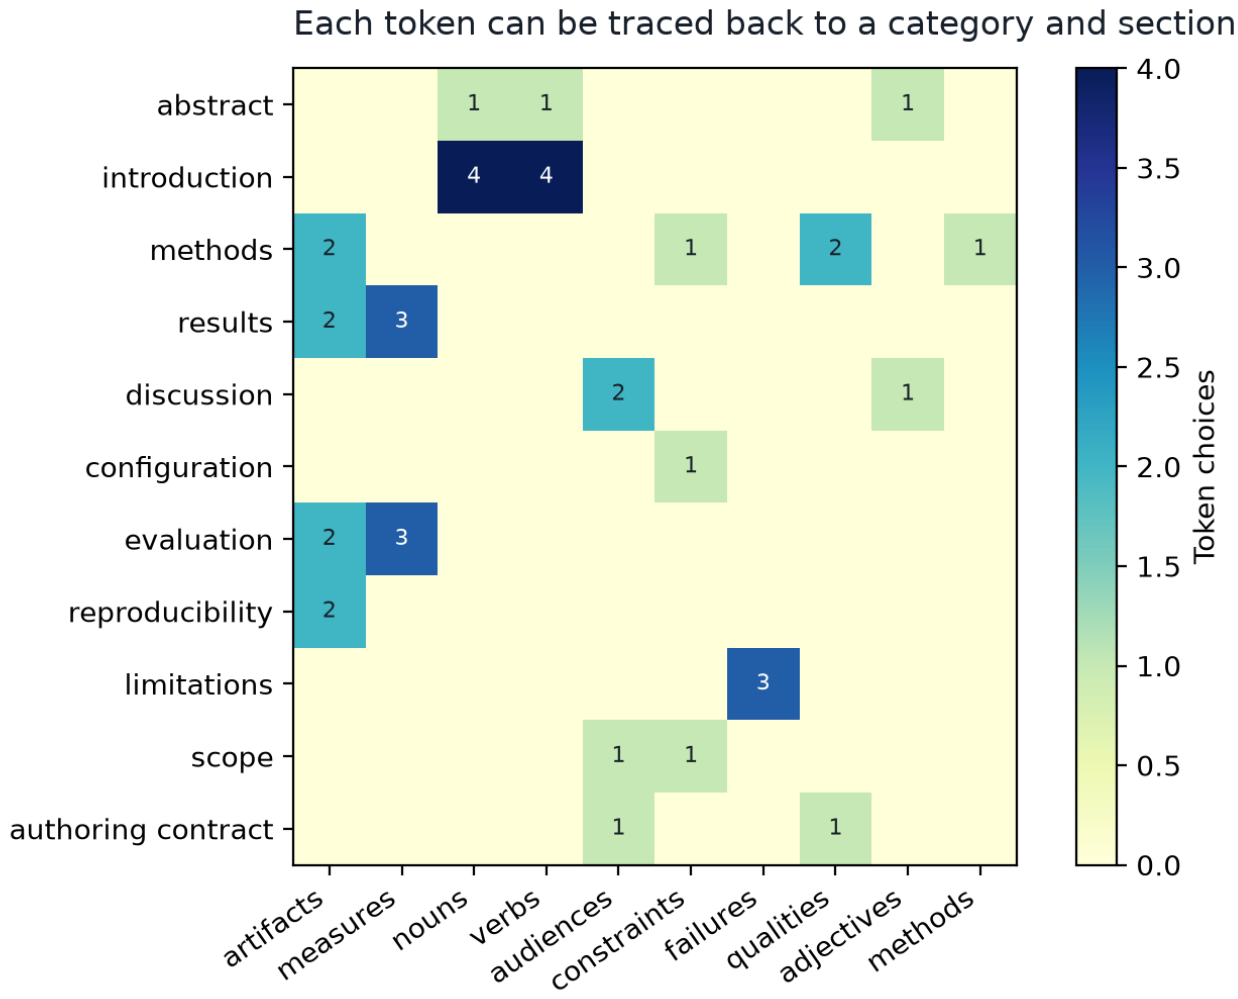

Results: Provenance, Density, and Resolved Manuscript Surface I

Figure 4: Provenance trace map

Token Inventory I

Variable	Category	Value	Section	Source
STUDY_ADJECTIVE	adjectives	reviewable	abstract	manuscript/config.yaml#madlib.lexicon.adjectives[5]
STUDY_NOUN	nouns	pipeline	abstract	manuscript/config.yaml#madlib.lexicon.nouns[4]
STUDY_VERB	verbs	hydrate	abstract	manuscript/config.yaml#madlib.lexicon.verbs[1]
INTRO_NOUNS_1	nouns	protocol	introduction	manuscript/config.yaml#madlib.lexicon.nouns[5]
INTRO_NOUNS_2	nouns	section	introduction	manuscript/config.yaml#madlib.lexicon.nouns[3]
INTRO_NOUNS_3	nouns	lexicon	introduction	manuscript/config.yaml#madlib.lexicon.nouns[2]
INTRO_NOUNS_4	nouns	artifact	introduction	manuscript/config.yaml#madlib.lexicon.nouns[6]
INTRO_VERBS_1	verbs	condition	introduction	manuscript/config.yaml#madlib.lexicon.verbs[3]

Token Inventory I

Variable	Category	Value	Section	Source
INTRO_VERBS_2	verbs	bind	introduction	manuscript/config.yaml#madlib.lexicon.verbs[6]
INTRO_VERBS_3	verbs	bind	introduction	manuscript/config.yaml#madlib.lexicon.verbs[6]
INTRO_VERBS_4	verbs	compose	introduction	manuscript/config.yaml#madlib.lexicon.verbs[0]
METHOD_NAME	methods	conditional section hydration	methods	manuscript/config.yaml#madlib.lexicon.methods[3]
METHOD_CONSTRAINT	constraints	publication claims stay local until release	methods	manuscript/config.yaml#madlib.lexicon.constraints[3]
METHOD_ARTIFACT_1	artifacts	token-injection flow	methods	manuscript/config.yaml#madlib.lexicon.artifacts[6]
METHOD_ARTIFACT_2	artifacts	quality-gate matrix	methods	manuscript/config.yaml#madlib.lexicon.artifacts[9]
METHOD_QUALITY_1	qualities	claim humility	methods	manuscript/config.yaml#madlib.lexicon.qualities[4]

Token Inventory I

Variable	Category	Value	Section	Source
METHOD_QUALITY_2	qualities	render readiness	methods	manuscript/config.yaml#madlib.lexicon.qualities[3]
RESULT_MEASURE_1	measures	provenance coverage	results	manuscript/config.yaml#madlib.lexicon.measures[3]
RESULT_MEASURE_2	measures	evidence registry cleanliness	results	manuscript/config.yaml#madlib.lexicon.measures[6]
RESULT_MEASURE_3	measures	category density	results	manuscript/config.yaml#madlib.lexicon.measures[2]
RESULT_ARTIFACT_1	artifacts	configured-field figures	results	manuscript/config.yaml#madlib.lexicon.artifacts[10]
RESULT_ARTIFACT_2	artifacts	token inventory	results	manuscript/config.yaml#madlib.lexicon.artifacts[0]
DISCUSSION_ADJECTIVE	adjectives	auditable	discussion	manuscript/config.yaml#madlib.lexicon.adjectives[0]
DISCUSSION_AUDIENCE_1	audiences	pipeline maintainers	discussion	manuscript/config.yaml#madlib.lexicon.audiences[2]

Token Inventory I

Variable	Category	Value	Section	Source
DISCUSSION_AUDIENCE_2	audiences	research educators	discussion	manuscript/config.yaml#madlib.lexicon.audiences[3]
CONFIG_CONSTRAINT	constraints	disabled sections retain explicit traceability	configuration	manuscript/config.yaml#madlib.lexicon.constraints[2]
EVALUATION_MEASURE_1	measures	copied output readiness	evaluation	manuscript/config.yaml#madlib.lexicon.measures[7]
EVALUATION_MEASURE_2	measures	figure registry completeness	evaluation	manuscript/config.yaml#madlib.lexicon.measures[5]
EVALUATION_MEASURE_3	measures	category density	evaluation	manuscript/config.yaml#madlib.lexicon.measures[2]
EVALUATION_ARTIFACT_1	artifacts	manuscript variable map	evaluation	manuscript/config.yaml#madlib.lexicon.artifacts[3]
EVALUATION_ARTIFACT_2	artifacts	provenance trace map	evaluation	manuscript/config.yaml#madlib.lexicon.artifacts[8]
REPRODUCIBILITY_ARTIFACT_1	artifacts	section plan	reproducibility	manuscript/config.yaml#madlib.lexicon.artifacts[1]

Token Inventory I

Variable	Category	Value	Section	Source
REPRODUCIBILITY_ARTIFACT_2	artifacts	manuscript variable map	reproducibility	manuscript/config.yaml#madlib.lexicon.artifacts[3]
LIMITATION_FAILURE_1	failures	domain misuse	limitations	manuscript/config.yaml#madlib.lexicon.failures[4]
LIMITATION_FAILURE_2	failures	overclaimed generated prose	limitations	manuscript/config.yaml#madlib.lexicon.failures[1]
LIMITATION_FAILURE_3	failures	figure provenance gap	limitations	manuscript/config.yaml#madlib.lexicon.failures[3]
SCOPE_CONSTRAINT	constraints	all lexicon entries live in config	scope	manuscript/config.yaml#madlib.lexicon.constraints[1]
SCOPE_AUDIENCE	audiences	pipeline maintainers	scope	manuscript/config.yaml#madlib.lexicon.audiences[2]
AUTHORING_AUDIENCE	audiences	manuscript reviewers	authoring_contract	manuscript/config.yaml#madlib.lexicon.audiences[1]
AUTHORING_QUALITY	qualities	render readiness	authoring_contract	manuscript/config.yaml#madlib.lexicon.qualities[3]

Provenance Matrix I

Section	Token variables	Source categories
Abstract	STUDY_ADJECTIVE, STUDY_NOUN, STUDY_VERB	adjectives, nouns, verbs
Introduction: Lexicon as Data and Manuscript as Build Artifact	INTRO_NOUNS_1, INTRO_NOUNS_2, INTRO_NOUNS_3, INTRO_NOUNS_4, INTRO_VERBS_1, INTRO_VERBS_2, INTRO_VERBS_3, INTRO_VERBS_4	nouns, verbs
Methods: Source-Owned Token Injection and Conditional IMRAD Assembly	METHOD_NAME, METHOD_CONSTRAINT, METHOD_ARTIFACT_1, METHOD_ARTIFACT_2, METHOD_QUALITY_1, METHOD_QUALITY_2	artifacts, constraints, methods, qualities
Results: Provenance, Density, and Resolved Manuscript Surface	RESULT_MEASURE_1, RESULT_MEASURE_2, RESULT_MEASURE_3, RESULT_ARTIFACT_1, RESULT_ARTIFACT_2	artifacts, measures
Discussion: Accountability Boundaries for Generated Prose	DISCUSSION_ADJECTIVE, DISCUSSION_AUDIENCE_1, DISCUSSION_AUDIENCE_2	adjectives, audiences
Configuration: Schema-Controlled Lexicon, Slots, and Narrative Moves	CONFIG_CONSTRAINT	constraints
Evaluation: Gate Criteria, QA Probes, and Failure Discovery	EVALUATION_MEASURE_1, EVALUATION_MEASURE_2, EVALUATION_MEASURE_3, EVALUATION_ARTIFACT_1, EVALUATION_ARTIFACT_2	artifacts, measures
Reproducibility: Seeded Regeneration and Artifact Trace	REPRODUCIBILITY_ARTIFACT_1, REPRODUCIBILITY_ARTIFACT_2	artifacts

Provenance Matrix I

Section	Token variables	Source categories
Limitations: Non-Claims, Misuse Modes, and Human Review	LIMITATION_FAILURE_1, LIMITATION_FAILU RE_2, LIMITATION_FAILURE_3	failures
Scope: Related Generators and Responsible Forking	SCOPE_CONSTRAINT, SCOPE_AUDIENCE	audiences, constraints
Authoring Contract: Human Review and Forking Obligations	AUTHORING_AUDIENCE, AUTHORING_QUALITY	audiences, qualities