

Results

Candidate Outcome I

The generated loop selected `exp-mlp-tanh-64` (One-hidden-layer tanh MLP, MLP) after evaluating 4 candidate(s) from a proposed set of 5. The `nearest_centroid_baseline` (nearest-centroid) baseline reached 82.6% `test_accuracy`, while the selected candidate reached 89.4%, an absolute change of 6.8%. The selected model has 50890 parameters. The `transformer-candidate evaluated` flag is `true`, and the `candidate budget exhausted` flag is `true`, which means the ledger records 1 deferred proposal(s) rather than expanding the run automatically.

Candidate Outcome II

The benchmark score is 1. That score is not a model-quality claim by itself; it is a compact grading artifact for the methods contract: metric improvement, budget compliance, offline execution, and selected-candidate recording. Rank-stability diagnostics report that the selected candidate is top ranked in 72.5% of deterministic bootstrap resamples, with runner-up `exp-mlp-relu-32`. The candidate score figure is registered as `@fig:ml_candidate_scores`, the confusion matrix as `@fig:ml_confusion_matrix`, the per-class diagnostic as `@fig:ml_per_class_accuracy`, the learning curves as `@fig:ml_learning_curves`, the complexity diagnostic as `@fig:ml_complexity_accuracy`, the selected-candidate error examples as `@fig:mnist_error_examples`, the candidate lifecycle diagnostic as `@fig:autoresearch_candidate_lifecycle`, rank stability as `@fig:ml_candidate_rank_stability`, the training-dynamics diagnostic as `@fig:ml_training_dynamics`, the final readiness matrix as `@fig:autoresearch_stage_matrix`, and the process closure as `@fig:autoresearch_closure_flow`.

Candidate Outcome III

Table 1: Candidate accuracy intervals from `output/data/ml_candidate_intervals.json`; intervals describe the fixed local test split.


Candidate	Status	Correct/test	Accuracy	Wilson 95% interval
baseline	baseline	413/500	82.6%	79.0% to 85.7%
softmax linear	rejected	441/500	88.2%	85.1% to 90.7%
mlp relu 32	rejected	443/500	88.6%	85.5% to 91.1%
tiny patch attention	rejected	152/500	30.4%	26.5% to 34.6%
mlp tanh 64	accepted	447/500	89.4%	86.4% to 91.8%

Candidate Outcome IV

Table 2: Candidate rank-stability table from `output/data/ml_candidate_rank_stability.json`; frequencies are deterministic local bootstrap summaries.

Candidate	Observed rank	Top-rank frequency	Mean rank	Accuracy
softmax linear	3	4.2%	2.554	88.2%
mlp relu 32	2	23.3%	2.130	88.6%
tiny patch attention	4	0.0%	4.000	30.4%
mlp tanh 64	1	72.5%	1.316	89.4%

Run-Derived Figures I

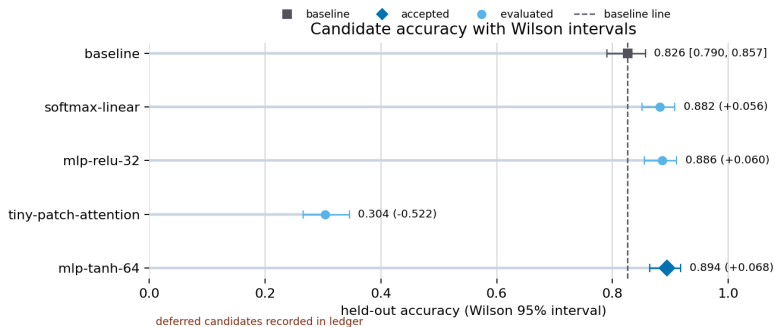

Run-Derived Figures II

Figure 1: Held-out accuracy with Wilson intervals for the baseline and evaluated candidates from `output/data/ml_candidate_intervals.json`; accepted candidate `exp-mlp-tanh-64` improves accuracy from 82.6% to 89.4% on the fixed subset, with deferred proposals kept in the candidate ledger. Generation method: Lollipop accuracy comparison with Wilson interval error bars and direct labels. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Run-Derived Figures III



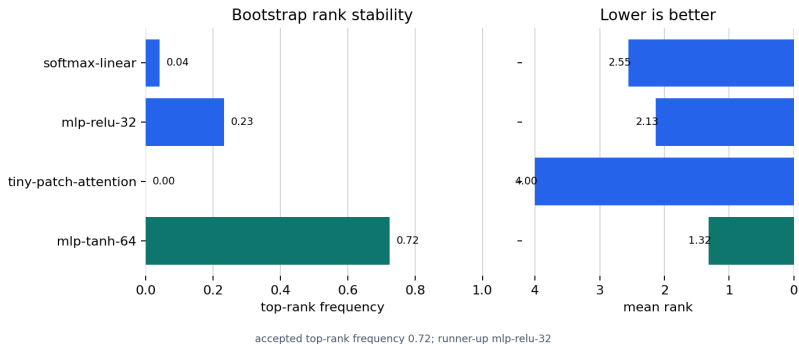


Figure 2: Rank-stability summary for exp-mlp-tanh-64 from output/data/ml_candidate_rank_stability.json; deterministic local bootstrap resampling shows how often each evaluated candidate ranks first under the fixed test split. Generation method: Bootstrap top-rank frequency and mean-rank comparison. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Run-Derived Figures IV

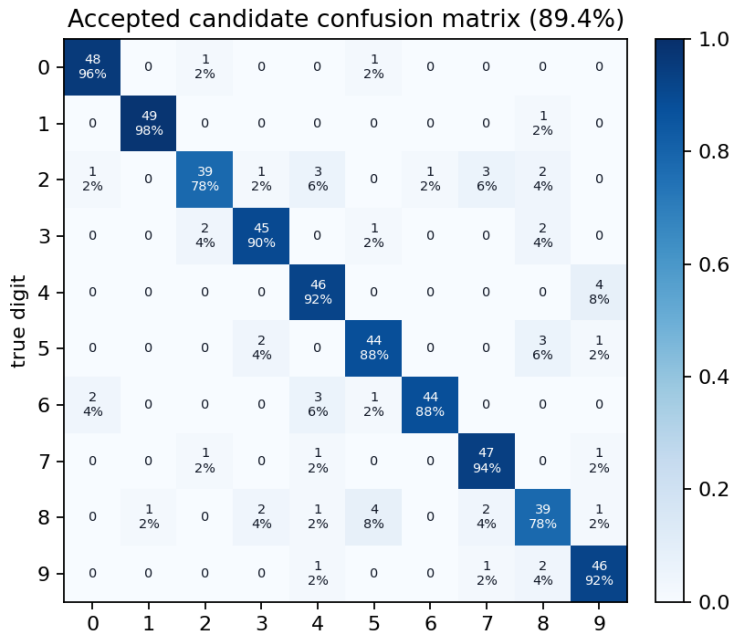


Training And Error Diagnostics I

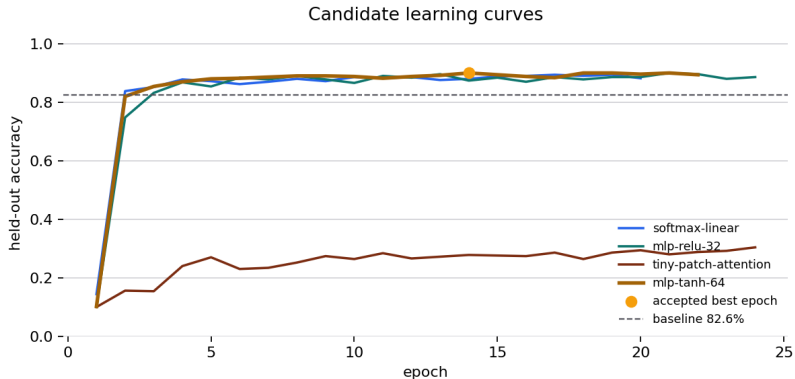

Training And Error Diagnostics II


Figure 5: Epoch-level held-out accuracy curves for evaluated candidates from `output/data/ml_training_history.csv`; the accepted curve is visually emphasized for `exp-mlp-tanh-64`. Generation method: Epoch-level held-out accuracy lines with accepted best-epoch marker. Registry metadata records the generation method, source artifact, and claim boundary for validation.

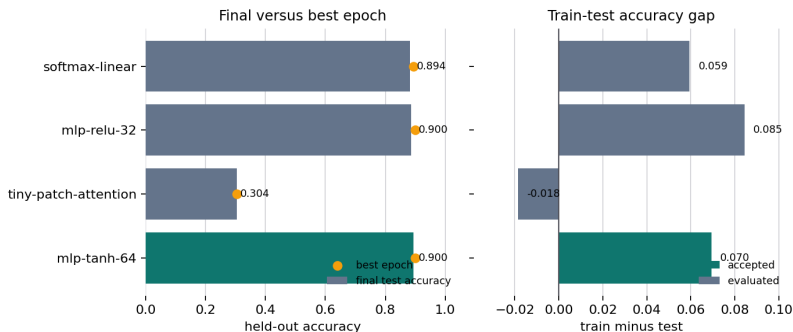

Training And Error Diagnostics III

Figure 6: Configured-training dynamics for evaluated candidates from `output/data/ml_training_diagnostics.json`; `exp-mlp-tanh-64` is highlighted while best-epoch markers and train-test gaps remain bounded to the local run. Generation method: Final and best-epoch accuracy bars plus train-test gap bars. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Training And Error Diagnostics IV

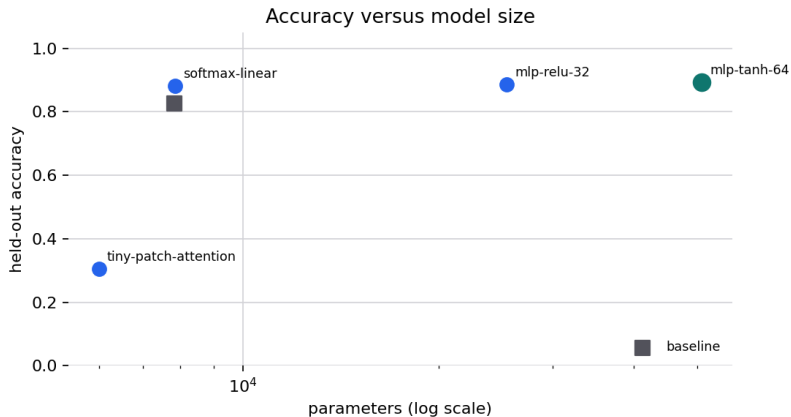

Training And Error Diagnostics V

Figure 7: Parameter-count versus held-out accuracy for the baseline and evaluated candidates from `output/data/ml_task_results.json`; the accepted candidate is highlighted without claiming a general scaling law. Generation method: Log-parameter scatter plot against held-out accuracy. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Training And Error Diagnostics VI

Accepted candidate error examples


true 0 / pred 2



true 0 / pred 5



true 1 / pred 8



true 2 / pred 7



true 2 / pred 6




true 2 / pred 0



true 2 / pred 7



true 2 / pred 4



true 2 / pred 3




true 2 / pred 4



Training And Error Diagnostics VII

Figure 8: First accepted-candidate error examples for exp-mlp-tanh-64, sourced from output/data/ml_error_examples.json and data/mnist_small.npz; these images support qualitative diagnosis only. Generation method: Deterministic grid of the first accepted-candidate misclassifications. Registry metadata records the generation method, source artifact, and claim boundary for validation.

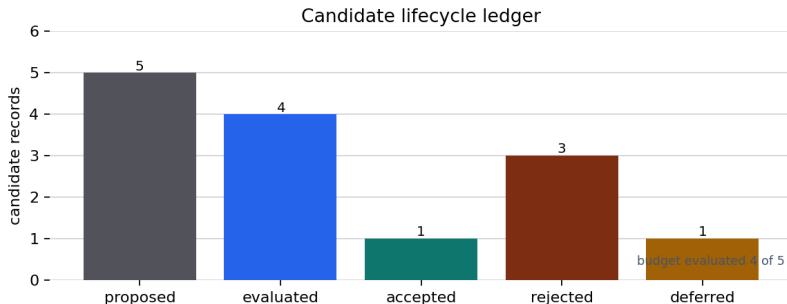

Training And Error Diagnostics VIII

Figure 9: Candidate lifecycle ledger from `output/data/ml_candidate_ledger.json`: 4 evaluated out of 5 proposed candidates, with deferred proposals kept visible instead of executed automatically. Generation method: Candidate lifecycle status-count bar chart. Registry metadata records the generation method, source artifact, and claim boundary for validation.

The selected candidate's best held-out epoch is 14, its final learning rate is 0.144, its train-loss reduction is 4.161, and its final train-test accuracy gap is 7.0%. These values come from the configured training diagnostics rather than from a manually maintained result summary.

Table 3: Configured-training diagnostics from `output/data/ml_training_diagnostics.json`.

Candidate	Status	Best epoch	Best test accuracy	Final test accuracy	Train-test gap	Loss reduction	Final learning rate
softmax	rejected	17	89.4%	88.2%	5.9%	2.917	0.273
linear	rejected	21	90.0%	88.6%	8.5%	4.341	0.178
mlp relu 32	rejected						

Training And Error Diagnostics IX

tiny patch	rejected	24	30.4%	30.4%	-1.8%	0.165	0.214
attention							
mlp tanh 64	accepted	14	90.0%	89.4%	7.0%	4.161	0.144


Diagnostic Analysis I

The selected candidate macro F1 is 89.4%, with a held-out accuracy interval of 86.4% to 91.8%. Probability diagnostics report expected calibration error 2.9% and 11 high-confidence error(s). The top non-diagonal confusion pair is 4 $\rightarrow$ 9 (4), and the minimum selected-candidate accuracy across deterministic robustness transforms is 80.0%. These values are descriptive diagnostics for the validated local run, not external benchmark claims.

Diagnostic Analysis II

Classification And Error Structure

The class-level and error-pattern diagnostics are intentionally visual-first: @fig:ml_calibration_reliability checks confidence calibration, @fig:ml_classification_metrics_heatmap separates precision, recall, and F1 by digit, and @fig:ml_confusion_pairs ranks the non-diagonal confusions that most shape the selected-candidate error profile. The accompanying tables preserve the same values for audit and downstream comparison.

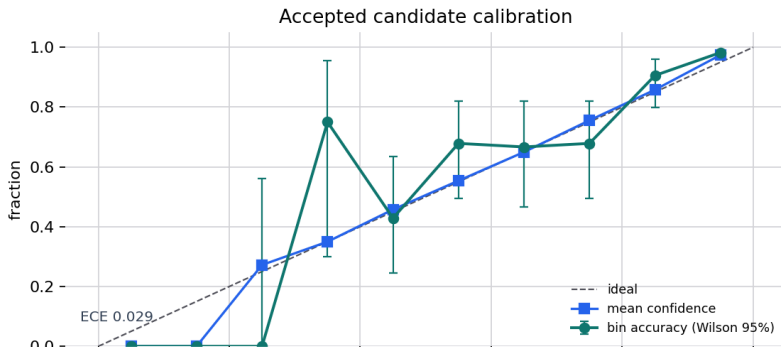

Candidate Ledger I

Table 15: Candidate lifecycle ledger from `output/data/ml_candidate_ledger.json`.

Candidate	Model	Status	Test accuracy	Parameters
baseline	nearest-centroid	baseline	82.6%	7840
softmax linear	softmax regression	rejected	88.2%	7850
mlp relu 32	MLP	rejected	88.6%	25450
tiny patch attention	tiny patch-attention	rejected	30.4%	5994
mlp tanh 64	MLP	accepted	89.4%	50890
mlp relu 64 deferred	MLP	deferred	N/A	0

Candidate Ledger II

The candidate-selection audit separates the objective ranking from descriptive diagnostics. It records the configured metric, Wilson interval, probability quality, parameter count, and deterministic tie-break context for each evaluated candidate. The diagnostic-boundary table states what each generated surface supports and what it does not support.

Table 16: Candidate-selection audit from `output/data/ml_candidate_selection_audit.json`; the objective metric ranks candidates, while probability diagnostics and parameter counts audit the chosen tie-break context.

Rank	Candidate	Status	Accuracy	Wilson 95%	Brier	NLL	Parameters
1	mlp tanh 64	accepted	89.4%	86.4% to 91.8%	0.161	0.361	50890
2	mlp relu 32	rejected	88.6%	85.5% to 91.1%	0.164	0.380	25450
3	softmax linear	rejected	88.2%	85.1% to 90.7%	0.173	0.390	7850
4	tiny patch attention	rejected	30.4%	26.5% to 34.6%	0.873	2.179	5994

Candidate Ledger III

Table 17: Diagnostic claim-boundary table from output/data/ml_diagnostic_boundary.json.

Surface	Source	Method	Supports	Does not support
objective selection	task results	rank evaluated candidates by configured held-out metric and deterministic tie...	accepted-candidate selection within this fixed local task	full MNIST state-of-the-art, external benchmark leadership, or universal mode...
descriptive diagnostics	class diagnostics	per-class metrics, calibration, probability quality, and paired comparison	local error analysis and uncertainty description	population-level certification or deployment readiness
robustness smoke test	robustness report	deterministic no-retrain transforms applied to the fixed test split	small perturbation smoke-test evidence	adversarial robustness or distribution-shift robustness
artifact integrity	integrity attestation	local SHA-256 checks over declared inputs and generated artifacts	local artifact integrity evidence for the run	external signing, production SLSA compliance, or runtime intrusion detection
review governance	review decisions	deferred generated review decisions with human review required	readiness for human review	machine self-approval or publication acceptance

Readiness And Review Artifacts I

The broader AutoResearch run writes the reproducibility, benchmark, review, and manuscript-hydration surfaces summarized below. The schema manifest records 31 schema-versioned governance payload(s), and the local research-object manifest records 84 observed artifact record(s) with checksums and approval state false. The phase ledger records 3 settlement pass(es), while the figure-quality report covers 25 registered figure(s) with validity false.

Readiness And Review Artifacts II

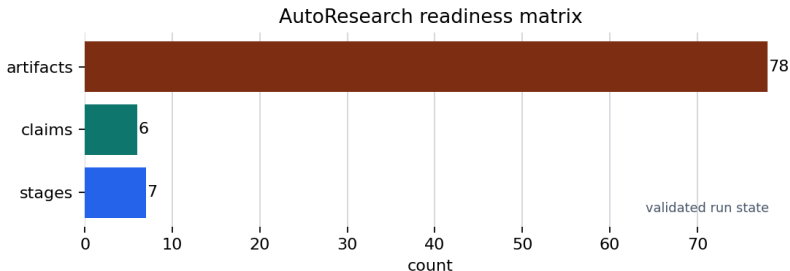


Figure 20: Validated AutoResearch run with 7 stages, 6 supported claims, and 78 required artifacts from output/data/autoresearch_loop.json; the count summarizes readiness artifacts, not human approval. Generation method: Horizontal count summary from final loop metrics. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Readiness And Review Artifacts III

File-backed AutoResearch closure



Figure 21: File-backed AutoResearch closure from program through review, with 6 supported claims and readiness passed; review remains a deferred human decision and the provenance path remains inspectable. Generation method: File-backed process-flow diagram from final loop state. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Readiness And Review Artifacts IV

Table 18: Generated artifact manifest from output/reports/artifact_manifest.json.

Artifact	Role	Bytes
output/data/autoresearch_claims.json	Loop artifact	1766
output/data/autoresearch_evidence_of_evidence.json	Evidence of evidence	4436
output/data/autoresearch_integrity_and_security_evidence	Security evidence	22755
output/data/autoresearch_inventory_of_inventory_evidence	Inventory evidence	20155
output/data/autoresearch_loop.json	Loop artifact	16085
output/data/autoresearch_phase_ledger.json	Run or candidate ledger	3779
output/data/autoresearch_plan.json	Loop artifact	19262
output/data/autoresearch_review_packet.json	Review packet	16204
output/data/autoresearch_schema_manifest.json	Manifest artifact	7226
output/data/autoresearch_security_of_security_evidence	Security evidence	1537
output/data/autoresearch_stage_matrix.json	Loop artifact	749
output/data/autoresearch_supply_chain_inventory_of_inventory	Inventory of inventory	21411
output/data/autoresearch_threat_model_of_security_evidence	Security evidence	6370
output/data/benchmark_boundary.json	Benchmark grading	2363
output/data/benchmark_scores.json	Benchmark grading	621
output/data/figure_quality_report.json	Loop artifact	16040
output/data/figure_style.json	Loop artifact	1117
output/data/idea_ledger.json	Run or candidate ledger	5233
output/data/manuscript_figure_blocks_manifest.json	Manuscript hydration	13062
output/data/manuscript_variable_provider_manifest.json	Manuscript hydration	30891
output/data/manuscript_variables.json	Manuscript hydration	54968
output/data/ml_bootstrap_intervals.json	Loop artifact	615
output/data/ml_calibration_bin_intervals.json	Loop artifact	2879
output/data/ml_calibration_report.json	Loop artifact	2201
output/data/ml_candidate_intervals.json	Loop artifact	1577
output/data/ml_candidate_ledger.json	Run or candidate ledger	570872
output/data/ml_candidate_rank_stability.json	Loop artifact	3135
output/data/ml_candidate_selection_ledger.json	Loop artifact	2145
output/data/ml_class_balance.json	Loop artifact	2393
output/data/ml_classification_diagnostic.json	Loop artifact	4246

Readiness And Review Artifacts V

output/data/ml_confusion_matrix.csv	Loop artifact	271
output/data/ml_diagnostic_boundary.json	Loop artifact	2064
output/data/ml_error_examples.json	Loop artifact	989
output/data/ml_paired_comparison.json	Loop artifact	470
output/data/ml_prediction_records.json	Loop artifact	989913
output/data/ml_probability_diagnostic.json	Loop artifact	3045
output/data/ml_robustness_report.json	Loop artifact	3758
output/data/ml_statistical_summary.json	Loop artifact	3032
output/data/ml_task_results.json	Loop artifact	703566
output/data/ml_training_diagnostics.json	Loop artifact	2968
output/data/ml_training_history.csv	Loop artifact	6775
output/data/mnist_task_config.json	Loop artifact	3926
output/data/publication_ledger.json	Run or candidate ledger	1005
output/data/research_object_manifest.json	Loop artifact	20789
output/data/research_program.json	Loop artifact	965
output/data/review_decisions.json	Review packet	669
output/data/run_ledger.json	Run or candidate ledger	328
output/data/transmission_manifest.json	Loop artifact	503
output/figures/autoresearch_candidate_generated_figure	Generated figure	28053
output/figures/autoresearch_closure_generated_figure	Generated figure	40410
output/figures/autoresearch_integrity_generated_figure	Generated figure	48256
output/figures/autoresearch_security_generated_figure.png	Generated figure	86574
output/figures/autoresearch_stage_generated_figure	Generated figure	23476
output/figures/figure_registry.json	Loop artifact	30674
output/figures/ml_bootstrap_intervals_generated_figure	Generated figure	21834
output/figures/ml_calibration_reliability_generated_figure	Generated figure	73889
output/figures/ml_candidate_rank_stability_generated_figure	Generated figure	43692
output/figures/ml_candidate_scores.png	Generated figure	59953
output/figures/ml_classification_metrics_generated_figure.png	Generated figure	55092
output/figures/ml_complexity_accuracy_generated_figure	Generated figure	35135
output/figures/ml_confusion_matrix.png	Generated figure	65820
output/figures/ml_confusion_pairs.png	Generated figure	33982
output/figures/ml_generalization_gap_generated_figure	Generated figure	48512
output/figures/ml_learning_curves.png	Generated figure	59258
output/figures/ml_paired_correctness.png	Generated figure	43309
output/figures/ml_per_class_accuracy_generated_figure	Generated figure	34800

Readiness And Review Artifacts VI

output/figures/ml_probability_margin_distribution.png	Generated figure	41754
output/figures/ml_probability_quality.png	Generated figure	38071
output/figures/ml_robustness_matrix.png	Generated figure	51332
output/figures/ml_selective_accuracy.png	Generated figure	48274
output/figures/ml_training_dynamics.png	Generated figure	51004
output/figures/mnist_class_balance.png	Generated figure	27059
output/figures/mnist_error_examples.png	Generated figure	28431
output/figures/mnist_subset_contact_graph.png	Generated figure	23617
output/figures/transmission_integrity.png	Generated figure	18348
output/figures/transmission_pairing.png	Generated figure	11286
output/manuscript/00_00_transmission_model.png	Manuscript hydration	1554
output/manuscript/00_abstract.md	Manuscript hydration	1451
output/manuscript/01_introduction.md	Manuscript hydration	14774
output/manuscript/02_methodology.md	Manuscript hydration	21097
output/manuscript/03_results.md	Manuscript hydration	39363
output/manuscript/04_conclusion.md	Manuscript hydration	2642
output/manuscript/99_references.md	Manuscript hydration	58
output/manuscript/99_zz_transmission_model.png	Manuscript hydration	543
output/manuscript/config.yaml	Manuscript hydration	3233
output/manuscript/preamble.md	Manuscript hydration	137
output/manuscript/references.bib	Manuscript hydration	23228
output/pdf/template_autoresearch_project_template.pdf	Loop artifact	1342096
output/release/sw_h_repo_url.txt	Loop artifact	59
output/release/upload_receipts.json	Loop artifact	2004
output/reports/autoresearch_evidence_registry	Evidence registry	1136
output/reports/autoresearch_loop.json	Loop artifact	16085
output/reports/autoresearch_loop.md	Loop artifact	1982
output/reports/autoresearch_review_packet	Review packet	912
output/reports/autoresearch_security_review_packet	Review packet	1104
output/reports/autoresearch_summary	Loop artifact	255
output/reports/benchmark_readiness_benchmark	Benchmark grading	778
output/reports/manuscript_composition	Manuscript hydration	2149
output/reports/ml_benchmark_score	Benchmark grading	382
output/reports/ml_experiment_report	Loop artifact	1687
output/reports/test_results.json	Loop artifact	616
output/reports/test_results.md	Loop artifact	293

Readiness And Review Artifacts VII

output/slides/00_abstract_slides.pdf	Loop artifact	15419
output/slides/01_introduction_slides.pdf	Loop artifact	30739
output/slides/02_methodology_slides.pdf	Loop artifact	191202
output/slides/03_results_slides.pdf	Loop artifact	1060056
output/slides/04_conclusion_slides.pdf	Loop artifact	15939
output/slides/99_references_slides.pdf	Loop artifact	7623
output/web/_combined_manuscript.m	Manuscript hydration	81389
output/web/favicon.ico	Loop artifact	121
output/web/index.html	Loop artifact	127633
output/web/manuscript__00_abstract	Manuscript hydration	5627
output/web/manuscript__01_introduction	Manuscript hydration	19028
output/web/manuscript__02_methodology	Manuscript hydration	32746
output/web/manuscript__03_results	Manuscript hydration	69087
output/web/manuscript__04_conclusion	Manuscript hydration	6574
output/web/manuscript__99_references	Manuscript hydration	3942

Readiness And Review Artifacts VIII

Table 19: Review-gate decisions from output/data/review_decisions.json.

Gate	Required	Decision	Rationale
proposal_review	True	deferred	Decision is read from human_review.yaml when present; generated readiness is not approval.
evidence_review	True	deferred	Decision is read from human_review.yaml when present; generated readiness is not approval.

Readiness And Review Artifacts IX

Table 20: Benchmark grading table from `output/data/benchmark_scores.json`.

Benchmark task	Status	Score	Grading output
readiness-smoke	graded	1	output/reports/benchmark_readiness_
ml-loop-score	graded	1	output/reports/ml_benchmark_score.j

Readiness And Review Artifacts X

Table 21: Deterministic phase ledger from output/data/autoresearch_phase_ledger.json; settlement order is not an autonomy claim.

Phase	Order	Group	Observed artifacts	Description
intrinsic readiness	1	readiness	3	validate configured project-intrinsic contracts
core artifacts	2	loop	0	write plan, stage matrix, and provisional loop outputs
evidence registry	3	evidence	2	write local evidence registry
ml task	4	ml	54	run fixed-seed bounded candidate evaluation
method contract	5	governance	3	write program, idea, run, review, and benchmark ledgers
provisional payloads	6	settlement	12	refresh loop payloads before extrinsic validation
security artifacts	7	security	10	write local security and integrity evidence
final visuals	8	figures	54	write final registry-backed figures
manuscript hydration	9	manuscript	9	write variables, provenance, and figure blocks
readiness manifest	10	settlement	12	refresh checksum manifest before extrinsic validation
schema manifest	11	schema	1	write generated JSON schema-version manifest

Readiness And Review Artifacts XI

research object manifest	12	packaging	1	write local research-object manifest
extrinsic readiness	13	readiness	3	validate generated artifacts and extrinsic contracts
final schema manifest	14	schema	1	refresh schema manifest after final payload updates
final research object manifest	15	packaging	1	refresh local research-object manifest
artifact manifest	16	settlement	12	write final artifact checksum manifest

Readiness And Review Artifacts XII

Table 22: Figure-quality checks from output/data/figure_quality_report.json; 25 registered figure(s) were checked.


Figure	Pixels	Variance	Source exists	Nonblank
fig:autoresearch_candidate_cycle	1184x480	0.083	True	True
fig:autoresearch_closure	666x448	0.015	True	True
fig:autoresearch_integrity	440x334	0.040	True	True
fig:autoresearch_security_matrix	476x734	0.014	True	True
fig:autoresearch_stage	1120x416	0.080	True	True
fig:ml_bootstrap_interval	1152x448	0.009	True	True
fig:ml_calibration_reliability	1152x832	0.015	True	True
fig:ml_candidate_rank	1408x568	0.053	True	True
fig:ml_candidate_scores	1376x688	0.013	True	True
fig:ml_classification_matrix	928x832	0.092	True	True
fig:ml_complexity_accuracy	1280x608	0.010	True	True
fig:ml_confusion_matrix	896x768	0.046	True	True
fig:ml_confusion_pairs	1152x576	0.129	True	True
fig:ml_generalization_gap	1184x864	0.059	True	True
fig:ml_learning_curves	1216x608	0.018	True	True
fig:ml_paired_correctness	1152x672	0.075	True	True
fig:ml_per_class_accuracy	1152x512	0.098	True	True
fig:ml_probability_margin_distribution	1184x864	0.024	True	True
fig:ml_probability_quality	1134x608	0.046	True	True
fig:ml_robustness_matrix	1280x608	0.073	True	True
fig:ml_selective_accuracy	1088x608	0.016	True	True
fig:ml_training_dynamics	1408x608	0.072	True	True
fig:mnist_class_balance	216x544	0.071	True	True
fig:mnist_error_examples	1280x734	0.234	True	True
fig:mnist_subset_containment	216x544	0.228	True	True

Security Readiness And Integrity Evidence I

The local security profile reports attestation status passed after checking 80 file record(s), with 0 missing record(s) and 0 checksum mismatch(es). The inventory contains 14 input record(s) and 69 generated-artifact record(s). The integrity-chain figure is @fig:autoresearch_integrity_chain. These values support local artifact-integrity claims only; they do not claim external signing, production SLSA compliance, or runtime security monitoring.

Security Readiness And Integrity Evidence II

Local artifact integrity chain

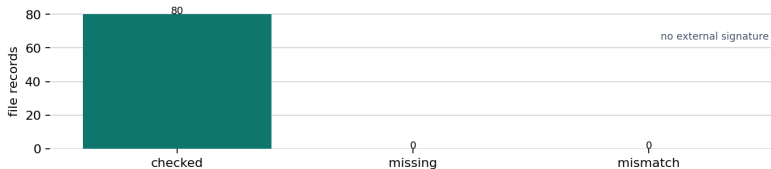

Security Readiness And Integrity Evidence III

Figure 22: Local integrity chain from `output/data/autoresearch_integrity_attestation.json`; checksums summarize the observed run artifacts and remain unsigned local evidence. Generation method: Local checksum attestation chain with checked, missing, and mismatch counts. Registry metadata records the generation method, source artifact, and claim boundary for validation.

Table 23: Integrity-attestation summary from `output/data/autoresearch_integrity_attestation.json`.

Integrity field	Value
status	passed
algorithm	sha256
checked files	80
missing files	0
checksum mismatches	0
external signature	False

Manuscript Hydration Provenance I

The final run supports 6 manuscript-facing claim(s) and checks 78 required artifact(s). The rendered manuscript uses injected variables from generated data payloads, so the abstract and results track the latest analysis run rather than hard-coded counts. The final readiness status is passed; generated review decisions are recorded as deferred for human review rather than as self-approval.

Table 24: Variable provenance summary from `output/data/manuscript_variable_provenance.json`.

Source artifact	Injected variables or fragments
output/data/autoresearch_integrity_attestation.json	5
output/data/autoresearch_loop.json	57
output/data/autoresearch_phase_ledger.json	2
output/data/autoresearch_schema_manifest.json	1
output/data/autoresearch_security_profile.json	6
output/data/autoresearch_supply_chain_inventory.json	3
output/data/autoresearch_threat_model.json	4
output/data/benchmark_scores.json	1
output/data/figure_quality_report.json	3
output/data/manuscript_variable_provenance.json	1
output/data/ml_bootstrap_intervals.json	3
output/data/ml_calibration_bin_intervals.json	1
output/data/ml_calibration_report.json	3
output/data/ml_candidate_intervals.json	1

Manuscript Hydration Provenance II

output/data/ml_candidate_ledger.json	1
output/data/ml_candidate_rank_stability.json	3
output/data/ml_candidate_selection_audit.json	1
output/data/ml_class_balance.json	3
output/data/ml_classification_diagnostics.json	5
output/data/ml_diagnostic_boundary.json	1
output/data/ml_paired_comparison.json	3
output/data/ml_probability_diagnostics.json	4
output/data/ml_robustness_report.json	2
output/data/ml_statistical_summary.json	9
output/data/ml_task_results.json	39
output/data/ml_training_diagnostics.json	7
output/data/research_object_manifest.json	2
output/data/review_decisions.json	1
output/figures/figure_registry.json	51
output/reports/artifact_manifest.json	1
