GNN / BAYESIAN MODEL CARD

From declarations to executed models

A time-unrolled POMDP view, parsed dependencies and the complete consumer inventory.

BAYESIAN TIME SLICE / conditional on the selected action

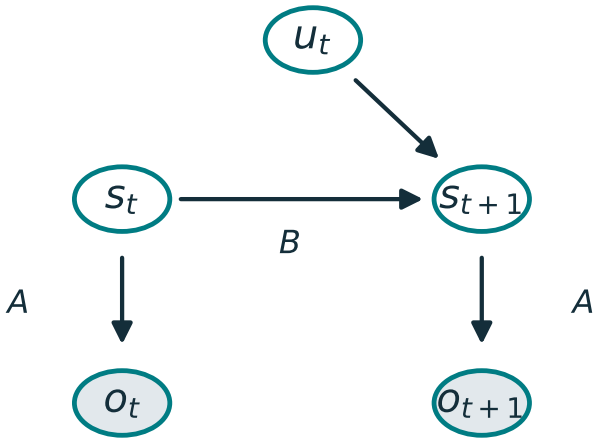

A observation | state

B next state | state, action

D initial-state prior

C log outcome preferences

Shaded: observations. Open: latent states and the conditioned action. D initializes the first state; C guides native policy selection, outside this conditional DAG.

$$P(s_{0:T}, o_{0:T} \mid u_{0:T-1}, A, B, D) = D(s_0) \prod_{t=0}^{T} A(o_t \mid s_t) \prod_{t=0}^{T-1} B(s_{t+1} \mid s_t, u_t)$$

DECLARATION GRAPH / source structure, not an instantaneous causal DAG

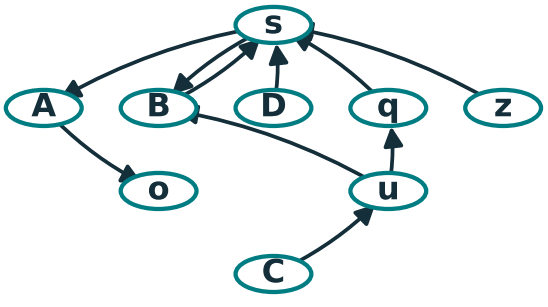

26 declarations; 2 topology groups. Complete query graph shown. B advances time; q and z define the joint basis. Full models are linked below.

The Bayesian diagram defines the tensor semantics. Finite consumers add their own declared task laws; a shared backend label does not establish native execution.

AUTHORING INPUTS / complete executed instances in the linked cards

Declaration / consumer	A	B	C	D	SHA
analysis Protocol carrier	1 x 1	1 x 1 x 1	1	1	93ac17
gratitude Finite learner	3 x 2	2 x 2 x 1	3	2	a2945f
nothingness Finite comparators	2 x 2	2 x 2 x 1	2	2	5cfa88
attention_positive Native GNN / pymdp	3 x 13	13 x 13 x 13	3	13	1d47aa
attention_negative Native GNN / pymdp	3 x 13	13 x 13 x 13	3	13	2b5411
emptiness_practice Finite inquiry	2 x 3	3 x 3 x 1	2	3	e27328
gaze Finite scene inquiry	3 x 3	3 x 3 x 1	3	3	2a370a
boundary_gaze Finite joint inquiry	9 x 9	9 x 9 x 1	9	9	4d0b48

A: observation x state; B: next x previous x action. SHA: source-digest prefix only. Full tensors, settings, annotations, native graphs, dependency revisions and evidence digests are in the linked complete card.

Scope: finite synthetic software models. These graphs do not establish human gratitude, contemplative realization, clinical efficacy or philosophical equivalence.