


0814~ 0815

글 입력해서

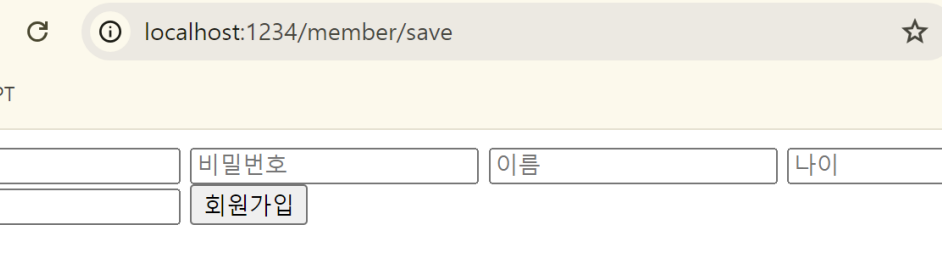

The screenshot shows a web browser window with two tabs: 'ChatGPT' and 'save'. The address bar displays 'localhost:1234/member/save'. Below the address bar, there is a form with five input fields and one button. The input fields are labeled '이메일' (Email), '비밀번호' (Password), '이름' (Name), '나이' (Age), and '전화번호' (Phone Number). The button is labeled '회원가입' (Sign Up).

이메일	비밀번호	이름	나이
전화번호	회원가입		

아래와 같이 받으면 성공

```

Run: Tomcat
Console
Tomcat Localhost Log
Tomcat Access Log
SLF4J: Defaulting to no-operation (NOP) logger implementation
SLF4J: See http://www.slf4j.org/codes.html#StaticLoggerBinder for further details.
15-Aug-2024 14:15:15.048 WARNING [main] org.apache.catalina.util.SessionIdGeneratorBase.createSecureRandom 알고리즘을 사용하여, 세션 ID를 생성하기 위한 SecureRandom
15-Aug-2024 14:15:16.344 INFO [main] org.apache.catalina.startup.HostConfig.deployDescriptor 배치 descriptor [C:\Users\USER\SmartTomcat\springframework_setting_01\spr
15-Aug-2024 14:15:16.352 INFO [main] org.apache.coyote.AbstractProtocol.start 프로토콜 핸들러 ["http-nio-1234"]용(종) 시작합니다.
15-Aug-2024 14:15:16.484 INFO [main] org.apache.catalina.startup.Catalina.start 서버가 [4356] 밀리초 내에 시작되었습니다.
http://localhost:1234/
memberDTO = MemberDTO(id=null, memberEmail=aa, memberPassword=aa, memberName=aa, memberAge=1212, memberMobile=010-1234-1234)
Version Control Run TODO Problems Terminal Services Build

```

MemberController

```
package com.codingrecipe.project01.controller;
```

```

import com.codingrecipe.project01.dto.MemberDTO;
import com.codingrecipe.project01.service.MemberService;
import lombok.RequiredArgsConstructor;
import org.springframework.stereotype.Controller;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.ModelAttribute;
import org.springframework.web.bind.annotation.PostMapping;
import org.springframework.web.bind.annotation.RequestMapping;

@Controller
@RequestMapping("/member")
@RequiredArgsConstructor
public class MemberController {
    private final MemberService memberService;

    //    @GetMapping("/member/save") // /member/member/save
    @GetMapping("/save")
    public String saveForm() {
        return "save";
    }

    @PostMapping("/save")
    public String save(@ModelAttribute MemberDTO memberDTO) {
        int saveResult = memberService.save(memberDTO);
        if (saveResult > 0) { // 그 리턴값이 0보다 크냐 따져서
            return "login"; //가입이 성공했다는 케이스
        } else {
            return "save"; // 가입이 실패했다는 케이스
        }
    }
}

```

MemberService

```

package com.codingrecipe.project01.service;

import com.codingrecipe.project01.dto.MemberDTO;
import com.codingrecipe.project01.repository.MemberRepository;

```

```

import lombok.RequiredArgsConstructor;
import org.springframework.stereotype.Service;

@Service
@RequiredArgsConstructor
public class MemberService {
    private final MemberRepository memberRepository;

    public int save(MemberDTO memberDTO) {
        return memberRepository.save(memberDTO);    //service
    }
}

```

MemberRepository

```

package com.codingrecipe.project01.repository;

import com.codingrecipe.project01.dto.MemberDTO;
import org.springframework.stereotype.Repository;

@Repository
public class MemberRepository { //Repository class는 DB쪽과 연관
    public int save(MemberDTO memberDTO) {
        System.out.println("memberDTO = " + memberDTO);
        return 0;
    }
}

```

MemberDTO

```

package com.codingrecipe.project01.dto;

import lombok.Getter;
import lombok.Setter;
import lombok.ToString;

@Getter
@Setter

```

```
@ToString
public class MemberDTO {
    private Long id;
    private String memberEmail;
    private String memberPassword;
    private String memberName;
    private int memberAge;
    private String memberMobile;
}
```

save.jsp

```
<%@ page contentType="text/html; charset=UTF-8" language="java" %>
<html>
<head>
    <title>save</title>
</head>
<body>
    <form action="/member/save" method="post">
        <input type="text" name="memberEmail" placeholder="이메일">
        <input type="text" name="memberPassword" placeholder="비밀번호">
        <input type="text" name="memberName" placeholder="이름">
        <input type="text" name="memberAge" placeholder="나이">
        <input type="text" name="memberMobile" placeholder="전화번호">
        <input type="submit" value="회원가입">
    </form>
</body>
</html>
```

servlet-context.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:mvc="http://www.springframework.org/schema/mvc"
    xmlns:context="http://www.springframework.org/schema/context"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
        http://www.springframework.org/sch
```

```

http://www.springframework.org/schema/beans
http://www.springframework.org/schema/context
http://www.springframework.org/schema/tx
http://www.springframework.org/schema/tx

<mvc:annotation-driven />

<!-- Handles HTTP GET requests for /resources/** by efficiently
<mvc:resources mapping="/resources/**" location="/resources/" />

<!-- Resolves views selected for rendering by @Controller
<bean class="org.springframework.web.servlet.view.InternalResourceViewResolver"
    <property name="prefix" value="/WEB-INF/views/" />
    <property name="suffix" value=".jsp" />
</bean>

<!-- 프로젝트 패키지이름 확인 -->
<context:component-scan base-package="com.codingrecipe.project" />

</beans>

```

root-context.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:jdbc="http://www.springframework.org/schema/jdbc"
    xmlns:tx="http://www.springframework.org/schema/tx"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
        http://www.springframework.org/schema/beans http://www.springframework.org/schema/tx
        http://www.springframework.org/schema/tx http://www.springframework.org/schema/tx" />

<!-- 데이터베이스 이름 및 계정 확인 -->
<bean id="dataSource"
    class="org.springframework.jdbc.datasource.DriverManagerDataSource"
    <property name="driverClassName" value="com.mysql.cj.jdbc.Driver" />
    <property name="url" value="jdbc:mysql://localhost:3306/codingrecipe" />
    <property name="username" value="user_codingrecipe" />

```

```

        <property name="password" value="1234"/>
    </bean>

    <!-- 파일 모두 생성했는지 확인 -->
    <bean id="sqlSessionFactory" class="org.mybatis.spring.SqlSessionFacto
        <property name="dataSource" ref="dataSource"/>
        <property name="configLocation" value="classpath:/my
        <property name="mapperLocations" value="classpath:/ma
    </bean>

    <bean id="sqlSession" class="org.mybatis.spring.SqlSession
        <constructor-arg name="sqlSessionFactory" ref="sqlSes
    </bean>

    <bean id="transactionManager"
        class="org.springframework.jdbc.datasource.DataSource
        <property name="dataSource" ref="dataSource" />
    </bean>

    <bean id="multipartResolver"
        class="org.springframework.web.multipart.commons.CommonsMultipartReso

        <property name="defaultEncoding" value="UTF-8" />
        <property name="maxUploadSize" value="10000000" />

    </bean>


    <tx:annotation-driven transaction-manager="transactionMan

</beans>


```

2-2강 회원가입

Mysql을 설치하는데 이미 MariaDB가 깔려있어서 3306포트충돌이 났다. MariaDB를 중지하거나 포트를 변경하고 설치해도 되는데 나는 그냥 Mysql설치포트를 3306에서 3307로 바꿔주었다.

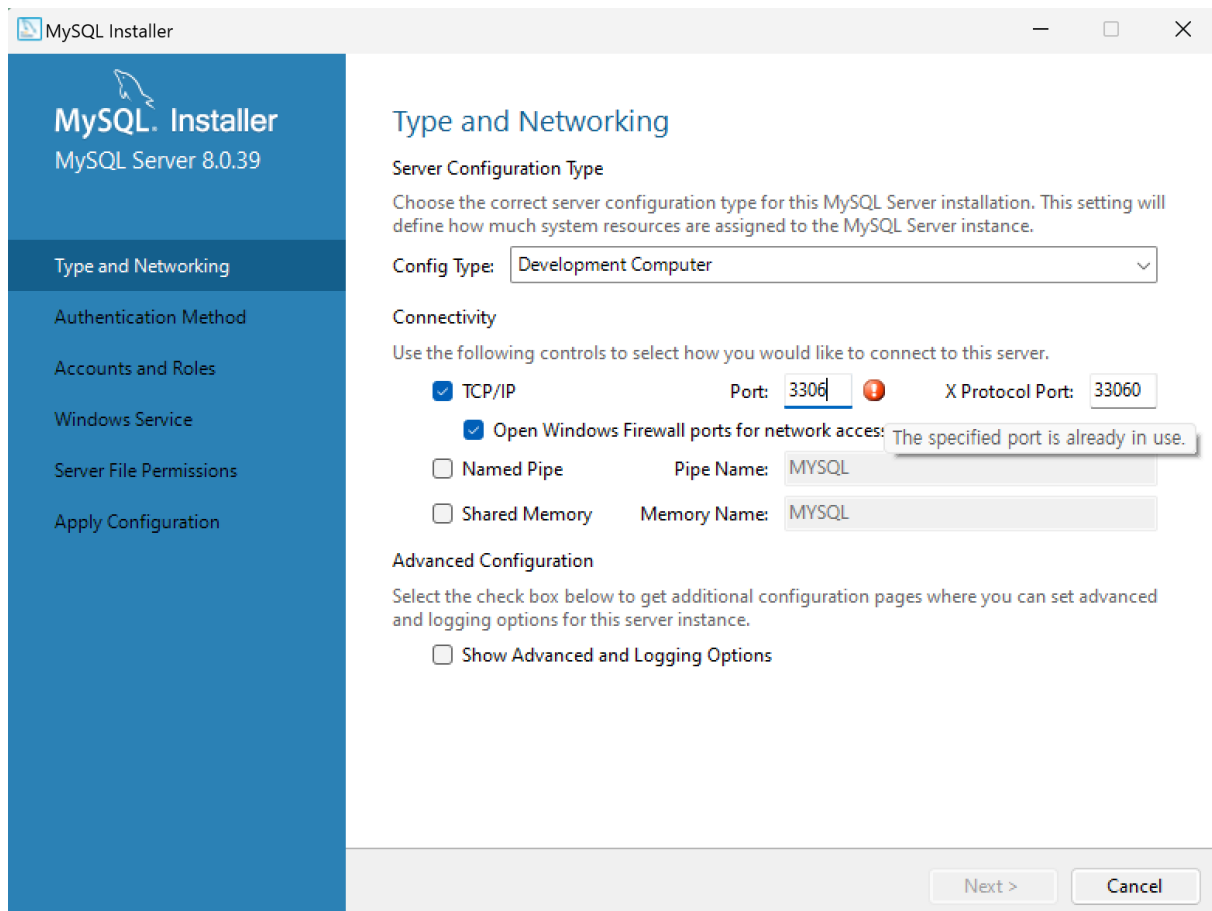

(변경전)

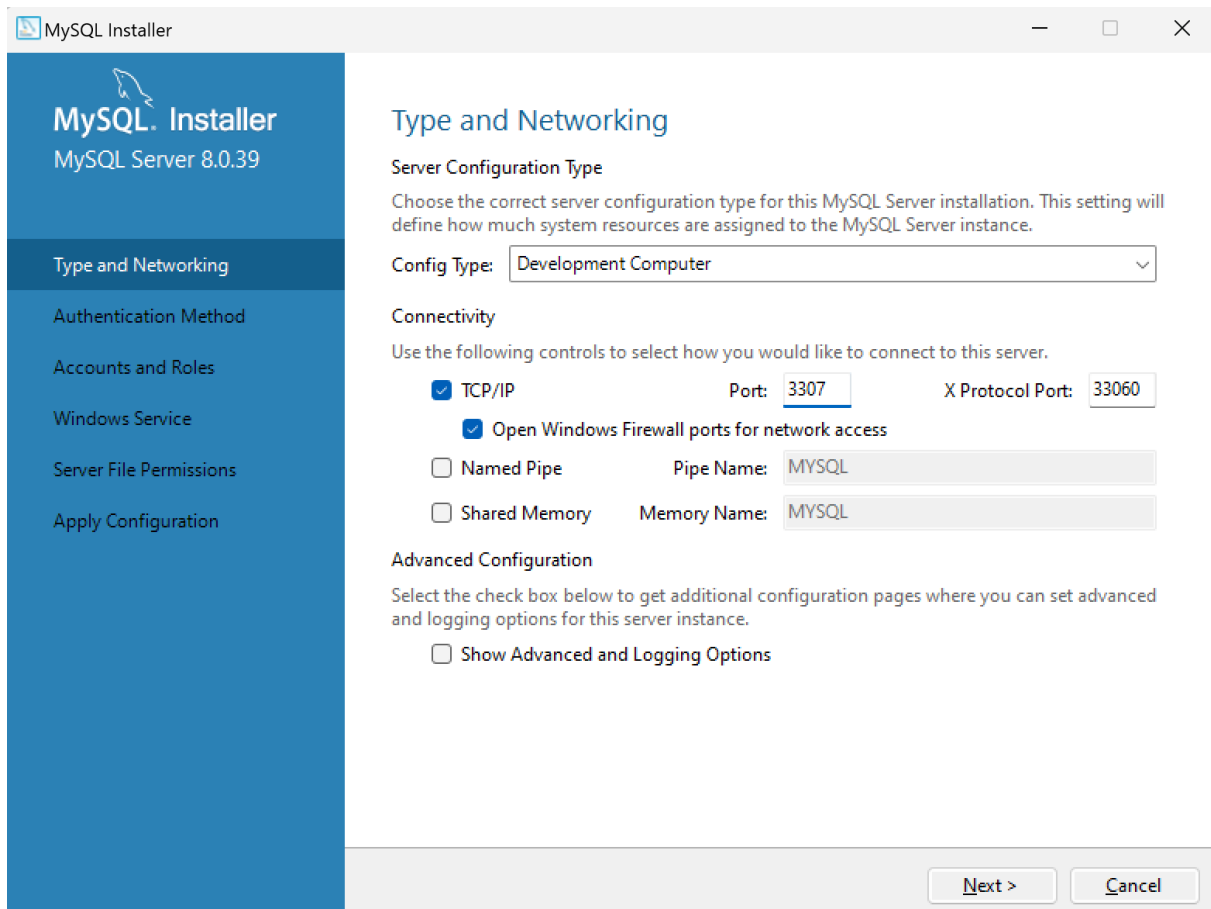

(변경후)

설치해준 후 root 에서 user와 권한등을 설정해준다.

```
create database db_codingrecipe;  
create user user_codingrecipe@localhost identified by '1234';  
grant all privileges on db_codingrecipe.* to user_codingrecipe;
```

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Query 1

```

1 • create database db_codingrecipe;
2 • create user user_codingrecipe@localhost identified by '1234';
3 • grant all privileges on db_codingrecipe.* to user_codingrecipe@localhost;

```

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	15:40:34	create database db_codingrecipe	1 row(s) affected	0.000 sec
2	15:40:46	create database db_codingrecipe	Error Code: 1007. Can't create database 'db_codingrecipe'; database exists	0.000 sec
3	15:43:01	create user user_codingrecipe@localhost identified by '1234'	0 row(s) affected	0.031 sec
4	15:43:22	grant all privileges on db_codingrecipe.* to user_codingrecipe@localhost	0 row(s) affected	0.016 sec

MySQL Workbench

Local instance MySQL80

File Edit View Database Tools Scripting Help

Welcome to MySQL Workbench

MySQL Workbench is the official graphical user interface (GUI) tool for MySQL. It allows you to design, create and browse your database schemas, work with database objects and insert data as well as design and run SQL queries to work with stored data. You can also migrate schemas and data from other database vendors to your MySQL database.

[Browse Documentation >](#) [Read the Blog >](#) [Discuss on the Forums >](#)

MySQL Connections

Local instance MySQL80

- root
- localhost:3307

codingrecipe

- user_codingre...
- 127.0.0.1:3307

Manage Server Connections

MySQL Connections

- Local instance MySQL80
- codingrecipe**

Connection Name: codingrecipe

Connection Remote Management System Profile

Connection Method: Standard (TCP/IP) Method to use to connect to the RDBMS

Parameters SSL Advanced

Hostname: 127.0.0.1 Port: 3307 Name or IP address of the server host - and TCP/IP port.

Username: user_codingrecipe Name of the user to connect with.

Password: Store in Vault ... Clear The user's password. Will be requested later if it's not set.

Default Schema: db_codingrecipe The schema to use as default schema. Leave blank to select it later.

New Delete Duplicate Move Up Move Down Test Connection Close

Test Connection

MySQL Workbench



Successfully made the MySQL connection

Information related to this connection:

Host: 127.0.0.1

Port: 3307

User: user_codingrecipe

SSL: enabled with TLS_AES_128_GCM_SHA256

A successful MySQL connection was made with the parameters defined for this connection.

OK

이렇게 뜨면 성공!!!!!!

db table 만드는 쿼리.

```
drop table if exists member_table;

create table member_table(
    id bigint primary key auto_increment,
    memberEmail varchar(20) unique,
    memberPassword varchar(20),
    memberName varchar(20),
    memberAge int,
    memberMobile varchar(30)
);


select * from member_table;
```

MemberRepository

```
import com.codingrecipe.project01.dto.MemberDTO;
import lombok.RequiredArgsConstructor;
import org.mybatis.spring.SqlSessionTemplate;
import org.springframework.stereotype.Repository;

2 usages
@Repository
@RequiredArgsConstructor
public class MemberRepository { //Repository class는 DB쪽과 연관이 있다. 우리는 Mybatis를
    private final SqlSessionTemplate sql;

    1 usage
    public int save(MemberDTO memberDTO) {
        System.out.println("memberDTO = " + memberDTO);
        return sql.;
    }
}
```

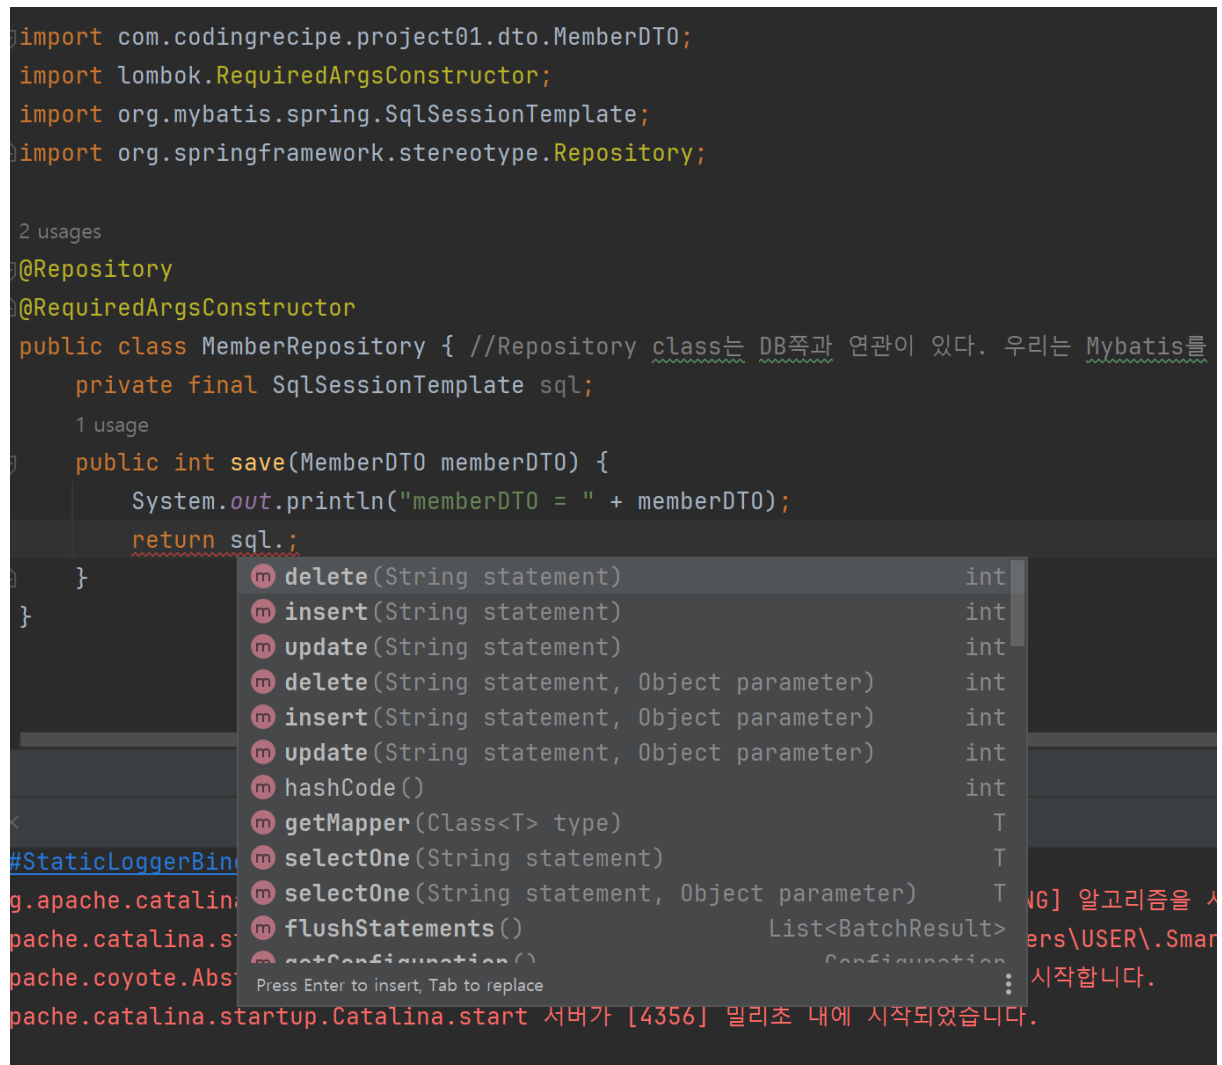

@RequiredArgsConstructor과 private final SqlSessionTemplate을 받으면 sql.을 찍어보면 아래와 같이 여러 crud를 위한 메서드를 제공해준다. 지금은 저장을 해야하기 때문에 insert를 사용한다.

0816 계속되는 오류 수정

- Mysql을 설치하고 서버를 실행하면 자꾸 오류가 발생하였다. 원인은 내가 설정한 경로와 xml에서 설정한 경로가 다르기 때문이었다.
- 두 번째 오류로는

```
<bean id="dataSource"
      class="org.springframework.jdbc.datasource.DriverMa
      <property name="driverClassName" value="com.mysql.cj.
      <property name="url" value="jdbc:mysql://localhost:33
      <property name="username" value="user_codingrecipe"/>
      <property name="password" value="1234"/>
    </bean>
```

위의 포트번호가 3306으로 되어있었다. 나는 MariaDB를 깔았었기때문에 Mysql을 다운 받을때 포트를 3307로 설정해두었는데 bean에서 변경을 안해뒀었다.

그리고 가장 중요한 부분은 내가 웹 사이트에서 이름, 메일 등등을 입력을 하면 console창에서는 찍히는데 자꾸만 에러가 뜨고 DB에 안들어가는 것이다..... 이유를 찾아보니 **RSA 암호화**와 관련된 오류였다.

url부분 뒤쪽에 allowPublicKeyRetrieval=true 옵션을 추가하여 클라이언트가 서버의 RSA 공개키를 자동으로 가져와서 인증 과정에서 사용할 수 있게 만들어준다.

하지만!! 이렇게 하면 보안상 취약점(공개키 자동 획득, 중간자 공격, 공개키 핀닝 등)이 발생할 수 있으니 SSL/TLS 설정을 활성화 해주는 것이 좋다!

```
<property name="url" value="jdbc:mysql://localhost:3307/db_co
```

ssl설정을 활성화 해주었다.