

0814~ 0815

글 입력해서

The screenshot shows a web browser window with two tabs: 'ChatGPT' and 'save'. The address bar displays 'localhost:1234/member/save'. Below the address bar, there is a form with five input fields and one button. The input fields are labeled '이메일' (Email), '비밀번호' (Password), '이름' (Name), '나이' (Age), and '전화번호' (Phone Number). The button is labeled '회원가입' (Sign Up). The browser's developer tools are visible at the bottom.

아래와 같이 받으면 성공

```

Run: Tomcat
Console
Tomcat Localhost Log
Tomcat Access Log
SLF4J: Defaulting to no-operation (NOP) logger implementation
SLF4J: See http://www.slf4j.org/codes.html#StaticLoggerBinder for further details.
15-Aug-2024 14:15:15.048 WARNING [main] org.apache.catalina.util.SessionIdGeneratorBase.createSecureRandom 알고리즘을 사용하여, 세션 ID를 생성하기 위한 SecureRandom
15-Aug-2024 14:15:16.344 INFO [main] org.apache.catalina.startup.HostConfig.deployDescriptor 배치 descriptor [C:\Users\USER\SmartTomcat\springframework_setting_01\spr
15-Aug-2024 14:15:16.352 INFO [main] org.apache.coyote.AbstractProtocol.start 프로토콜 핸들러 ["http-nio-1234"]용(종) 시작합니다.
15-Aug-2024 14:15:16.484 INFO [main] org.apache.catalina.startup.Catalina.start 서버가 [4356] 밀리초 내에 시작되었습니다.
http://localhost:1234/
memberDTO = MemberDTO(id=null, memberEmail=aa, memberPassword=aa, memberName=aa, memberAge=1212, memberMobile=010-1234-1234)
Version Control Run TODO Problems Terminal Services Build

```

MemberController

```
package com.codingrecipe.project01.controller;
```

```

import com.codingrecipe.project01.dto.MemberDTO;
import com.codingrecipe.project01.service.MemberService;
import lombok.RequiredArgsConstructor;
import org.springframework.stereotype.Controller;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.ModelAttribute;
import org.springframework.web.bind.annotation.PostMapping;
import org.springframework.web.bind.annotation.RequestMapping;

@Controller
@RequestMapping("/member")
@RequiredArgsConstructor
public class MemberController {
    private final MemberService memberService;

    //    @GetMapping("/member/save") // /member/member/save
    @GetMapping("/save")
    public String saveForm() {
        return "save";
    }

    @PostMapping("/save")
    public String save(@ModelAttribute MemberDTO memberDTO) {
        int saveResult = memberService.save(memberDTO);
        if (saveResult > 0) {    // 그 리턴값이 0보다 크냐 따져서
            return "login"; //가입이 성공했다는 케이스
        } else {
            return "save"; // 가입이 실패했다는 케이스
        }
    }
}

```

MemberService

```

package com.codingrecipe.project01.service;

import com.codingrecipe.project01.dto.MemberDTO;
import com.codingrecipe.project01.repository.MemberRepository;

```

```

import lombok.RequiredArgsConstructor;
import org.springframework.stereotype.Service;

@Service
@RequiredArgsConstructor
public class MemberService {
    private final MemberRepository memberRepository;

    public int save(MemberDTO memberDTO) {
        return memberRepository.save(memberDTO);    //service
    }
}

```

MemberRepository

```

package com.codingrecipe.project01.repository;

import com.codingrecipe.project01.dto.MemberDTO;
import org.springframework.stereotype.Repository;

@Repository
public class MemberRepository { //Repository class는 DB쪽과 연관
    public int save(MemberDTO memberDTO) {
        System.out.println("memberDTO = " + memberDTO);
        return 0;
    }
}

```

MemberDTO

```

package com.codingrecipe.project01.dto;

import lombok.Getter;
import lombok.Setter;
import lombok.ToString;

@Getter
@Setter

```

```
@ToString
public class MemberDTO {
    private Long id;
    private String memberEmail;
    private String memberPassword;
    private String memberName;
    private int memberAge;
    private String memberMobile;
}
```

save.jsp

```
<%@ page contentType="text/html; charset=UTF-8" language="java" %>
<html>
<head>
    <title>save</title>
</head>
<body>
    <form action="/member/save" method="post">
        <input type="text" name="memberEmail" placeholder="이메일" />
        <input type="text" name="memberPassword" placeholder="비밀번호" />
        <input type="text" name="memberName" placeholder="이름" />
        <input type="text" name="memberAge" placeholder="나이" />
        <input type="text" name="memberMobile" placeholder="전화번호" />
        <input type="submit" value="회원가입" />
    </form>
</body>
</html>
```

servlet-context.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:mvc="http://www.springframework.org/schema/mvc"
    xmlns:context="http://www.springframework.org/schema/context"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
        http://www.springframework.org/sch
```

```

http://www.springframework.org/schema/beans
http://www.springframework.org/schema/context
http://www.springframework.org/schema/tx
http://www.springframework.org/schema/tx

<mvc:annotation-driven />

<!-- Handles HTTP GET requests for /resources/** by efficiently serving up static resources in the "/resources" web resource directory -->
<mvc:resources mapping="/resources/**" location="/resources/" />

<!-- Resolves views selected for rendering by @Controller to the corresponding resource in the "WEB-INF/views" package -->
<bean class="org.springframework.web.servlet.view.InternalResourceViewResolver" />
    <property name="prefix" value="/WEB-INF/views/" />
    <property name="suffix" value=".jsp" />
</bean>

<!-- 프로젝트 패키지이름 확인 -->
<context:component-scan base-package="com.codingrecipe.project" />

</beans>

```

root-context.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<beans xmlns="http://www.springframework.org/schema/beans"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:jdbc="http://www.springframework.org/schema/jdbc"
    xmlns:tx="http://www.springframework.org/schema/tx"
    xsi:schemaLocation="http://www.springframework.org/schema/beans
        http://www.springframework.org/schema/beans http://www.springframework.org/schema/tx
        http://www.springframework.org/schema/tx http://www.springframework.org/schema/tx" />

<!-- 데이터베이스 이름 및 계정 확인 -->
<bean id="dataSource"
    class="org.springframework.jdbc.datasource.DriverManagerDataSource" />
    <property name="driverClassName" value="com.mysql.cj.jdbc.Driver" />
    <property name="url" value="jdbc:mysql://localhost:3306/codingrecipe" />
    <property name="username" value="user_codingrecipe" />

```

```

        <property name="password" value="1234"/>
    </bean>

    <!-- 파일 모두 생성했는지 확인 -->
    <bean id="sqlSessionFactory" class="org.mybatis.spring.SqlSessionFac
        <property name="dataSource" ref="dataSource"/>
        <property name="configLocation" value="classpath:/my
        <property name="mapperLocations" value="classpath:/ma
    </bean>

    <bean id="sqlSession" class="org.mybatis.spring.SqlSession
        <constructor-arg name="sqlSessionFactory" ref="sqlSes
    </bean>

    <bean id="transactionManager"
        class="org.springframework.jdbc.datasource.DataSource
        <property name="dataSource" ref="dataSource" />
    </bean>

    <bean id="multipartResolver"
        class="org.springframework.web.multipart.commons.CommonsMultipartReso

        <property name="defaultEncoding" value="UTF-8" />
        <property name="maxUploadSize" value="10000000" />

    </bean>


    <tx:annotation-driven transaction-manager="transactionMan

</beans>


```

2-2강 회원가입

Mysql을 설치하는데 이미 MariaDB가 깔려있어서 3306포트충돌이 났다. MariaDB를 중지하거나 포트를 변경하고 설치해도 되는데 나는 그냥 Mysql설치포트를 3306에서 3307로 바꿔주었다.

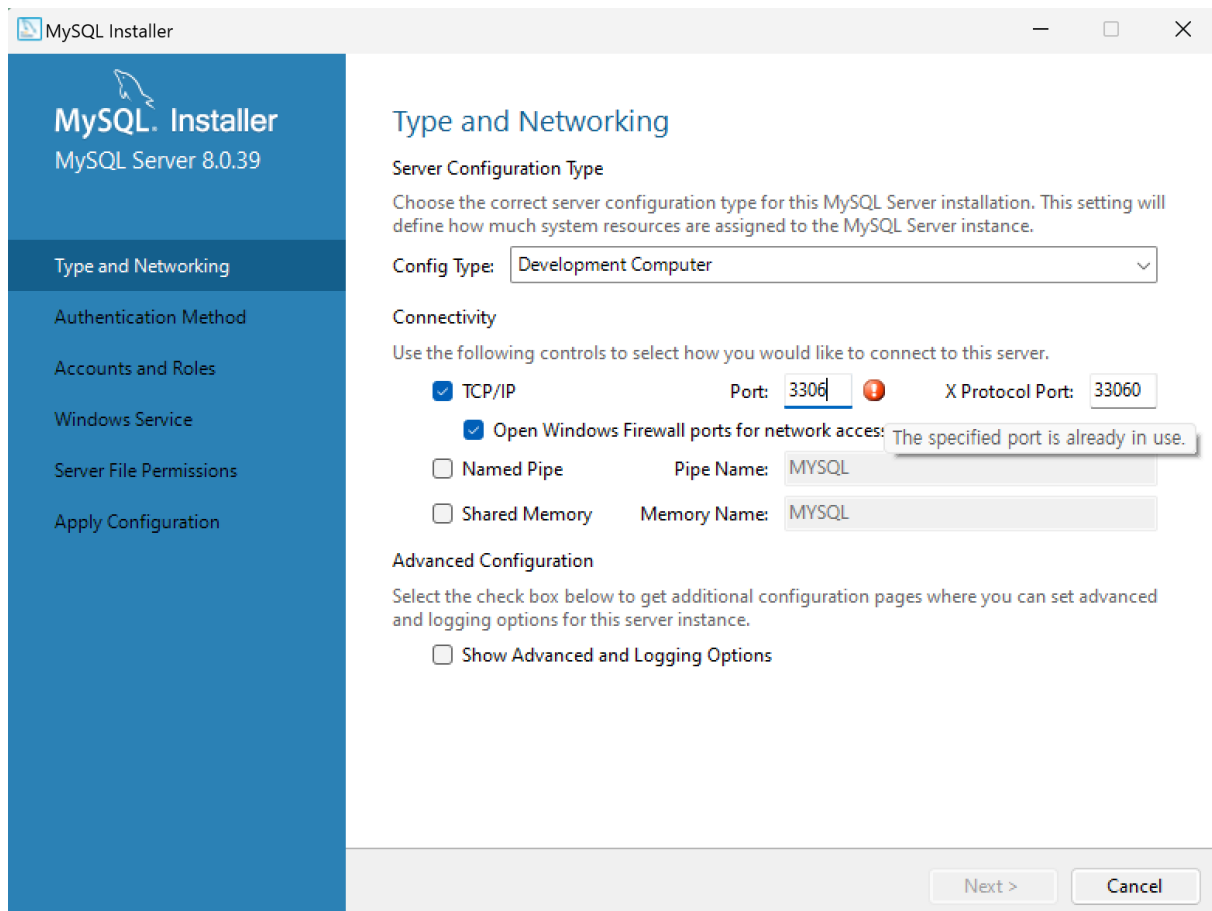



(변경전)

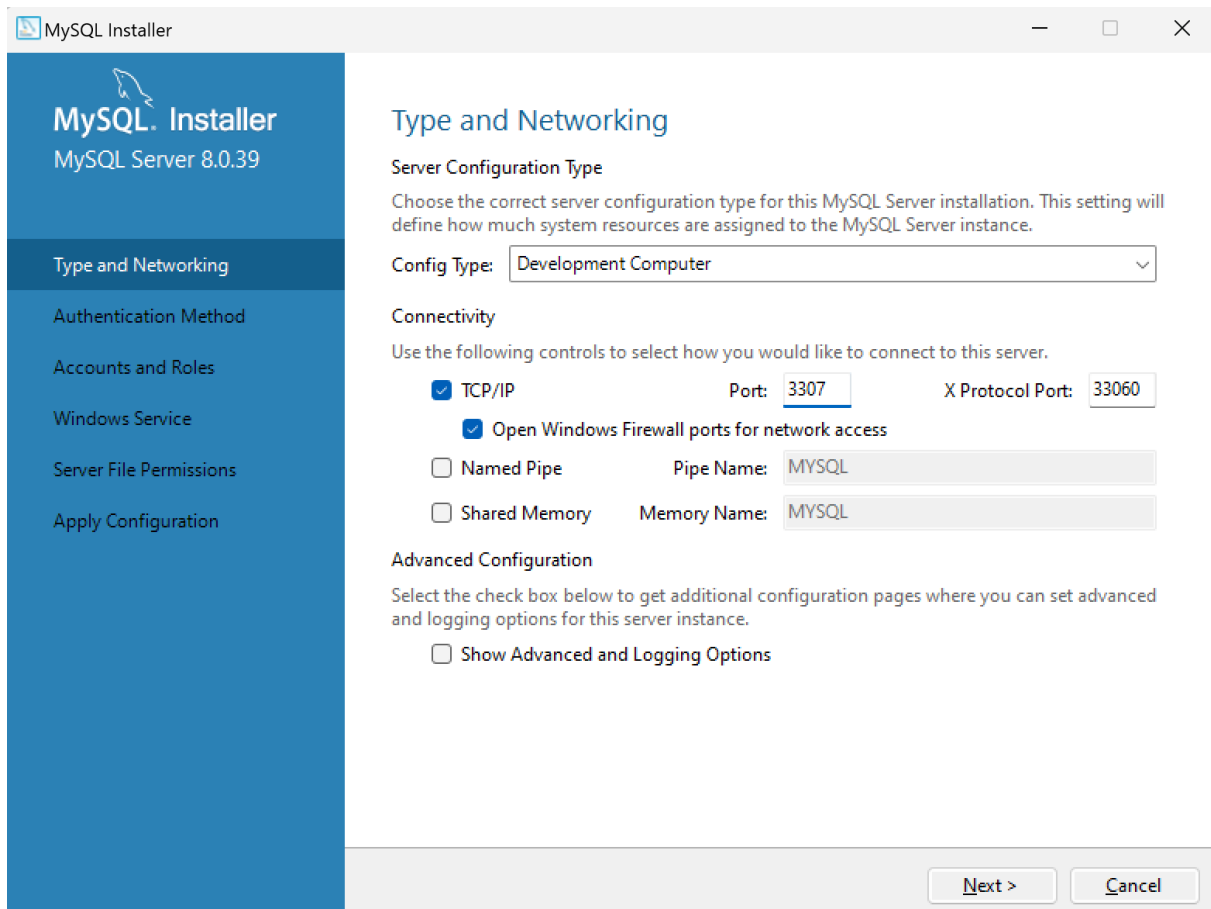


(변경후)

설치해준 후 root 에서 user와 권한등을 설정해준다.

```
create database db_codingrecipe;  
create user user_codingrecipe@localhost identified by '1234';  
grant all privileges on db_codingrecipe.* to user_codingrecipe;
```

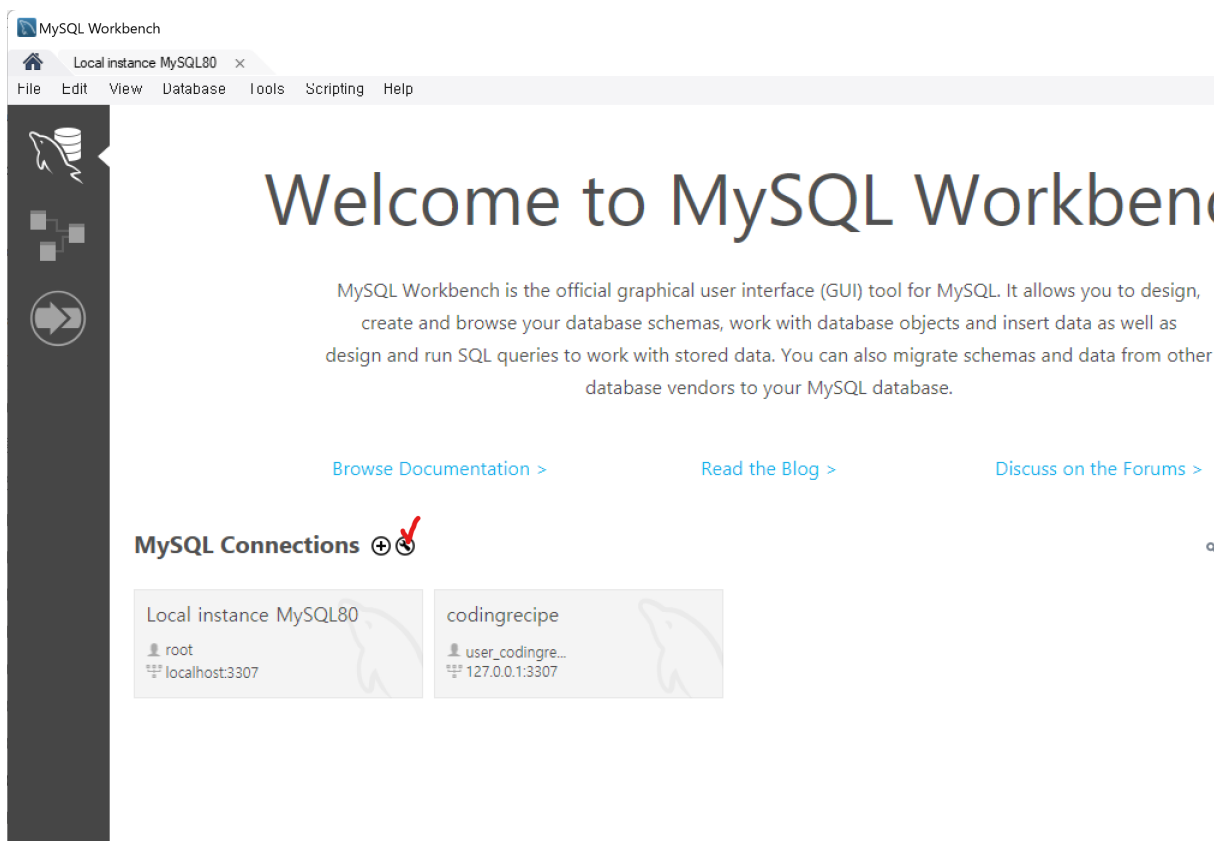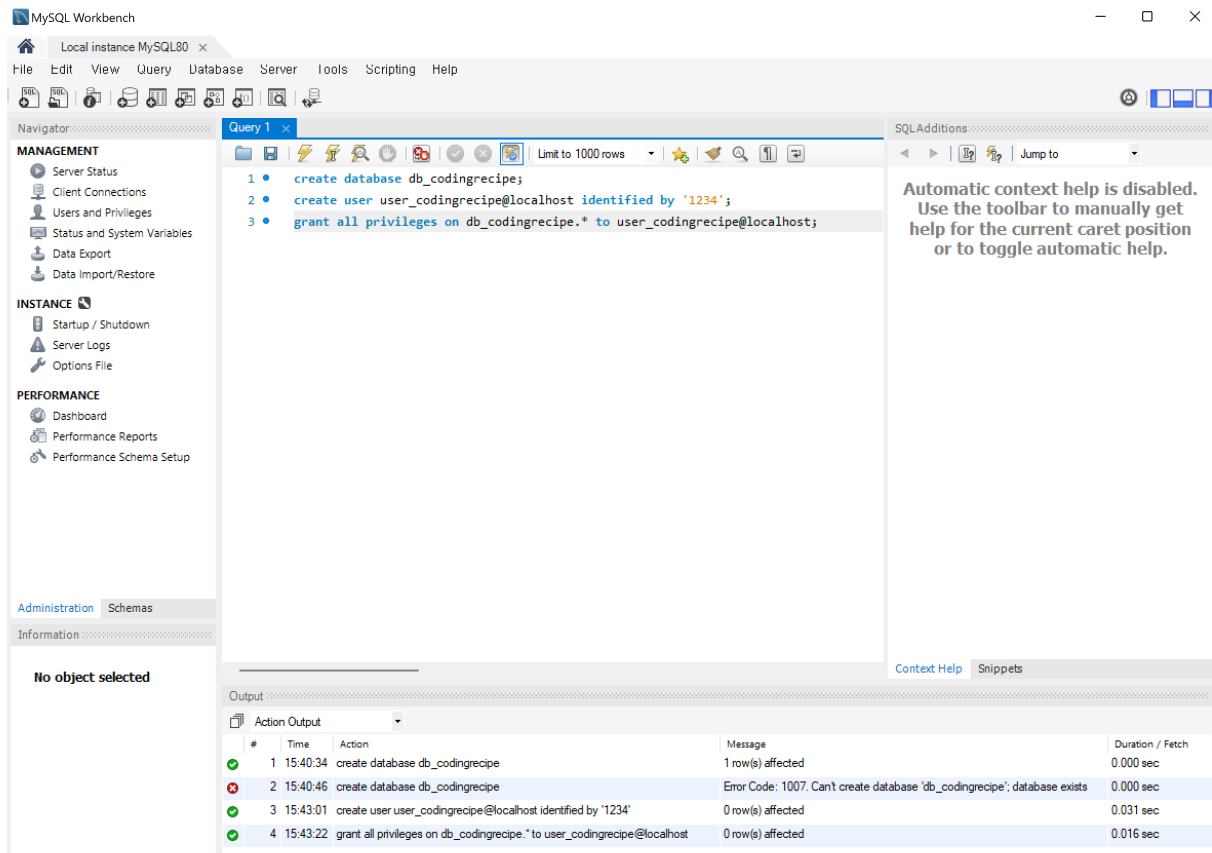

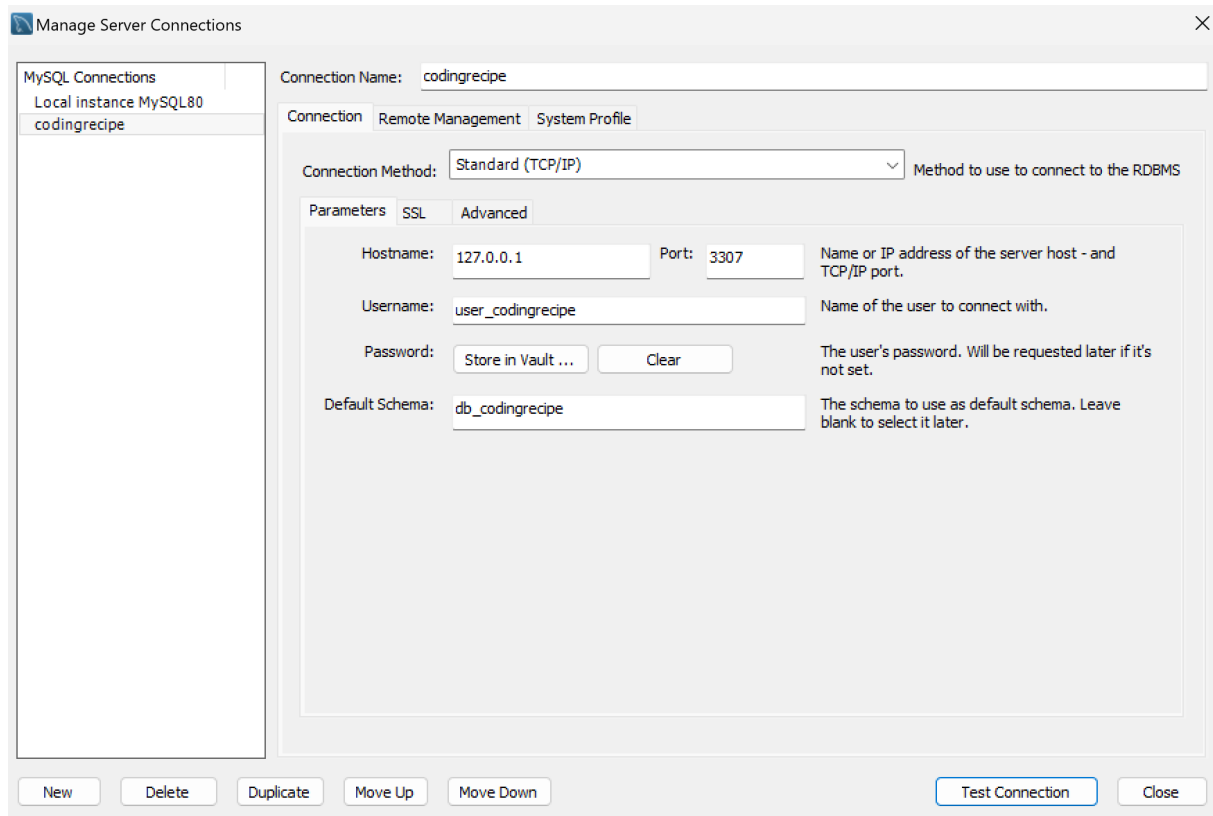

Test Connection

MySQL Workbench



Successfully made the MySQL connection

Information related to this connection:

Host: 127.0.0.1

Port: 3307

User: user_codingrecipe

SSL: enabled with TLS_AES_128_GCM_SHA256

A successful MySQL connection was made with the parameters defined for this connection.

OK

이렇게 뜨면 성공!!!!!!

db table 만드는 쿼리.

```
drop table if exists member_table;

create table member_table(
    id bigint primary key auto_increment,
    memberEmail varchar(20) unique,
    memberPassword varchar(20),
    memberName varchar(20),
    memberAge int,
    memberMobile varchar(30)
);

select * from member_table;
```

MemberRepository

```
import com.codingrecipe.project01.dto.MemberDTO;
import lombok.RequiredArgsConstructor;
import org.mybatis.spring.SqlSessionTemplate;
import org.springframework.stereotype.Repository;

2 usages
@Repository
@RequiredArgsConstructor
public class MemberRepository { //Repository class는 DB쪽과 연관이 있다. 우리는 Mybatis를
    private final SqlSessionTemplate sql;

    1 usage
    public int save(MemberDTO memberDTO) {
        System.out.println("memberDTO = " + memberDTO);
        return sql.;
    }
}

m delete(String statement) int
m insert(String statement) int
m update(String statement) int
m delete(String statement, Object parameter) int
m insert(String statement, Object parameter) int
m update(String statement, Object parameter) int
m hashCode() int
m getMapper(Class<T> type) T
m selectOne(String statement) T
m selectOne(String statement, Object parameter) T
m flushStatements() List<BatchResult>
m getConfiguration() Configuration
Press Enter to insert, Tab to replace
: 시작합니다.
g.apache.catalina.startup.Catalina.start 서버가 [4356] 밀리초 내에 시작되었습니다.
```

@RequiredArgsConstructor과 private final SqlSessionTemplate을 받으면 sql.을 찍어보면 아래와 같이 여러 crud를 위한 메서드를 제공해준다. 지금은 저장을 해야하기 때문에 insert를 사용한다.