

SH1106 Display Driver - Kala, Jaraczewski

Generated by Doxygen 1.9.2

1 Hierarchical Index	1
1.1 Class Hierarchy	1
2 Class Index	2
2.1 Class List	2
3 File Index	2
3.1 File List	2
4 Class Documentation	3
4.1 MonochromeView::ConstStorageView< WIDTH, HEIGHT > Class Template Reference	3
4.1.1 Detailed Description	5
4.1.2 Constructor & Destructor Documentation	6
4.2 MonochromeView::ConstView Class Reference	6
4.2.1 Detailed Description	8
4.2.2 Constructor & Destructor Documentation	8
4.2.3 Member Function Documentation	10
4.3 DisplayComm::DisplayCommIf Class Reference	11
4.3.1 Detailed Description	11
4.3.2 Member Function Documentation	11
4.4 DisplayComm::DisplayDataCmdIf Class Reference	12
4.4.1 Detailed Description	13
4.5 MonochromeGraphicDisplay::DisplayDriverIf Class Reference	13
4.5.1 Detailed Description	14
4.5.2 Member Function Documentation	14
4.6 DisplayComm::DisplayResetIf Class Reference	16
4.6.1 Detailed Description	16
4.7 MonochromeView::DynamicStorageView< WIDTH, HEIGHT > Class Template Reference	17
4.7.1 Detailed Description	18
4.7.2 Constructor & Destructor Documentation	19
4.8 MonochromeView::DynamicView Class Reference	19
4.8.1 Detailed Description	21
4.8.2 Constructor & Destructor Documentation	22
4.8.3 Member Function Documentation	22
4.9 DisplayComm::Factory Class Reference	24
4.9.1 Detailed Description	25
4.9.2 Member Function Documentation	25
4.10 Sh1106::Factory Class Reference	26
4.10.1 Detailed Description	27
4.10.2 Member Function Documentation	27
4.11 MonochromeText::MonochromeFont Class Reference	29
4.11.1 Detailed Description	29
4.11.2 Constructor & Destructor Documentation	29

4.11.3 Member Function Documentation	30
4.12 MonochromeText::MonochromeText Class Reference	31
4.12.1 Detailed Description	31
4.12.2 Member Function Documentation	31
4.13 MonochromeView::ViewIf Class Reference	32
4.13.1 Detailed Description	34
4.13.2 Member Function Documentation	34
5 File Documentation	35
5.1 DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayCommIf.hpp File Reference	35
5.1.1 Detailed Description	36
5.2 DisplayCommIf.hpp	36
5.3 DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayDataCmdIf.hpp File Reference	36
5.3.1 Detailed Description	36
5.4 DisplayDataCmdIf.hpp	36
5.5 DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayResetIf.hpp File Reference	37
5.5.1 Detailed Description	37
5.6 DisplayResetIf.hpp	37
5.7 DisplayApp/App/MonochromeGraphicDisplay/Inc/MonochromeGraphicDisplay/DisplayDriverIf.hpp File Reference	37
5.7.1 Detailed Description	38
5.8 DisplayDriverIf.hpp	38
5.9 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont10x7.hpp File Refer- ence	39
5.9.1 Detailed Description	39
5.10 MonochromeFont10x7.hpp	40
5.11 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont18x11.hpp File Ref- erence	40
5.11.1 Detailed Description	41
5.12 MonochromeFont18x11.hpp	41
5.13 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont26x16.hpp File Ref- erence	41
5.13.1 Detailed Description	42
5.14 MonochromeFont26x16.hpp	42
5.15 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont8x6.hpp File Refer- ence	43
5.15.1 Detailed Description	43
5.16 MonochromeFont8x6.hpp	43
5.17 DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeFont.hpp File Reference	44
5.17.1 Detailed Description	45
5.18 MonochromeFont.hpp	45
5.19 DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeText.hpp File Reference	45
5.19.1 Detailed Description	46
5.20 MonochromeText.hpp	46

5.21 DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstStorageView.hpp File Reference . .	47
5.21.1 Detailed Description	47
5.22 ConstStorageView.hpp	48
5.23 DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstView.hpp File Reference	48
5.23.1 Detailed Description	49
5.24 ConstView.hpp	49
5.25 DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicStorageView.hpp File Reference	50
5.25.1 Detailed Description	50
5.26 DynamicStorageView.hpp	50
5.27 DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicView.hpp File Reference	51
5.27.1 Detailed Description	52
5.28 DynamicView.hpp	52
5.29 DisplayApp/App/MonochromeView/Inc/MonochromeView/ViewIf.hpp File Reference	53
5.29.1 Detailed Description	54
5.30 ViewIf.hpp	54
5.31 DisplayApp/App/DisplayComm/Inc/DisplayComm/Factory.hpp File Reference	55
5.31.1 Detailed Description	55
5.32 Factory.hpp	56
5.33 Factory.hpp	56
Index	59

1 Hierarchical Index

1.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

DisplayComm::DisplayCommIf	11
DisplayComm::DisplayDataCmdIf	12
MonochromeGraphicDisplay::DisplayDriverIf	13
DisplayComm::DisplayResetIf	16
DisplayComm::Factory	24
Sh1106::Factory	26
MonochromeText::MonochromeFont	29
MonochromeText::MonochromeText	31
MonochromeView::ViewIf	32
MonochromeView::ConstView	6
MonochromeView::ConstStorageView< WIDTH, HEIGHT >	3

MonochromeView::DynamicView	19
MonochromeView::DynamicStorageView< WIDTH, HEIGHT >	17

2 Class Index

2.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

MonochromeView::ConstStorageView< WIDTH, HEIGHT >	3
MonochromeView::ConstView Constant view	6
DisplayComm::DisplayCommIf Interface for communication with display	11
DisplayComm::DisplayDataCmdIf Interface for changing mode of the display	12
MonochromeGraphicDisplay::DisplayDriverIf Diver interface of graphical screens	13
DisplayComm::DisplayResetIf Interface for the resetting display	16
MonochromeView::DynamicStorageView< WIDTH, HEIGHT >	17
MonochromeView::DynamicView Dynamic view	19
DisplayComm::Factory Factory for display communication layer	24
Sh1106::Factory Factory of SH1106 drivers	26
MonochromeText::MonochromeFont Monochrome font	29
MonochromeText::MonochromeText Monochrome text	31
MonochromeView::ViewIf View interface	32

3 File Index

3.1 File List

Here is a list of all documented files with brief descriptions:

DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayCommIf.hpp	35
---	-----------


DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayDataCmdIf.hpp	36
DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayResetIf.hpp	37
DisplayApp/App/DisplayComm/Inc/DisplayComm/Factory.hpp	55
DisplayApp/App/MonochromeGraphicDisplay/Inc/MonochromeGraphicDisplay/DisplayDriverIf.hpp	37
DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeFont.hpp	44
DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeText.hpp	45
DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont10x7.hpp	39
DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont18x11.hpp	40
DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont26x16.hpp	41
DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont8x6.hpp	43
DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstStorageView.hpp	47
DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstView.hpp	48
DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicStorageView.hpp	50
DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicView.hpp	51
DisplayApp/App/MonochromeView/Inc/MonochromeView/ViewIf.hpp	53
DisplayApp/App/Sh1106/Inc/Sh1106/Factory.hpp	56

4 Class Documentation


4.1 MonochromeView::ConstStorageView< WIDTH, HEIGHT > Class Template Reference

```
#include <ConstStorageView.hpp>
```

Inheritance diagram for MonochromeView::ConstStorageView< WIDTH, HEIGHT >:

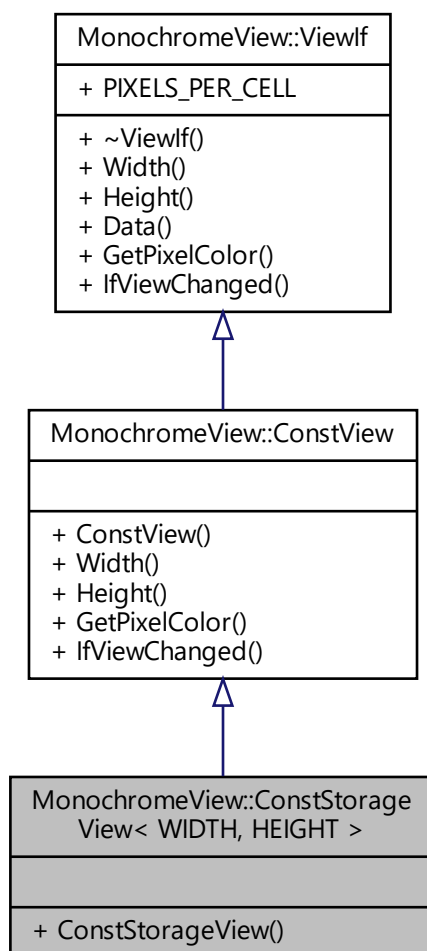

Collaboration diagram for MonochromeView::ConstStorageView< WIDTH, HEIGHT >:

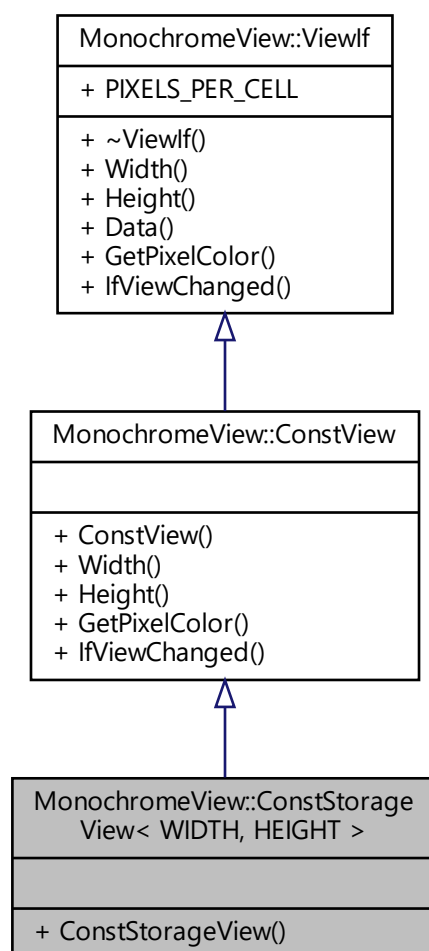

Public Member Functions

- `template<typename... ViewBytesTypes>`
[ConstStorageView](#) (ViewBytesTypes... viewBytes)

Additional Inherited Members

4.1.1 Detailed Description

```
template<size_t WIDTH, size_t HEIGHT>
class MonochromeView::ConstStorageView< WIDTH, HEIGHT >
```

Constant view with internal storage.

Template Parameters

<i>WIDTH</i>	Width of a view.
<i>HEIGHT</i>	Height of a view.

4.1.2 Constructor & Destructor Documentation

4.1.2.1 ConstStorageView() `template<size_t WIDTH, size_t HEIGHT>`
`template<typename... ViewBytesTypes>`
`MonochromeView::ConstStorageView< WIDTH, HEIGHT >::ConstStorageView (`
`ViewBytesTypes... viewBytes) [inline]`

Construct a new constant storage view object.

Template Parameters

<i>ViewBytesTypes</i>	Types of view bytes.
-----------------------	----------------------

Parameters

<i>viewBytes</i>	List of bytes to store for a view. The first element is a left-top cell (1 column and 8 rows pixels). The first column is repeated for each next 'width' pixels.
------------------	--

The documentation for this class was generated from the following file:


- DisplayApp/App/MonochromeView/Inc/MonochromeView/[ConstStorageView.hpp](#)

4.2 MonochromeView::ConstView Class Reference


Constant view.

```
#include <ConstView.hpp>
```

Inheritance diagram for MonochromeView::ConstView:

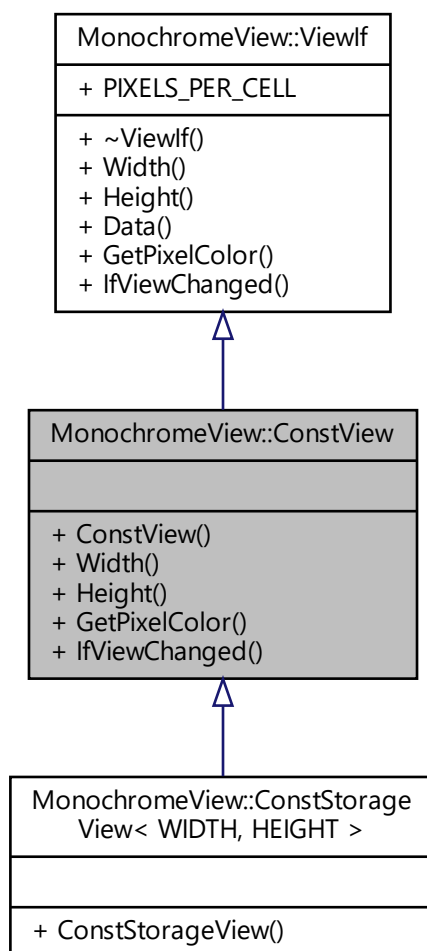

Collaboration diagram for MonochromeView::ConstView:

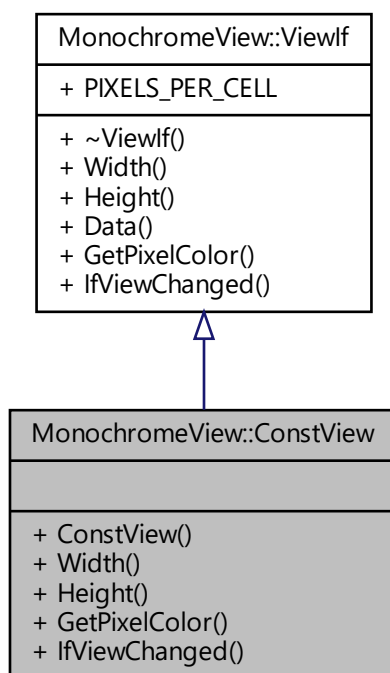

Public Member Functions

- [ConstView](#) (const uint8_t *const pBuffer, const size_t width, const size_t height)
- size_t [Width](#) () const override
Width of an view in pixels.
- size_t [Height](#) () const override
Height of an view in pixels.
- bool [GetPixelColor](#) (const size_t x, const size_t y) const override
- bool [IfViewChanged](#) () const

Additional Inherited Members

4.2.1 Detailed Description

Constant view.

4.2.2 Constructor & Destructor Documentation

4.2.2.1 ConstView() `MonochromeView::ConstView::ConstView (`
 `const uint8_t *const pBuffer,`
 `const size_t width,`
 `const size_t height)`

Construct a new constant view object.

Parameters

<i>pBuffer</i>	Pointer to the view data buffer. The first element is a left-top cell (1 column and 8 rows pixels). The first column is repeated for each next 'width' pixels.
<i>width</i>	Width of a view.
<i>height</i>	Height of a view.

4.2.3 Member Function Documentation

4.2.3.1 GetPixelColor() `bool MonochromeView::ConstView::GetPixelColor (`
 `const size_t x,`
 `const size_t y) const [override], [virtual]`

Get color of the pixel.

Parameters

<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.

Returns

Color of the pixel. [0 - black, 1 - default color].

Implements [MonochromeView::ViewIf](#).

4.2.3.2 Height() `size_t MonochromeView::ConstView::Height () const [override], [virtual]`

Height of an view in pixels.

Implements [MonochromeView::ViewIf](#).

4.2.3.3 IfViewChanged() `bool MonochromeView::ConstView::IfViewChanged () const [virtual]`

Implements [MonochromeView::ViewIf](#).

4.2.3.4 Width() `size_t MonochromeView::ConstView::Width () const [override], [virtual]`

Width of an view in pixels.

Implements [MonochromeView::ViewIf](#).

The documentation for this class was generated from the following file:


- DisplayApp/App/MonochromeView/Inc/MonochromeView/[ConstView.hpp](#)

4.3 DisplayComm::DisplayCommIf Class Reference

Interface for communication with display.

```
#include <DisplayCommIf.hpp>
```

Collaboration diagram for DisplayComm::DisplayCommIf:

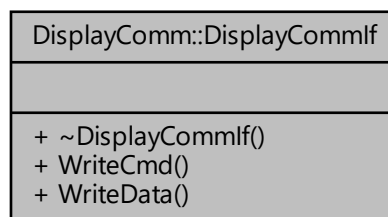

Public Member Functions

- virtual bool [WriteCmd](#) (const uint8_t cmd) const =0
- virtual bool [WriteData](#) (const uint8_t *const pData, const size_t dataSize) const =0

4.3.1 Detailed Description

Interface for communication with display.

4.3.2 Member Function Documentation

4.3.2.1 WriteCmd() `virtual bool DisplayComm::DisplayCommIf::WriteCmd (const uint8_t cmd) const [pure virtual]`

Write command to the display.

Parameters

<i>cmd</i>	Command code.
------------	---------------

Returns

Write result.

4.3.2.2 WriteData() `virtual bool DisplayComm::DisplayCommIf::WriteData (`
 `const uint8_t *const pData,`
 `const size_t dataSize) const [pure virtual]`

Write data to the display.

Parameters

<i>pData</i>	Pointer to the data buffer.
<i>dataSize</i>	Data size in bytes.

Returns

Write result.

The documentation for this class was generated from the following file:


- DisplayApp/App/DisplayComm/Inc/DisplayComm/[DisplayCommIf.hpp](#)

4.4 DisplayComm::DisplayDataCmdIf Class Reference

Interface for changing mode of the display.

```
#include <DisplayDataCmdIf.hpp>
```

Collaboration diagram for DisplayComm::DisplayDataCmdIf:

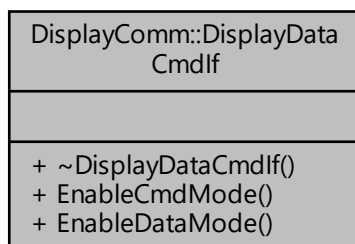

Public Member Functions

- virtual void **EnableCmdMode** () const =0
Enable command mode in the display.
- virtual void **EnableDataMode** () const =0
Enable data mode in the display.

4.4.1 Detailed Description

Interface for changing mode of the display.

The documentation for this class was generated from the following file:


- DisplayApp/App/DisplayComm/Inc/DisplayComm/[DisplayDataCmdIf.hpp](#)

4.5 MonochromeGraphicDisplay::DisplayDriverIf Class Reference

Diver interface of graphical screens.

```
#include <DisplayDriverIf.hpp>
```

Collaboration diagram for MonochromeGraphicDisplay::DisplayDriverIf:

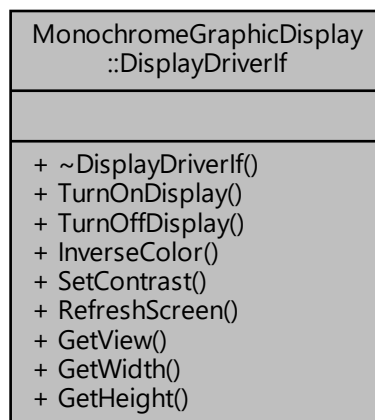**Public Member Functions**

- virtual bool [TurnOnDisplay](#) ()=0
- virtual bool [TurnOffDisplay](#) ()=0
- virtual bool [InverseColor](#) (bool inverse)=0
- virtual bool [SetContrast](#) (uint8_t value)=0
- virtual bool [RefreshScreen](#) ()=0
- virtual [MonochromeView::DynamicView](#) & [GetView](#) ()=0
- virtual size_t [GetWidth](#) ()=0
- virtual size_t [GetHeight](#) ()=0

4.5.1 Detailed Description

Diver interface of graphical screens.

4.5.2 Member Function Documentation

4.5.2.1 GetHeight() `virtual size_t MonochromeGraphicDisplay::DisplayDriverIf::GetHeight ()`
[pure virtual]

Get the display height.

Returns

Height in pixels.

4.5.2.2 GetView() `virtual MonochromeView::DynamicView & MonochromeGraphicDisplay::DisplayDriverIf::GetView ()` [pure virtual]

Get display view object.

Returns

Reference to display view object.

4.5.2.3 GetWidth() `virtual size_t MonochromeGraphicDisplay::DisplayDriverIf::GetWidth ()`
[pure virtual]

Get the display width.

Returns

Width in pixels.

4.5.2.4 InverseColor() `virtual bool MonochromeGraphicDisplay::DisplayDriverIf::InverseColor (bool inverse)` [pure virtual]

Inverse display colors.

Parameters

<i>color</i>	[0 - normal, 1 - inversed]
--------------	----------------------------

Returns

Result.

4.5.2.5 RefreshScreen() `virtual bool MonochromeGraphicDisplay::DisplayDriverIf::RefreshScreen () [pure virtual]`

Refresh screen.

Returns

Result.

4.5.2.6 SetContrast() `virtual bool MonochromeGraphicDisplay::DisplayDriverIf::SetContrast (uint8_t value) [pure virtual]`

Set the contrast.

Parameters

<i>value</i>	Contrast [0u..255u].
--------------	----------------------

Returns

Result.

4.5.2.7 TurnOffDisplay() `virtual bool MonochromeGraphicDisplay::DisplayDriverIf::TurnOffDisplay () [pure virtual]`

Turns off display.

Returns

Result.

4.5.2.8 TurnOnDisplay() `virtual bool MonochromeGraphicDisplay::DisplayDriverIf::TurnOnDisplay () [pure virtual]`

Turns on display.

Returns

Result.

The documentation for this class was generated from the following file:


- DisplayApp/App/MonochromeGraphicDisplay/Inc/MonochromeGraphicDisplay/[DisplayDriverIf.hpp](#)

4.6 DisplayComm::DisplayResetIf Class Reference

Interface for the resetting display.

```
#include <DisplayResetIf.hpp>
```

Collaboration diagram for DisplayComm::DisplayResetIf:

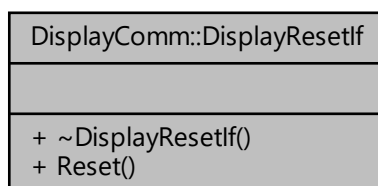

Public Member Functions

- virtual void **Reset** () const =0
Reset display.

4.6.1 Detailed Description

Interface for the resetting display.


The documentation for this class was generated from the following file:

- DisplayApp/App/DisplayComm/Inc/DisplayComm/[DisplayResetIf.hpp](#)


4.7 MonochromeView::DynamicStorageView< WIDTH, HEIGHT > Class Template Reference

```
#include <DynamicStorageView.hpp>
```

Inheritance diagram for MonochromeView::DynamicStorageView< WIDTH, HEIGHT >:

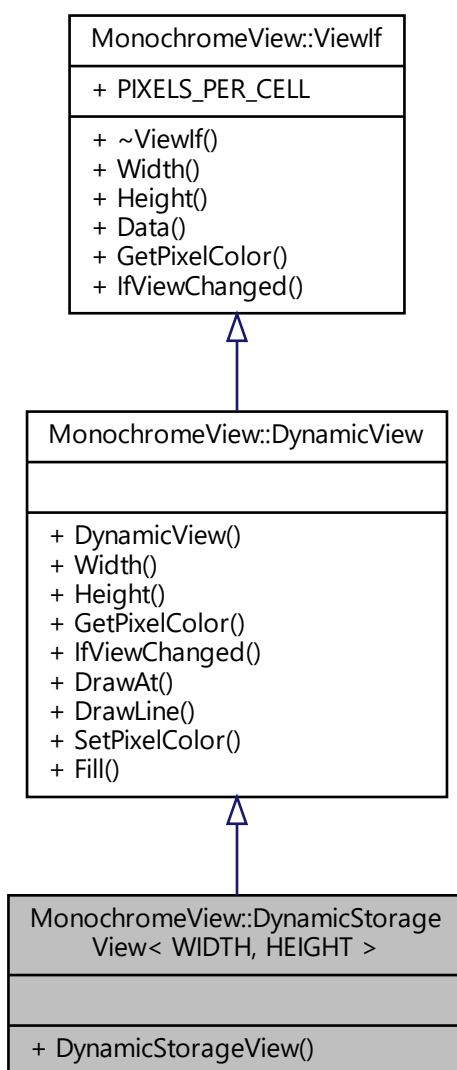

Collaboration diagram for MonochromeView::DynamicStorageView< WIDTH, HEIGHT >:

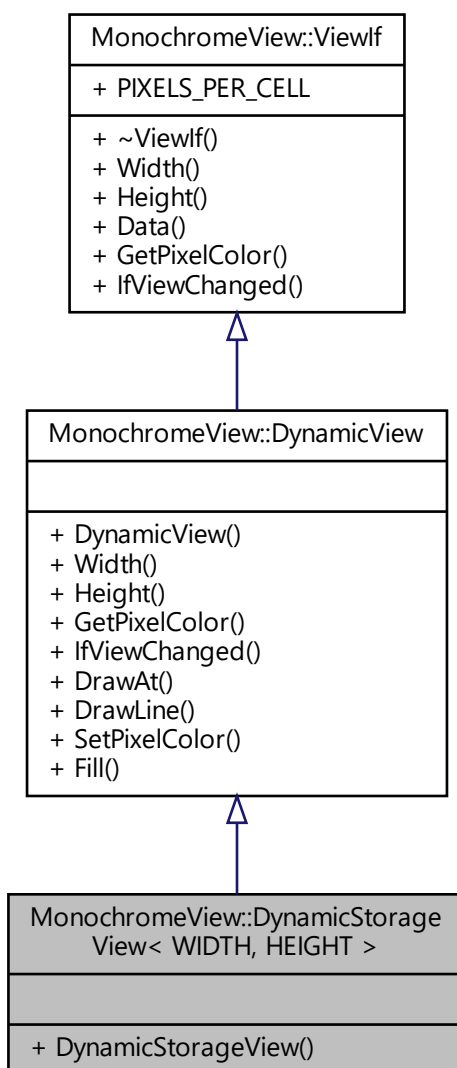

Public Member Functions

- `template<typename... ViewBytesTypes>`
[DynamicStorageView](#) (ViewBytesTypes... viewBytes)

Additional Inherited Members

4.7.1 Detailed Description

```
template<size_t WIDTH, size_t HEIGHT>
class MonochromeView::DynamicStorageView< WIDTH, HEIGHT >
```

Dynamic view with internal storage.

Template Parameters

<i>WIDTH</i>	Width of a view.
<i>HEIGHT</i>	Height of a view.

4.7.2 Constructor & Destructor Documentation

4.7.2.1 DynamicStorageView()

```
template<size_t WIDTH, size_t HEIGHT>
template<typename... ViewBytesTypes>
MonochromeView::DynamicStorageView< WIDTH, HEIGHT >::DynamicStorageView (
    ViewBytesTypes... viewBytes ) [inline]
```

Construct a new dynamic storage view object.

Template Parameters

<i>ViewBytesTypes</i>	Types of view bytes.
-----------------------	----------------------

Parameters

<i>viewBytes</i>	List of bytes to store for a view. The first element is a left-top cell (1 column and 8 rows pixels). The first column is repeated for each next 'width' pixels.
------------------	--

The documentation for this class was generated from the following file:


- DisplayApp/App/MonochromeView/Inc/MonochromeView/[DynamicStorageView.hpp](#)

4.8 MonochromeView::DynamicView Class Reference


Dynamic view.

```
#include <DynamicView.hpp>
```

Inheritance diagram for MonochromeView::DynamicView:

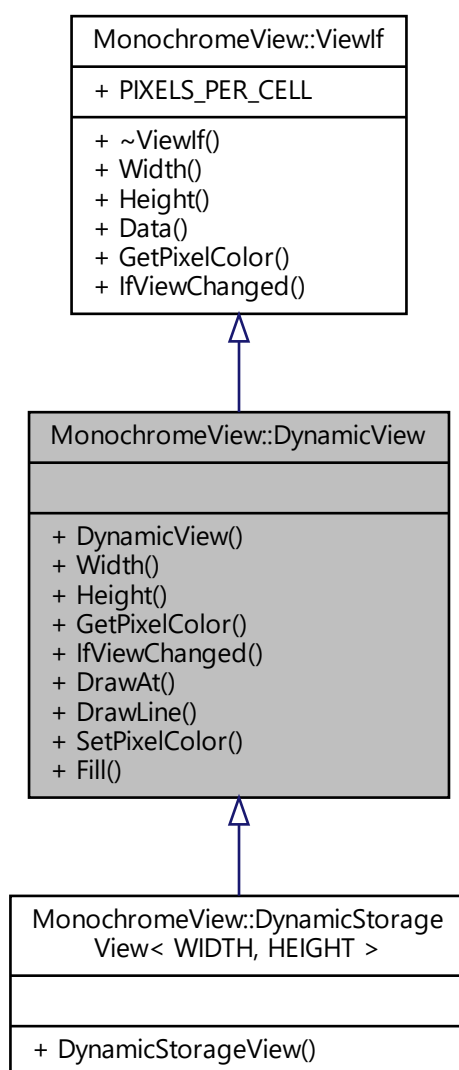

Collaboration diagram for MonochromeView::DynamicView:

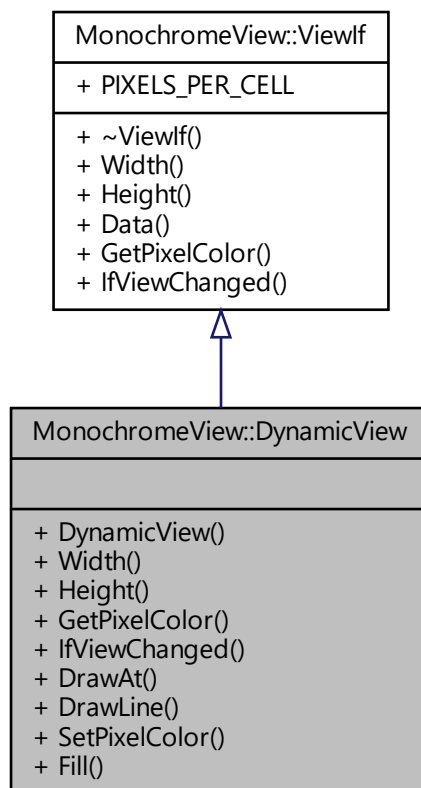

Public Member Functions

- [DynamicView](#) (uint8_t *const pBuffer, const size_t width, const size_t height)
- size_t [Width](#) () const override
Width of an view in pixels.
- size_t [Height](#) () const override
Height of an view in pixels.
- bool [GetPixelColor](#) (const size_t x, const size_t y) const override
- bool [IfViewChanged](#) () const
- void [DrawAt](#) (const int32_t x, const int32_t y, const [ViewIf](#) &rAnotherView, const uint8_t drawOption=DRAW↔_OPT_NONE)
- void [DrawLine](#) (const int32_t x1, const int32_t y1, const int32_t x2, const int32_t y2, const bool color)
- void [SetPixelColor](#) (const size_t x, const size_t y, const bool color)
- void [Fill](#) (const bool color)

Additional Inherited Members

4.8.1 Detailed Description

Dynamic view.

4.8.2 Constructor & Destructor Documentation

4.8.2.1 DynamicView() `MonochromeView::DynamicView::DynamicView (`
 `uint8_t *const pBuffer,`
 `const size_t width,`
 `const size_t height)`

Construct a new constant view object.

Parameters

<i>pBuffer</i>	Pointer to the view data buffer. The first element is a left-top cell (1 column and 8 rows pixels). The first column is repeated for each next 'width' pixels.
<i>width</i>	Width of a view.
<i>height</i>	Height of a view.

4.8.3 Member Function Documentation

4.8.3.1 DrawAt() `void MonochromeView::DynamicView::DrawAt (`
 `const int32_t x,`
 `const int32_t y,`
 `const ViewIf & rAnotherView,`
 `const uint8_t drawOption = DRAW_OPT_NONE)`

Draw at {x, y} another view.

Parameters

<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.
<i>rAnotherView</i>	View to draw.
<i>drawOption</i>	Drawing option DRAW_OPT_TRANSPOSE or DRAW_OPT_X_MIRROR or DRAW_OPT_Y_MIRROR

4.8.3.2 DrawLine() `void MonochromeView::DynamicView::DrawLine (`
 `const int32_t x1,`
 `const int32_t y1,`
 `const int32_t x2,`
 `const int32_t y2,`
 `const bool color)`

Draw line between {x1, y1} and {x2, y2} points.

Parameters

<i>x1</i>	First point position in pixles, starting from left edge.
<i>y1</i>	First point position in pixles, starting from top edge.
<i>x2</i>	Second point position in pixles, starting from left edge.
<i>y2</i>	Second point position in pixles, starting from top edge.
<i>color</i>	[0 - black, 1 - default display color]

4.8.3.3 Fill() `void MonochromeView::DynamicView::Fill (const bool color)`

Fill the whole view with a single color.

Parameters

<i>color</i>	Color to fill view. [0 - black, 1 - default color].
--------------	---

4.8.3.4 GetPixelColor() `bool MonochromeView::DynamicView::GetPixelColor (const size_t x, const size_t y) const [override], [virtual]`

Get color of the pixel.

Parameters

<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.

Returns

Color of the pixel. [0 - black, 1 - default color].

Implements [MonochromeView::ViewIf](#).

4.8.3.5 Height() `size_t MonochromeView::DynamicView::Height () const [override], [virtual]`

Height of an view in pixels.

Implements [MonochromeView::ViewIf](#).

4.8.3.6 IfViewChanged() `bool MonochromeView::DynamicView::IfViewChanged () const [virtual]`

Implements [MonochromeView::ViewIf](#).

4.8.3.7 SetPixelColor() `void MonochromeView::DynamicView::SetPixelColor (`
 `const size_t x,`
 `const size_t y,`
 `const bool color)`

Set color of a pixel at {x, y}.

Parameters

<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.
<i>color</i>	Color of the pixel. [0 - black, 1 - default color].

4.8.3.8 Width() `size_t MonochromeView::DynamicView::Width () const [override], [virtual]`

Width of an view in pixels.

Implements [MonochromeView::ViewIf](#).

The documentation for this class was generated from the following file:


- [DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicView.hpp](#)

4.9 DisplayComm::Factory Class Reference

[Factory](#) for display communication layer.

```
#include <Factory.hpp>
```

Collaboration diagram for DisplayComm::Factory:

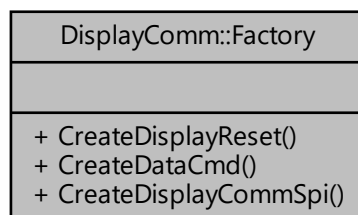

Static Public Member Functions

- static [DisplayResetIf](#) * [CreateDisplayReset](#) (GPIO_TypeDef *const pResetPort, const uint32_t resetPin)
- static [DisplayDataCmdIf](#) * [CreateDataCmd](#) (GPIO_TypeDef *const pDcPort, const uint32_t dcPin)
- static [DisplayCommIf](#) * [CreateDisplayCommSpi](#) (SPI_TypeDef *const pSpi, GPIO_TypeDef *const pCsPort, const uint32_t csPin, const [DisplayDataCmdIf](#) *const pDataCmdIf)

4.9.1 Detailed Description

[Factory](#) for display communication layer.

4.9.2 Member Function Documentation

4.9.2.1 CreateDataCmd() static [DisplayDataCmdIf](#) * DisplayComm::Factory::CreateDataCmd (GPIO_TypeDef *const *pDcPort*,
const uint32_t *dcPin*) [static]

Create a data command driver object.

Parameters

<i>pDcPort</i>	Port of D/C pin.
<i>dcPin</i>	D/C pin number.

Note

User takes responsibility for managing lifetime of returned object!

Returns

[DisplayResetIf](#)* Pointer to a newly allocated D/C driver object.

4.9.2.2 CreateDisplayCommSpi() static [DisplayCommIf](#) * DisplayComm::Factory::CreateDisplayCommSpi (SPI_TypeDef *const *pSpi*,
GPIO_TypeDef *const *pCsPort*,
const uint32_t *csPin*,
const [DisplayDataCmdIf](#) *const *pDataCmdIf*) [static]

Create a display comm object.

Parameters

<i>pSpi</i>	Pointer to the SPI interface.
<i>pCsPort</i>	Port of the chip select pin.
<i>csPin</i>	Chip select pin.
<i>pDataCmdIf</i>	Pointer to data command interface.

Note

User takes responsibility for managing lifetime of returned object!

Returns

DisplayCommIf* Pointer to a newly allocated communication driver object.

4.9.2.3 CreateDisplayReset() static [DisplayResetIf](#) * DisplayComm::Factory::CreateDisplayReset (
 GPIO_TypeDef *const *pResetPort*,
 const uint32_t *resetPin*) [static]

Create a display reset object.

Parameters

<i>pResetPort</i>	Port of the reset pin.
<i>resetPin</i>	Reset pin number.

Note

User takes responsibility for managing lifetime of returned object!

Returns

DisplayResetIf* Pointer to a newly allocated reset object.

The documentation for this class was generated from the following file:


- DisplayApp/App/DisplayComm/Inc/DisplayComm/[Factory.hpp](#)

4.10 Sh1106::Factory Class Reference

[Factory](#) of SH1106 drivers.

```
#include <Factory.hpp>
```

Collaboration diagram for Sh1106::Factory:



Static Public Member Functions

- static [MonochromeGraphicDisplay::DisplayDriverIf](#) * [Create128x32Driver](#) ([DisplayComm::DisplayCommIf](#) *const *pDisplayCommIf*, [DisplayComm::DisplayResetIf](#) *const *pDisplayResetIf*, const bool *mirrorVertically*=false, const bool *mirrorHorizontally*=false, const size_t *columnOffset*=0U)
- static [MonochromeGraphicDisplay::DisplayDriverIf](#) * [Create128x64Driver](#) ([DisplayComm::DisplayCommIf](#) *const *pDisplayCommIf*, [DisplayComm::DisplayResetIf](#) *const *pDisplayResetIf*, const bool *mirrorVertically*=false, const bool *mirrorHorizontally*=false, const size_t *columnOffset*=0U)
- static [MonochromeGraphicDisplay::DisplayDriverIf](#) * [Create128x128Driver](#) ([DisplayComm::DisplayCommIf](#) *const *pDisplayCommIf*, [DisplayComm::DisplayResetIf](#) *const *pDisplayResetIf*, const bool *mirrorVertically*=false, const bool *mirrorHorizontally*=false, const size_t *columnOffset*=0U)

4.10.1 Detailed Description

[Factory](#) of SH1106 drivers.

4.10.2 Member Function Documentation

4.10.2.1 [Create128x128Driver\(\)](#) static [MonochromeGraphicDisplay::DisplayDriverIf](#) * [Sh1106::](#)[↔](#)

```
Factory::Create128x128Driver (
    DisplayComm::DisplayCommIf *const pDisplayCommIf,
    DisplayComm::DisplayResetIf *const pDisplayResetIf,
    const bool mirrorVertically = false,
    const bool mirrorHorizontally = false,
    const size_t columnOffset = 0U ) [static]
```

Create a SH1106 driver instance for resolution 128x128 px (width x height).

Parameters

<i>pDisplayCommIf</i>	Pointer to the display communication interface.
<i>pDisplayResetIf</i>	Pointer to the display reset interface.
<i>mirrorVertically</i>	Set to true to mirror vertically.
<i>mirrorHorizontally</i>	Set to false to mirror horizontally.
<i>columnOffset</i>	Offset of the first column.

Note

User takes responsibility for managing lifetime of returned object!

Returns

Pointer to a newly allocated SH1106 driver object.

4.10.2.2 Create128x32Driver() static `MonochromeGraphicDisplay::DisplayDriverIf * Sh1106::↵`
`Factory::Create128x32Driver (`
 `DisplayComm::DisplayCommIf *const pDisplayCommIf,`
 `DisplayComm::DisplayResetIf *const pDisplayResetIf,`
 `const bool mirrorVertically = false,`
 `const bool mirrorHorizontally = false,`
 `const size_t columnOffset = 0U) [static]`

Create a SH1106 driver instance for resolution 128x32 px (width x height).

Parameters

<i>pDisplayCommIf</i>	Pointer to the display communication interface.
<i>pDisplayResetIf</i>	Pointer to the display reset interface.
<i>mirrorVertically</i>	Set to true to mirror vertically.
<i>mirrorHorizontally</i>	Set to false to mirror horizontally.
<i>columnOffset</i>	Offset of the first column.

Note

User takes responsibility for managing lifetime of returned object!

Returns

Pointer to a newly allocated SH1106 driver object.

4.10.2.3 Create128x64Driver() static `MonochromeGraphicDisplay::DisplayDriverIf * Sh1106::↵`
`Factory::Create128x64Driver (`
 `DisplayComm::DisplayCommIf *const pDisplayCommIf,`
 `DisplayComm::DisplayResetIf *const pDisplayResetIf,`
 `const bool mirrorVertically = false,`
 `const bool mirrorHorizontally = false,`
 `const size_t columnOffset = 0U) [static]`

Create a SH1106 driver instance for resolution 128x64 px (width x height).

Parameters

<i>pDisplayCommIf</i>	Pointer to the display communication interface.
<i>pDisplayResetIf</i>	Pointer to the display reset interface.
<i>mirrorVertically</i>	Set to true to mirror vertically.
<i>mirrorHorizontally</i>	Set to false to mirror horizontally.
<i>columnOffset</i>	Offset of the first column.

Note

User takes responsibility for managing lifetime of returned object!

Returns

Pointer to a newly allocated SH1106 driver object.

The documentation for this class was generated from the following file:


- DisplayApp/App/Sh1106/Inc/Sh1106/Factory.hpp

4.11 MonochromeText::MonochromeFont Class Reference

Monochrome font.

```
#include <MonochromeFont.hpp>
```

Collaboration diagram for MonochromeText::MonochromeFont:

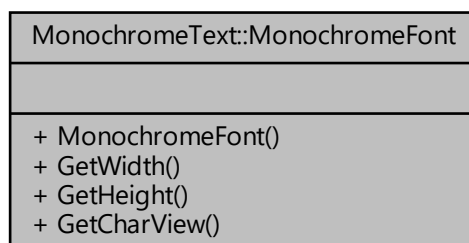**Public Member Functions**

- [MonochromeFont](#) (const uint8_t *const pCharsBytes, const size_t width, const size_t height, const size_t firstCharAsciiOffset, const size_t charsNum)
- uint8_t [GetWidth](#) () const
- uint8_t [GetHeight](#) () const
- [MonochromeView::ConstView](#) [GetCharView](#) (const char character) const

4.11.1 Detailed Description

Monochrome font.

4.11.2 Constructor & Destructor Documentation

4.11.2.1 MonochromeFont() MonochromeText::MonochromeFont::MonochromeFont (

```
const uint8_t *const pCharsBytes,
const size_t width,
const size_t height,
const size_t firstCharAsciiOffset,
const size_t charsNum )
```

Construct a new Monochrome Font object

Parameters

<i>pCharsViews</i>	Pointer to font characters bytes array. First element should has ASCII code.
<i>width</i>	Font width in pixels.
<i>height</i>	Font height in pixels.
<i>firstCharAsciiOffset</i>	Offset in ASCII table of the first character in font.
<i>charsNum</i>	Number of characters in font.

4.11.3 Member Function Documentation

4.11.3.1 GetCharView() `MonochromeView::ConstView MonochromeText::MonochromeFont::GetCharView (const char character) const`

Get character view.

Parameters

<i>character</i>	Character to get view of.
------------------	---------------------------

Returns

Character view.

4.11.3.2 GetHeight() `uint8_t MonochromeText::MonochromeFont::GetHeight () const`

Get the Height object

Returns

uint8_t Font height in pixels.

4.11.3.3 GetWidth() `uint8_t MonochromeText::MonochromeFont::GetWidth () const`

Get the Width object

Returns

uint8_t Font width in pixels.

The documentation for this class was generated from the following file:


- DisplayApp/App/MonochromeText/Inc/MonochromeText/[MonochromeFont.hpp](#)

4.12 MonochromeText::MonochromeText Class Reference

Monochrome text.

```
#include <MonochromeText.hpp>
```

Collaboration diagram for MonochromeText::MonochromeText:

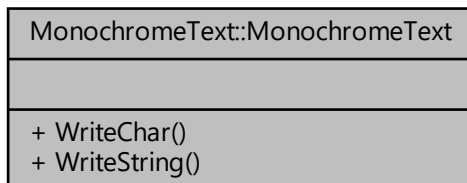

Static Public Member Functions

- static void [WriteChar](#) ([MonochromeView::DynamicView](#) &rView, const int32_t x, const int32_t y, const [MonochromeFont](#) &rFont, const char character, const uint8_t drawOption=[MonochromeView::DRAW_OPT_NONE](#))
- static void [WriteString](#) ([MonochromeView::DynamicView](#) &rView, const int32_t x, const int32_t y, const [MonochromeFont](#) &rFont, const char *const pString, const uint8_t drawOption=[MonochromeView::DRAW_OPT_NONE](#))

4.12.1 Detailed Description

Monochrome text.

4.12.2 Member Function Documentation

4.12.2.1 WriteChar() static void MonochromeText::MonochromeText::WriteChar (
[MonochromeView::DynamicView](#) & rView,
const int32_t x,
const int32_t y,
const [MonochromeFont](#) & rFont,
const char character,
const uint8_t drawOption = [MonochromeView::DRAW_OPT_NONE](#)) [static]

Write 'character' at {x, y} point in the view 'rView' using font 'rFont' and draw options 'drawOption'.

Parameters

<i>rView</i>	View to write character in.
<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.
<i>rFont</i>	Font.
<i>character</i>	Character to write.
<i>drawOption</i>	Draw options,

See also

[MonochromeView::DynamicView::DrawAt](#)

4.12.2.2 WriteString() `static void MonochromeText::MonochromeText::WriteString (`
`MonochromeView::DynamicView & rView,`
`const int32_t x,`
`const int32_t y,`
`const MonochromeFont & rFont,`
`const char *const pString,`
`const uint8_t drawOption = MonochromeView::DRAW_OPT_NONE) [static]`

Write string 'pString' at {x, y} point in the view 'rView' using font 'rFont' and draw options 'drawOption'.

Parameters

<i>rView</i>	View to write string in.
<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.
<i>rFont</i>	Font.
<i>pString</i>	Null-terminated C like string to write on the display.
<i>drawOption</i>	Draw options,

See also

[MonochromeView::DynamicView::DrawAt](#)

The documentation for this class was generated from the following file:


- DisplayApp/App/MonochromeText/Inc/MonochromeText/[MonochromeText.hpp](#)

4.13 MonochromeView::ViewIf Class Reference


View interface.

```
#include <ViewIf.hpp>
```

Inheritance diagram for MonochromeView::ViewIf:

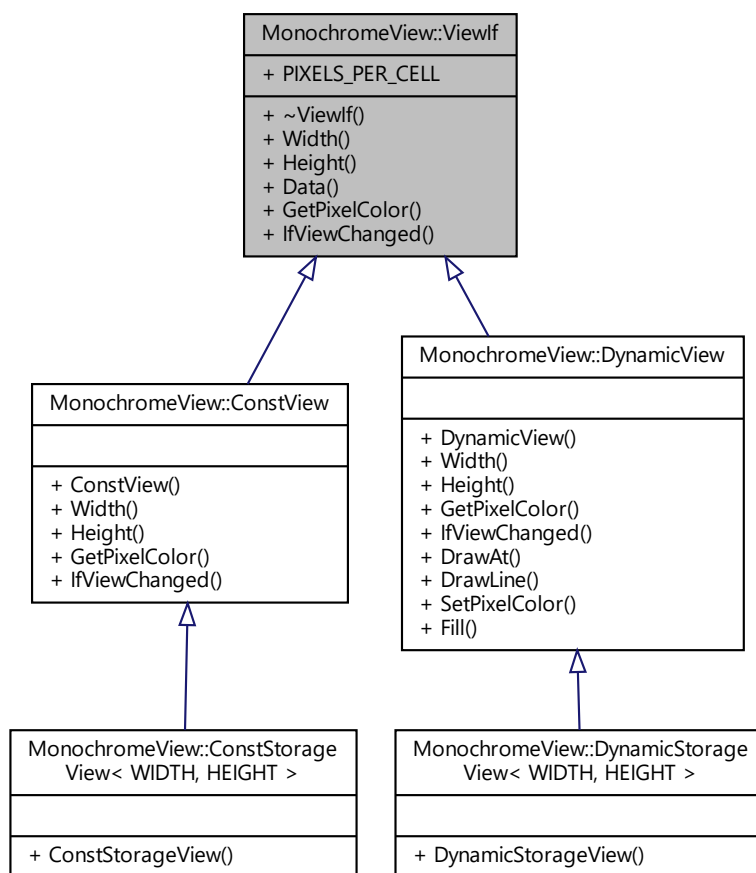

Collaboration diagram for MonochromeView::ViewIf:

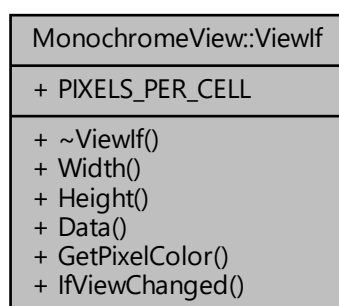

Public Member Functions

- virtual size_t [Width](#) () const =0
Width of an view in pixels.
- virtual size_t [Height](#) () const =0
Height of an view in pixels.
- virtual const uint8_t * [Data](#) () const =0
Get constant data of an view.
- virtual bool [GetPixelColor](#) (const size_t x, const size_t y) const =0
- virtual bool [IfViewChanged](#) () const =0
Check if the view has been changed since the last check.

Static Public Attributes

- static constexpr const size_t [PIXELS_PER_CELL](#) = 8U

4.13.1 Detailed Description

View interface.

4.13.2 Member Function Documentation

4.13.2.1 [GetPixelColor\(\)](#) virtual bool MonochromeView::ViewIf::GetPixelColor (const size_t x, const size_t y) const [pure virtual]

Get color of the pixel.

Parameters

<i>x</i>	Horizontal coordinate.
<i>y</i>	Vertical coordinate.

Returns

Color of the pixel. [0 - black, 1 - default color].

Implemented in [MonochromeView::ConstView](#), and [MonochromeView::DynamicView](#).

4.13.2.2 [Height\(\)](#) virtual size_t MonochromeView::ViewIf::Height () const [pure virtual]

Height of an view in pixels.

Implemented in [MonochromeView::ConstView](#), and [MonochromeView::DynamicView](#).

4.13.2.3 IfViewChanged() `virtual bool MonochromeView::ViewIf::IfViewChanged () const [pure virtual]`

Check if the view has been changed since the last check.

Implemented in [MonochromeView::ConstView](#), and [MonochromeView::DynamicView](#).

4.13.2.4 Width() `virtual size_t MonochromeView::ViewIf::Width () const [pure virtual]`

Width of an view in pixels.

Implemented in [MonochromeView::ConstView](#), and [MonochromeView::DynamicView](#).

The documentation for this class was generated from the following file:


- [DisplayApp/App/MonochromeView/Inc/MonochromeView/ViewIf.hpp](#)

5 File Documentation

5.1 DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayCommIf.hpp File Reference

```
#include <cstdint>
#include <cstddef>
```

Include dependency graph for DisplayCommIf.hpp:

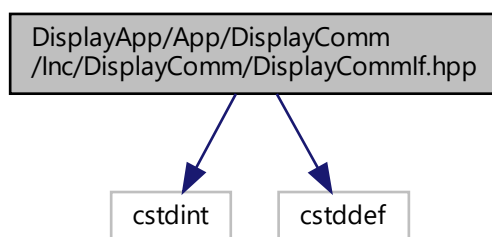

Classes

- class [DisplayComm::DisplayCommIf](#)
Interface for communication with display.

5.1.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.2 DisplayCommIf.hpp

[Go to the documentation of this file.](#)

```
1
4
5 #ifndef DISPLAY_COMM_DISPLAY_COMM_IF_HPP
6 #define DISPLAY_COMM_DISPLAY_COMM_IF_HPP
7
8 #include <stdint>
9 #include <stddef>
10
11 namespace DisplayComm
12 {
13
14     class DisplayCommIf
15     {
16     public:
17         virtual ~DisplayCommIf()
18         {
19         }
20
21         virtual bool WriteCmd(const uint8_t cmd) const = 0;
22
23         virtual bool WriteData(const uint8_t* const pData, const size_t dataSize) const = 0;
24     };
25 }
26
27 #endif
```

5.3 DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayDataCmdIf.hpp File Reference

Classes

- class [DisplayComm::DisplayDataCmdIf](#)
Interface for changing mode of the display.

5.3.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.4 DisplayDataCmdIf.hpp

[Go to the documentation of this file.](#)

```
1
4
5 #ifndef DISPLAY_COMM_DISPLAY_DATA_CMD_IF_HPP
6 #define DISPLAY_COMM_DISPLAY_DATA_CMD_IF_HPP
7
8 namespace DisplayComm
9 {
10
11     class DisplayDataCmdIf
12     {
13     public:
```

```

15     virtual ~DisplayDataCmdIf()
16     {
17     }
18
20     virtual void EnableCmdMode() const = 0;
21
23     virtual void EnableDataMode() const = 0;
24 };
25
26 }
27
28 #endif

```

5.5 DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayResetIf.hpp File Reference

Classes

- class [DisplayComm::DisplayResetIf](#)
Interface for the resetting display.

5.5.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.6 DisplayResetIf.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef DISPLAY_COMM_DISPLAY_RESET_IF_HPP
6 #define DISPLAY_COMM_DISPLAY_RESET_IF_HPP
7
8 namespace DisplayComm
9 {
10
12 class DisplayResetIf
13 {
14 public:
15     virtual ~DisplayResetIf()
16     {
17     }
18
20     virtual void Reset() const = 0;
21 };
22
23 }
24
25 #endif

```


5.7 DisplayApp/App/MonochromeGraphicDisplay/Inc/MonochromeGraphicDisplay/DisplayDriverIf.hpp File Reference

```

#include <cstdint>
#include <cstddef>

```


Include dependency graph for DisplayDriverIf.hpp:

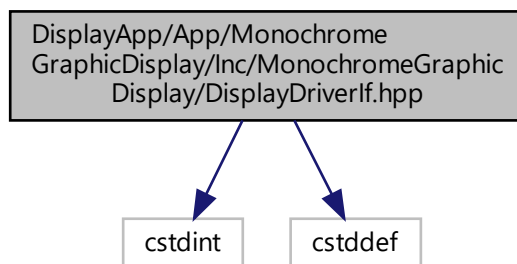

Classes

- class [MonochromeGraphicDisplay::DisplayDriverIf](#)

Diver interface of graphical screens.

5.7.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.8 DisplayDriverIf.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef MONOCHROMEGRAPHICDISPLAY_DISPLAYDRIVERIF_HPP
6 #define MONOCHROMEGRAPHICDISPLAY_DISPLAYDRIVERIF_HPP
7
8 #include <cstdint>
9 #include <cstddef>
10
11 namespace MonochromeView
12 {
13
14 class DynamicView;
15
16 }
17
18 namespace MonochromeGraphicDisplay
19 {
20
22 class DisplayDriverIf
23 {
24 public:
25     virtual ~DisplayDriverIf()
26     {
27     }
28
32     virtual bool TurnOnDisplay() = 0;
33
37     virtual bool TurnOffDisplay() = 0;
38
44     virtual bool InverseColor(bool inverse) = 0;
45
51     virtual bool SetContrast(uint8_t value) = 0;
  
```

```


52
53     virtual bool RefreshScreen() = 0;
54
55     virtual MonochromeView::DynamicView& GetView() = 0;
56
57     virtual size_t GetWidth() = 0;
58
59     virtual size_t GetHeight() = 0;
60 };
61
62 #endif

```

5.9 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont10x7.hpp File Reference

```
#include "MonochromeText/MonochromeFont.hpp"
```

Include dependency graph for MonochromeFont10x7.hpp:

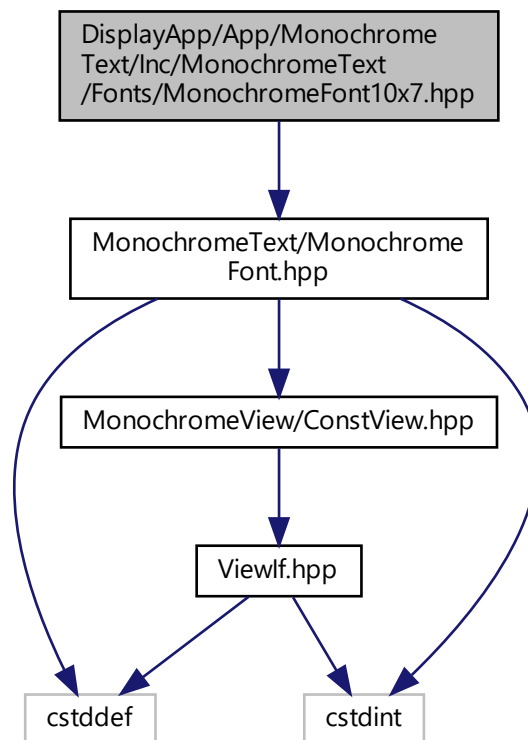

Variables

- const MonochromeFont **MonochromeText::font10x7**

5.9.1 Detailed Description

Note

Copyright (c) 2021 ArmC++ - Kala, Jaraczewski

5.10 MonochromeFont10x7.hpp

[Go to the documentation of this file.](#)


```

1
4
5 #ifndef MONOCHROMETEXT_MONOCHROMEFONT10X7_HPP
6 #define MONOCHROMETEXT_MONOCHROMEFONT10X7_HPP
7
8 #include "MonochromeText/MonochromeFont.hpp"
9
10 namespace MonochromeText
11 {
12
13 extern const MonochromeFont font10x7;
14
15 }
16
17 #endif

```

5.11 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont18x11.hpp File Reference

#include "MonochromeText/MonochromeFont.hpp"
 Include dependency graph for MonochromeFont18x11.hpp:

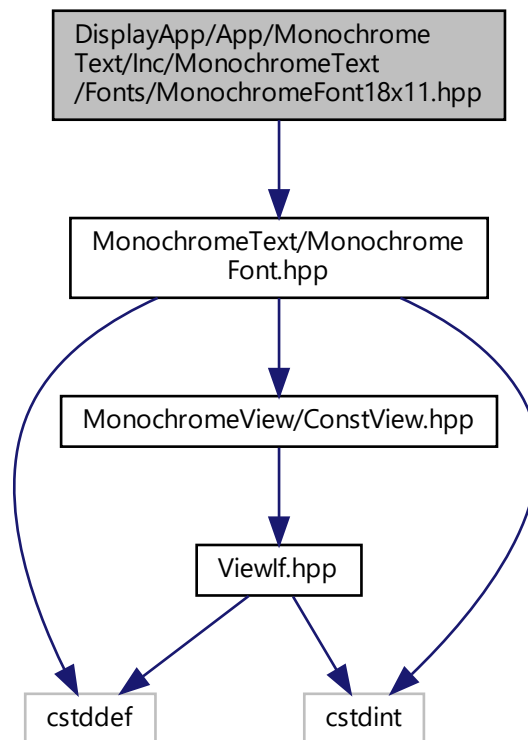

Variables

- const MonochromeFont **MonochromeText::font18x11**

5.11.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.12 MonochromeFont18x11.hpp

[Go to the documentation of this file.](#)

```


1
4
5 #ifndef MONOCHROMETEXT_MONOCHROMEFONT18X11_HPP
6 #define MONOCHROMETEXT_MONOCHROMEFONT18X11_HPP
7
8 #include "MonochromeText/MonochromeFont.hpp"
9
10 namespace MonochromeText
11 {
12
13 extern const MonochromeFont font18x11;
14
15 }
16
17 #endif

```

5.13 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont26x16.hpp File Reference

```
#include "MonochromeText/MonochromeFont.hpp"
```

Include dependency graph for MonochromeFont26x16.hpp:

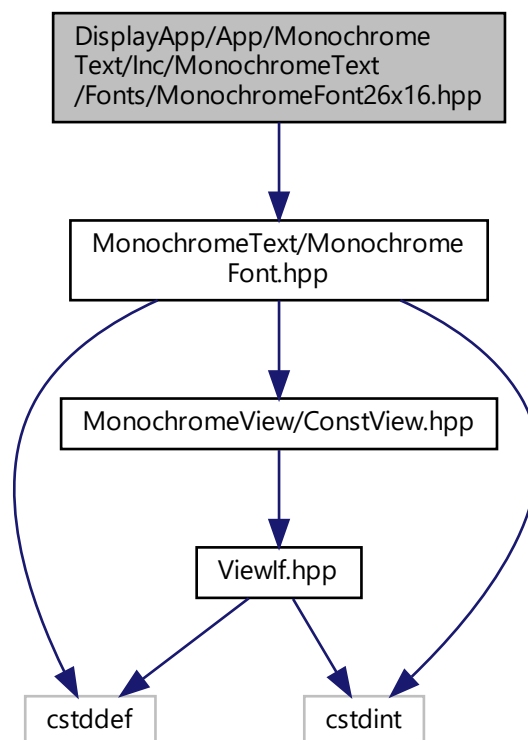

Variables

- const MonochromeFont **MonochromeText::font26x16**

5.13.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.14 MonochromeFont26x16.hpp


[Go to the documentation of this file.](#)

```
1
2
3
4
5 #ifndef MONOCHROMETEXT_MONOCHROMEFONT26X16_HPP
6 #define MONOCHROMETEXT_MONOCHROMEFONT26X16_HPP
7
8 #include "MonochromeText/MonochromeFont.hpp"
9
10 namespace MonochromeText
11 {
12
13 extern const MonochromeFont font26x16;
14
15 }
16
17 #endif
```

5.15 DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont8x6.hpp File Reference

```
#include "MonochromeText/MonochromeFont.hpp"
```

Include dependency graph for MonochromeFont8x6.hpp:

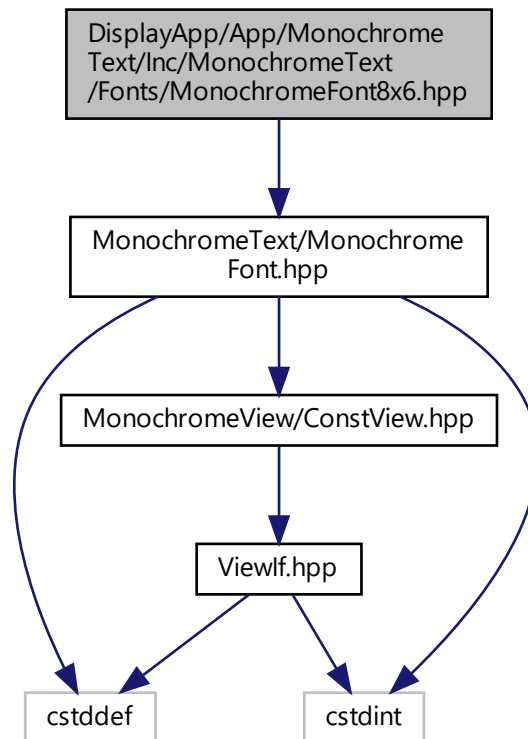

Variables

- const MonochromeFont **MonochromeText::font8x6**

5.15.1 Detailed Description

Note

Copyright (c) 2021 ArmCcpp - Kala, Jaraczewski

5.16 MonochromeFont8x6.hpp

[Go to the documentation of this file.](#)

```
1
4
5 #ifndef MONOCHROMETEXT_MONOCHROMEFONT8X6_HPP
6 #define MONOCHROMETEXT_MONOCHROMEFONT8X6_HPP
```

```

7
8 #include "MonochromeText/MonochromeFont.hpp"
9
10 namespace MonochromeText
11 {
12
13 extern const MonochromeFont font8x6;
14
15 }
16
17 #endif

```


5.17 DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeFont.hpp File Reference

```


#include <cstdint>
#include <cstddef>
#include "MonochromeView/ConstView.hpp"

```

Include dependency graph for MonochromeFont.hpp:

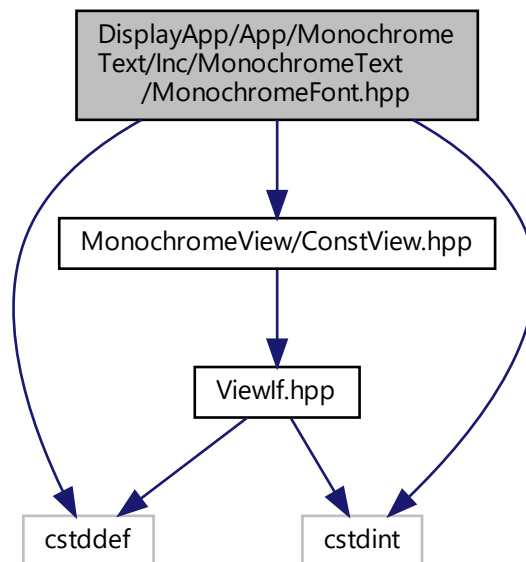

This graph shows which files directly or indirectly include this file:

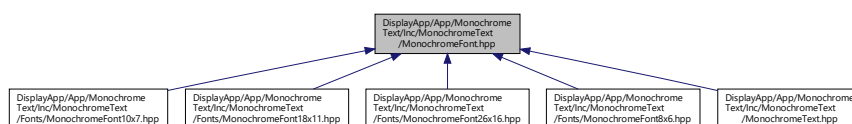

Classes

- class [MonochromeText::MonochromeFont](#)
Monochrome font.

5.17.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.18 MonochromeFont.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef MONOCHROMETEXT_MONOCHROMEFONT_HPP
6 #define MONOCHROMETEXT_MONOCHROMEFONT_HPP
7
8 #include <cstdint>
9 #include <cstdint>
10
11 #include "MonochromeView/ConstView.hpp"
12
13 namespace MonochromeText
14 {
15
16     class MonochromeFont
17     {
18     public:
19         MonochromeFont(const uint8_t* const pCharsBytes,
20             const size_t width,
21             const size_t height,
22             const size_t firstCharAsciiOffset,
23             const size_t charsNum);
24
25         uint8_t GetWidth() const;
26
27         uint8_t GetHeight() const;
28
29         MonochromeView::ConstView GetCharView(const char character) const;
30
31     private:
32         MonochromeFont(const MonochromeFont&) = delete;
33         void operator=(const MonochromeFont&) = delete;
34
35         const size_t m_Width;
36         const size_t m_Height;
37         const size_t m_FirstCharAsciiOffset;
38         const size_t m_CharsNum;
39         const size_t m_SingleCharBytesNum;
40         const uint8_t* const m_pCharsBytes;
41
42     };
43
44 }
45 #endif

```


5.19 DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeText.hpp File Reference

```

#include <cstdint>
#include "MonochromeText/MonochromeFont.hpp"
#include "MonochromeView/DynamicView.hpp"

```


Include dependency graph for MonochromeText.hpp:

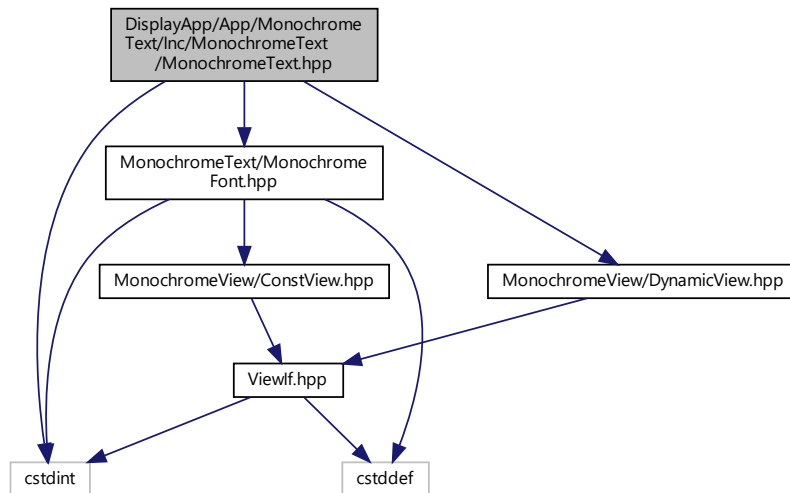

Classes

- class [MonochromeText::MonochromeText](#)
Monochrome text.

5.19.1 Detailed Description

Note

Copyright (c) 2021 ArmC++ - Kala, Jaraczewski

5.20 MonochromeText.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef MONOCHROMETEXT_MONOCHROMETEXT_HPP
6 #define MONOCHROMETEXT_MONOCHROMETEXT_HPP
7
8 #include <stdint>
9
10 #include "MonochromeText/MonochromeFont.hpp"
11 #include "MonochromeView/DynamicView.hpp"
12
13 namespace MonochromeText
14 {
15
17 class MonochromeText
18 {
19 public:
20     static void WriteChar(MonochromeView::DynamicView& rView,
21                           const int32_t x, const int32_t y,
22                           const MonochromeFont& rFont,
23                           const char character,
24                           const uint8_t drawOption = MonochromeView::DRAW_OPT_NONE);
25
26     static void WriteString(MonochromeView::DynamicView& rView,
27                             const int32_t x, const int32_t y,

```

```

44         const MonochromeFont& rFont,
45         const char* const pString,
46         const uint8_t drawOption = MonochromeView::DRAW_OPT_NONE);
47
48 private:
49     MonochromeText(const MonochromeText&) = delete;
50     void operator=(const MonochromeText&) = delete;
51 };
52
53 }
54
55 #endif

```


5.21 DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstStorageView.hpp File Reference

```

#include <cstdint>
#include <cstddef>
#include "MonochromeView/ConstView.hpp"

```

Include dependency graph for ConstStorageView.hpp:

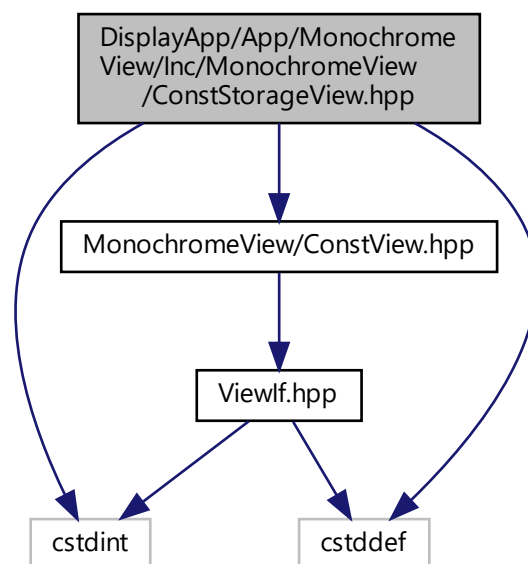

Classes

- class `MonochromeView::ConstStorageView< WIDTH, HEIGHT >`

5.21.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.22 ConstStorageView.hpp

[Go to the documentation of this file.](#)

```


1
4
5 #ifndef MONOCHROMEVIEW_CONSTSTORAGEVIEW_HPP
6 #define MONOCHROMEVIEW_CONSTSTORAGEVIEW_HPP
7
8 #include <cstdint>
9 #include <cstddef>
10
11 #include "MonochromeView/ConstView.hpp"
12
13 namespace MonochromeView
14 {
15
20 template<size_t WIDTH, size_t HEIGHT>
21 class ConstStorageView :
22     public ConstView
23 {
24 public:
25     template<typename... ViewBytesTypes>
26     ConstStorageView(ViewBytesTypes... viewBytes) :
27         ConstView(m_Buffer, WIDTH, HEIGHT),
28         m_Buffer{static_cast<uint8_t>(viewBytes)...}
29     {
30     }
31
32 private:
33     const uint8_t m_Buffer[WIDTH * ((HEIGHT + ViewIf::PIXELS_PER_CELL - 1) / ViewIf::PIXELS_PER_CELL)];
34 };
35
36 #endif

```


5.23 DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstView.hpp File Reference

```
#include "ViewIf.hpp"
```

Include dependency graph for ConstView.hpp:

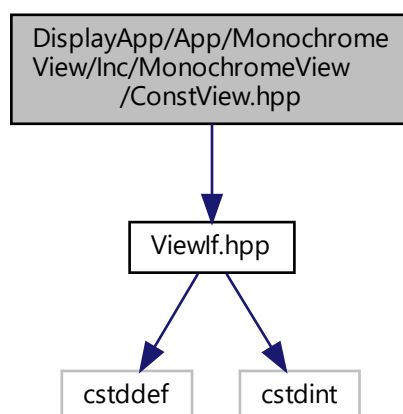

This graph shows which files directly or indirectly include this file:

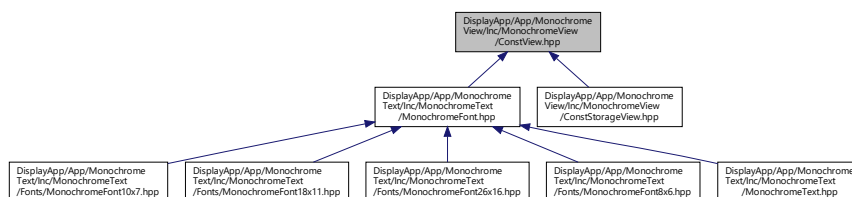

Classes

- class [MonochromeView::ConstView](#)

Constant view.

5.23.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.24 ConstView.hpp


[Go to the documentation of this file.](#)

```

1
4
5 #ifndef MONOCHROMEVIEW_CONSTVIEW_HPP
6 #define MONOCHROMEVIEW_CONSTVIEW_HPP
7
8 #include "ViewIf.hpp"
9
10 namespace MonochromeView
11 {
12
13 class ConstView :
14     public ViewIf
15 {
16 public:
17     ConstView(const uint8_t* const pBuffer, const size_t width, const size_t height);
18
19     size_t Width() const override;
20
21     size_t Height() const override;
22
23     bool GetPixelColor(const size_t x, const size_t y) const override;
24
25     bool IfViewChanged() const;
26
27 private:
28     const uint8_t* Data() const override;
29
30     const uint8_t* const m_pBuffer;
31     const size_t m_Width;
32     const size_t m_Height;
33 };
34
35 #endif
  
```

5.25 DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicStorageView.hpp File Reference

```
#include <stdint>
#include <stddef>
#include "MonochromeView/DynamicView.hpp"
Include dependency graph for DynamicStorageView.hpp:
```

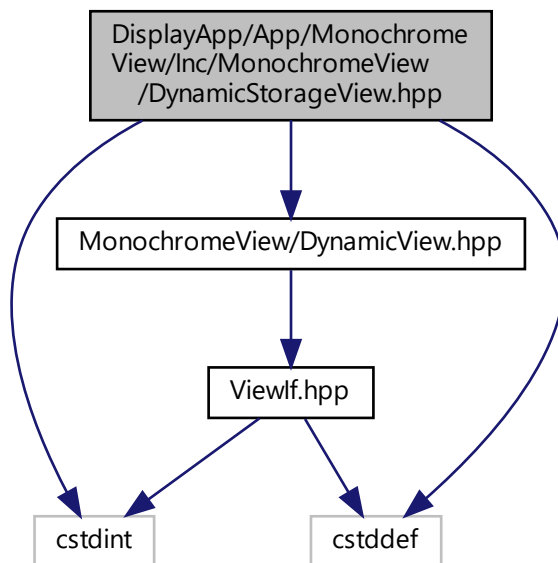

Classes

- class [MonochromeView::DynamicStorageView< WIDTH, HEIGHT >](#)

5.25.1 Detailed Description

Note

Copyright (c) 2021 ArmCpp - Kala, Jaraczewski

5.26 DynamicStorageView.hpp

[Go to the documentation of this file.](#)

```
1
4
5 #ifndef MONOCHROMEVIEW_DYNAMICSTORAGEVIEW_HPP
6 #define MONOCHROMEVIEW_DYNAMICSTORAGEVIEW_HPP
7
8 #include <stdint>
9 #include <stddef>
10
11 #include "MonochromeView/DynamicView.hpp"
12
```

```


13 namespace MonochromeView
14 {
15
20 template<size_t WIDTH, size_t HEIGHT>
21 class DynamicStorageView :
22     public DynamicView
23 {
24 public:
25     template<typename... ViewBytesTypes>
26     DynamicStorageView(ViewBytesTypes... viewBytes) :
27         DynamicView(m_Buffer, WIDTH, HEIGHT),
28         m_Buffer{static_cast<uint8_t>(viewBytes)...}
29     {
30     }
31
32 private:
33     DynamicStorageView(const DynamicStorageView&) = delete;
34     void operator=(const DynamicStorageView&) = delete;
35
36     uint8_t m_Buffer[WIDTH * ((HEIGHT + ViewIf::PIXELS_PER_CELL - 1) / ViewIf::PIXELS_PER_CELL)];
37 };
38
39 #endif

```


5.27 DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicView.hpp File Reference

#include "ViewIf.hpp"

Include dependency graph for DynamicView.hpp:

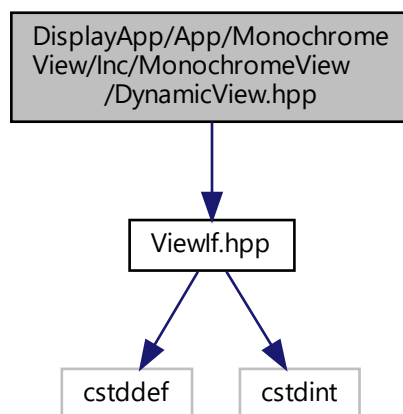

This graph shows which files directly or indirectly include this file:

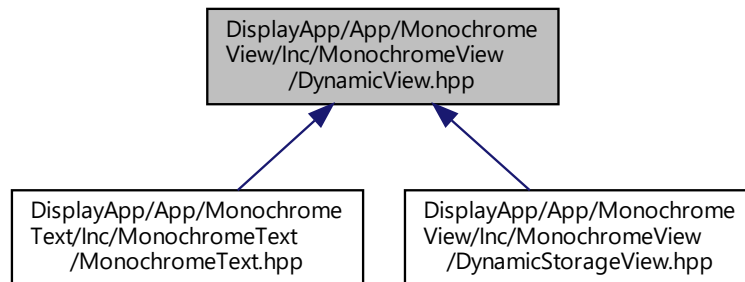

Classes

- class [MonochromeView::DynamicView](#)
Dynamic view.

Variables

- constexpr const uint8_t **MonochromeView::DRAW_OPT_NONE** = 0x00U
No additional draw options.
- constexpr const uint8_t **MonochromeView::DRAW_OPT_TRANSPOSE** = 0x01U
Draw transposition of a view.
- constexpr const uint8_t **MonochromeView::DRAW_OPT_X_MIRROR** = 0x02U
Mirror a view horizontally.
- constexpr const uint8_t **MonochromeView::DRAW_OPT_Y_MIRROR** = 0x04U
Mirror a view vertically.
- constexpr const uint8_t **MonochromeView::DRAW_OPT_NEGATIVE_COLORS** = 0x08U
Negative colors of a view.

5.27.1 Detailed Description

Note

Copyright (c) 2021 ArmCcpp - Kala, Jaraczewski

5.28 DynamicView.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef MONOCHROMEVIEW_DYNAMICVIEW_HPP
6 #define MONOCHROMEVIEW_DYNAMICVIEW_HPP
7
8 #include "ViewIf.hpp"
9
10 namespace MonochromeView
11 {
  
```

```

12
14 constexpr const uint8_t DRAW_OPT_NONE = 0x00U;
15
17 constexpr const uint8_t DRAW_OPT_TRANSPOSE = 0x01U;
18
20 constexpr const uint8_t DRAW_OPT_X_MIRROR = 0x02U;
21
23 constexpr const uint8_t DRAW_OPT_Y_MIRROR = 0x04U;
24
26 constexpr const uint8_t DRAW_OPT_NEGATIVE_COLORS = 0x08U;
27
29 class DynamicView :
30     public ViewIf
31 {
32 public:
33     DynamicView(uint8_t* const pBuffer, const size_t width, const size_t height);
34
35     size_t Width() const override;
36
37     size_t Height() const override;
38
39     bool GetPixelColor(const size_t x, const size_t y) const override;
40
41     bool IfViewChanged() const;
42
43     void DrawAt(const int32_t x,
44                const int32_t y,
45                const ViewIf& rAnotherView,
46                const uint8_t drawOption = DRAW_OPT_NONE);
47
48     void DrawLine(const int32_t x1, const int32_t y1,
49                  const int32_t x2, const int32_t y2,
50                  const bool color);
51
52     void SetPixelColor(const size_t x, const size_t y, const bool color);
53
54     void Fill(const bool color);
55
56 private:
57     DynamicView(const DynamicView&) = delete;
58     void operator=(const DynamicView&) = delete;
59
60     const uint8_t* Data() const override;
61
62     uint8_t* const m_pBuffer;
63     const size_t m_Width;
64     const size_t m_Height;
65     mutable bool m_IfViewChanged;
66 };
67
68 }
69
70 #endif

```


5.29 DisplayApp/App/MonochromeView/Inc/MonochromeView/ViewIf.hpp File Reference

```


#include <cstdint>
#include <cstdint>

```


Include dependency graph for ViewIf.hpp:

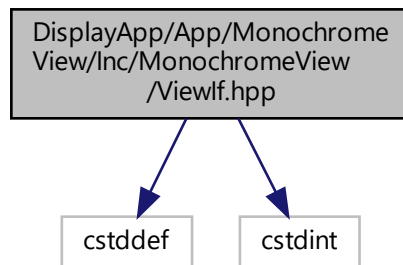

This graph shows which files directly or indirectly include this file:

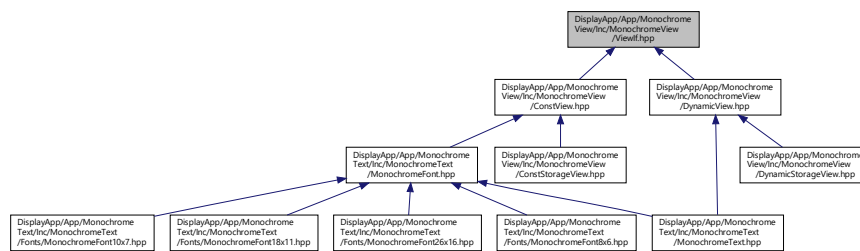

Classes

- class `MonochromeView::ViewIf`
View interface.

5.29.1 Detailed Description

Note

Copyright (c) 2021 ArmC++ - Kala, Jaraczewski

5.30 ViewIf.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef MONOCHROMEVIEW_VIEWIF_HPP
6 #define MONOCHROMEVIEW_VIEWIF_HPP
7
8 #include <cstdint>
9 #include <cstddef>
10
11 namespace MonochromeView
12 {
  
```

```

13
15 class ViewIf
16 {
17 public:
18     static constexpr const size_t PIXELS_PER_CELL = 8U;
19
20     virtual ~ViewIf()
21     {
22     }
23
24     virtual size_t Width() const = 0;
25
26     virtual size_t Height() const = 0;
27
28     virtual const uint8_t* Data() const = 0;
29
30     virtual bool GetPixelColor(const size_t x, const size_t y) const = 0;
31
32     virtual bool IfViewChanged() const = 0;
33 };
34
35 #endif

```


5.31 DisplayApp/App/DisplayComm/Inc/DisplayComm/Factory.hpp File Reference

```

#include <cstdint>
#include "spi.h"
#include "gpio.h"

```

Include dependency graph for Factory.hpp:

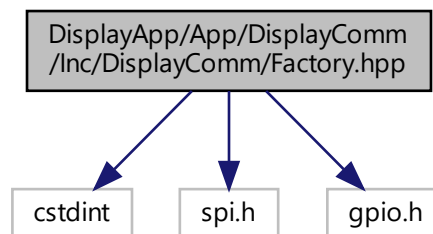

Classes

- class [DisplayComm::Factory](#)
Factory for display communication layer.

5.31.1 Detailed Description

Note

Copyright (c) 2021 ArmCxx - Kala, Jaraczewski

5.32 Factory.hpp

[Go to the documentation of this file.](#)

```

1
4
5 #ifndef DISPLAY_COMM_FACTORY_HPP
6 #define DISPLAY_COMM_FACTORY_HPP
7
8 #include <cstdint>
9
10 #include "spi.h"
11 #include "gpio.h"
12
13 namespace DisplayComm
14 {
15
16 class DisplayCommIf;
17 class DisplayResetIf;
18 class DisplayDataCmdIf;
19
20 class Factory
21 {
22 public:
23     static DisplayResetIf* CreateDisplayReset(GPIO_TypeDef* const pResetPort,
24                                               const uint32_t resetPin);
25
26     static DisplayDataCmdIf* CreateDataCmd(GPIO_TypeDef * const pDcPort,
27                                            const uint32_t dcPin);
28
29     static DisplayCommIf* CreateDisplayCommSpi(SPI_TypeDef* const pSpi,
30                                                GPIO_TypeDef* const pCsPort,
31                                                const uint32_t csPin,
32                                                const DisplayDataCmdIf* const pDataCmdIf);
33 private:
34     Factory(const Factory&) = delete;
35     void operator=(const Factory&) = delete;
36 };
37
38 }
39
40 #endif

```

5.33 Factory.hpp

```

1
4
5 #ifndef SH1106_FACTORY_HPP
6 #define SH1106_FACTORY_HPP
7
8 #include <cstdint>
9
10 namespace MonochromeGraphicDisplay
11 {
12
13 class DisplayDriverIf;
14
15 }
16
17 namespace DisplayComm
18 {
19
20 class DisplayCommIf;
21 class DisplayResetIf;
22
23 }
24
25 namespace Sh1106
26 {
27
28 class Factory
29 {
30 public:
31     static MonochromeGraphicDisplay::DisplayDriverIf* Create128x32Driver(DisplayComm::DisplayCommIf*
32                                const pDisplayCommIf,
33                                DisplayComm::DisplayResetIf*
34                                const pDisplayResetIf,
35                                const bool mirrorVertically =
36                                false,
37                                const bool mirrorHorizontally =
38                                false,
39                                const size_t columnOffset = 0U);
40
41 }
42
43 }

```

```
48
60     static MonochromeGraphicDisplay::DisplayDriverIf* Create128x64Driver(DisplayComm::DisplayCommIf*
61     const pDisplayCommIf,
62                                     DisplayComm::DisplayResetIf*
63     const pDisplayResetIf,
64                                     const bool mirrorVertically =
65     false,
66                                     const bool mirrorHorizontally =
67     false,
68                                     const size_t columnOffset = 0U);
77     static MonochromeGraphicDisplay::DisplayDriverIf* Create128x128Driver(DisplayComm::DisplayCommIf*
78     const pDisplayCommIf,
79                                     DisplayComm::DisplayResetIf*
80     const pDisplayResetIf,
81                                     const bool mirrorVertically =
82     false,
83                                     const bool mirrorHorizontally =
84     false,
85                                     const size_t columnOffset =
86     0U);
87 private:
88     Factory(const Factory&) = delete;
89     void operator=(const Factory&) = delete;
90 };
91 #endif
```


Index

ConstStorageView
 MonochromeView::ConstStorageView< WIDTH,
 HEIGHT >, 6

ConstView
 MonochromeView::ConstView, 8

Create128x128Driver
 Sh1106::Factory, 27

Create128x32Driver
 Sh1106::Factory, 27

Create128x64Driver
 Sh1106::Factory, 28

CreateDataCmd
 DisplayComm::Factory, 25

CreateDisplayCommSpi
 DisplayComm::Factory, 25

CreateDisplayReset
 DisplayComm::Factory, 26

DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayComm.hpp, 35, 36

DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayDataCmd.hpp, 36

DisplayApp/App/DisplayComm/Inc/DisplayComm/DisplayReset.hpp, 37

DisplayApp/App/DisplayComm/Inc/DisplayComm/Factory.hpp, 55, 56

DisplayApp/App/MonochromeGraphicDisplay/Inc/MonochromeGraphicDisplay/DisplayDriverIf.hpp, 37, 38

DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont10x7.hpp, 39, 40

DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont18x24.hpp, 40, 41

DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont26x16.hpp, 41, 42

DisplayApp/App/MonochromeText/Inc/MonochromeText/Fonts/MonochromeFont32x24.hpp, 43

DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeFont.hpp, 44, 45

DisplayApp/App/MonochromeText/Inc/MonochromeText/MonochromeText.hpp, 45, 46

DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstStorageView.hpp, 47, 48

DisplayApp/App/MonochromeView/Inc/MonochromeView/ConstView.hpp, 48, 49

DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicStorageView.hpp, 50

DisplayApp/App/MonochromeView/Inc/MonochromeView/DynamicView.hpp, 51, 52

DisplayApp/App/MonochromeView/Inc/MonochromeView/ViewIf.hpp, 53, 54

DisplayApp/App/Sh1106/Inc/Sh1106/Factory.hpp, 56

DisplayComm::DisplayCommIf, 11
 WriteCmd, 11
 WriteData, 12

DisplayComm::DisplayDataCmdIf, 12

DisplayComm::DisplayResetIf, 16

DisplayComm::Factory, 24
 CreateDataCmd, 25
 CreateDisplayCommSpi, 25
 CreateDisplayReset, 26

DrawAt
 MonochromeView::DynamicView, 22

DrawLine
 MonochromeView::DynamicView, 22

DynamicStorageView
 MonochromeView::DynamicStorageView< WIDTH,
 HEIGHT >, 19

DynamicView
 MonochromeView::DynamicView, 22

Fill
 MonochromeView::DynamicView, 23

GetCharView
 MonochromeText::MonochromeFont, 30

GetHeight
 MonochromeGraphicDisplay::DisplayDriverIf, 14
 MonochromeText::MonochromeFont, 30

GetPixelColor
 MonochromeView::ConstView, 10
 MonochromeView::DynamicView, 23
 MonochromeView::ViewIf, 34

OneGraphicDisplay/DisplayDriverIf.hpp, 14

OneGraphicDisplay/DisplayDriverIf, 14

GetWidth
 MonochromeGraphicDisplay::DisplayDriverIf, 14
 MonochromeText::MonochromeFont, 30

Height
 MonochromeFont26x16.hpp, 41, 42
 MonochromeView::ConstView, 10
 MonochromeView::DynamicView, 23
 MonochromeView::ViewIf, 34

InverseColor
 MonochromeView::ConstView, 10
 MonochromeView::DynamicView, 23
 MonochromeView::ViewIf, 34

MonochromeGraphicDisplay::DisplayDriverIf, 14

MonochromeFont
 DynamicStorageView.hpp, 50
 MonochromeText::MonochromeFont, 29

MonochromeGraphicDisplay::DisplayDriverIf, 13

GetHeight, 14

GetView, 14

GetWidth, 14

InverseColor, 14

RefreshScreen, 15

SetContrast, 15

TurnOffDisplay, 15

TurnOnDisplay, 15

MonochromeText::MonochromeFont, 29

- GetCharView, [30](#)
- GetHeight, [30](#)
- GetWidth, [30](#)
- MonochromeFont, [29](#)
- MonochromeText::MonochromeText, [31](#)
 - WriteChar, [31](#)
 - WriteString, [32](#)
- MonochromeView::ConstStorageView< WIDTH, HEIGHT >, [3](#)
 - ConstStorageView, [6](#)
- MonochromeView::ConstView, [6](#)
 - ConstView, [8](#)
 - GetPixelColor, [10](#)
 - Height, [10](#)
 - IfViewChanged, [10](#)
 - Width, [10](#)
- MonochromeView::DynamicStorageView< WIDTH, HEIGHT >, [17](#)
 - DynamicStorageView, [19](#)
- MonochromeView::DynamicView, [19](#)
 - DrawAt, [22](#)
 - DrawLine, [22](#)
 - DynamicView, [22](#)
 - Fill, [23](#)
 - GetPixelColor, [23](#)
 - Height, [23](#)
 - IfViewChanged, [23](#)
 - SetPixelColor, [24](#)
 - Width, [24](#)
- MonochromeView::ViewIf, [32](#)
 - GetPixelColor, [34](#)
 - Height, [34](#)
 - IfViewChanged, [34](#)
 - Width, [35](#)
- RefreshScreen
 - MonochromeGraphicDisplay::DisplayDriverIf, [15](#)
- SetContrast
 - MonochromeGraphicDisplay::DisplayDriverIf, [15](#)
- SetPixelColor
 - MonochromeView::DynamicView, [24](#)
- Sh1106::Factory, [26](#)
 - Create128x128Driver, [27](#)
 - Create128x32Driver, [27](#)
 - Create128x64Driver, [28](#)
- TurnOffDisplay
 - MonochromeGraphicDisplay::DisplayDriverIf, [15](#)
- TurnOnDisplay
 - MonochromeGraphicDisplay::DisplayDriverIf, [15](#)
- Width
 - MonochromeView::ConstView, [10](#)
 - MonochromeView::DynamicView, [24](#)
 - MonochromeView::ViewIf, [35](#)
- WriteChar
 - MonochromeText::MonochromeText, [31](#)
- WriteCmd
 - DisplayComm::DisplayCommIf, [11](#)
 - WriteData
 - DisplayComm::DisplayCommIf, [12](#)
 - WriteString
 - MonochromeText::MonochromeText, [32](#)