

Getting Started guide for mtcars Clustering App

DP

21/06/2015

This is the first part of the Developing Data Products project course of the Coursera Data Science Specialization. This file is intended to be the documentation of the Shiny Application.

In this application we use mtcars; one of the most viewed dataset in this specialization.

mtcars

##	mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
## Mazda RX4	21.0	6	160.0	110	3.90	2.620	16.46	0	1	4	4
## Mazda RX4 Wag	21.0	6	160.0	110	3.90	2.875	17.02	0	1	4	4
## Datsun 710	22.8	4	108.0	93	3.85	2.320	18.61	1	1	4	1
## Hornet 4 Drive	21.4	6	258.0	110	3.08	3.215	19.44	1	0	3	1
## Hornet Sportabout	18.7	8	360.0	175	3.15	3.440	17.02	0	0	3	2
## Valiant	18.1	6	225.0	105	2.76	3.460	20.22	1	0	3	1
## Duster 360	14.3	8	360.0	245	3.21	3.570	15.84	0	0	3	4
## Merc 240D	24.4	4	146.7	62	3.69	3.190	20.00	1	0	4	2
## Merc 230	22.8	4	140.8	95	3.92	3.150	22.90	1	0	4	2
## Merc 280	19.2	6	167.6	123	3.92	3.440	18.30	1	0	4	4
## Merc 280C	17.8	6	167.6	123	3.92	3.440	18.90	1	0	4	4
## Merc 450SE	16.4	8	275.8	180	3.07	4.070	17.40	0	0	3	3
## Merc 450SL	17.3	8	275.8	180	3.07	3.730	17.60	0	0	3	3
## Merc 450SLC	15.2	8	275.8	180	3.07	3.780	18.00	0	0	3	3
## Cadillac Fleetwood	10.4	8	472.0	205	2.93	5.250	17.98	0	0	3	4
## Lincoln Continental	10.4	8	460.0	215	3.00	5.424	17.82	0	0	3	4
## Chrysler Imperial	14.7	8	440.0	230	3.23	5.345	17.42	0	0	3	4
## Fiat 128	32.4	4	78.7	66	4.08	2.200	19.47	1	1	4	1
## Honda Civic	30.4	4	75.7	52	4.93	1.615	18.52	1	1	4	2
## Toyota Corolla	33.9	4	71.1	65	4.22	1.835	19.90	1	1	4	1
## Toyota Corona	21.5	4	120.1	97	3.70	2.465	20.01	1	0	3	1
## Dodge Challenger	15.5	8	318.0	150	2.76	3.520	16.87	0	0	3	2
## AMC Javelin	15.2	8	304.0	150	3.15	3.435	17.30	0	0	3	2
## Camaro Z28	13.3	8	350.0	245	3.73	3.840	15.41	0	0	3	4
## Pontiac Firebird	19.2	8	400.0	175	3.08	3.845	17.05	0	0	3	2
## Fiat X1-9	27.3	4	79.0	66	4.08	1.935	18.90	1	1	4	1
## Porsche 914-2	26.0	4	120.3	91	4.43	2.140	16.70	0	1	5	2
## Lotus Europa	30.4	4	95.1	113	3.77	1.513	16.90	1	1	5	2
## Ford Pantera L	15.8	8	351.0	264	4.22	3.170	14.50	0	1	5	4
## Ferrari Dino	19.7	6	145.0	175	3.62	2.770	15.50	0	1	5	6
## Maserati Bora	15.0	8	301.0	335	3.54	3.570	14.60	0	1	5	8
## Volvo 142E	21.4	4	121.0	109	4.11	2.780	18.60	1	1	4	2

You can see more details on this site <https://stat.ethz.ch/R-manual/R-devel/library/datasets/html/mtcars.html>

Starting from two of the variables of the dataset:


```
names(mtcars)
```

```
## [1] "mpg" "cyl" "disp" "hp" "drat" "wt" "qsec" "vs" "am" "gear"  
## [11] "carb"
```

the goal of the application is to clusterize the cars.

The application present itself with a side panel where you can choose:

- The variables to be represented in the graph
- The number of clusters

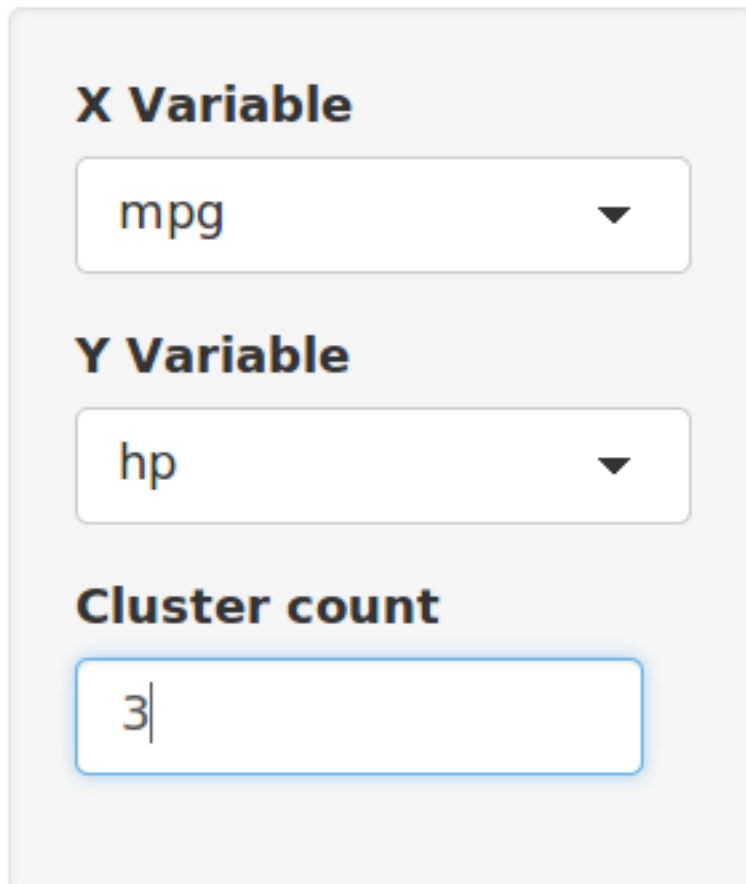

X Variable

mpg ▼

Y Variable

hp ▼

Cluster count

3|

In particular we need the number of clusters, because this is an input value of the **k-means** method; the algorithm used to perform the clusterization. In the picture below we can see an example of the result of the application. The graph shows also the centers of the clusters.

